SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp®2006 = 16.0

SPECfp_base2006 = 15.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

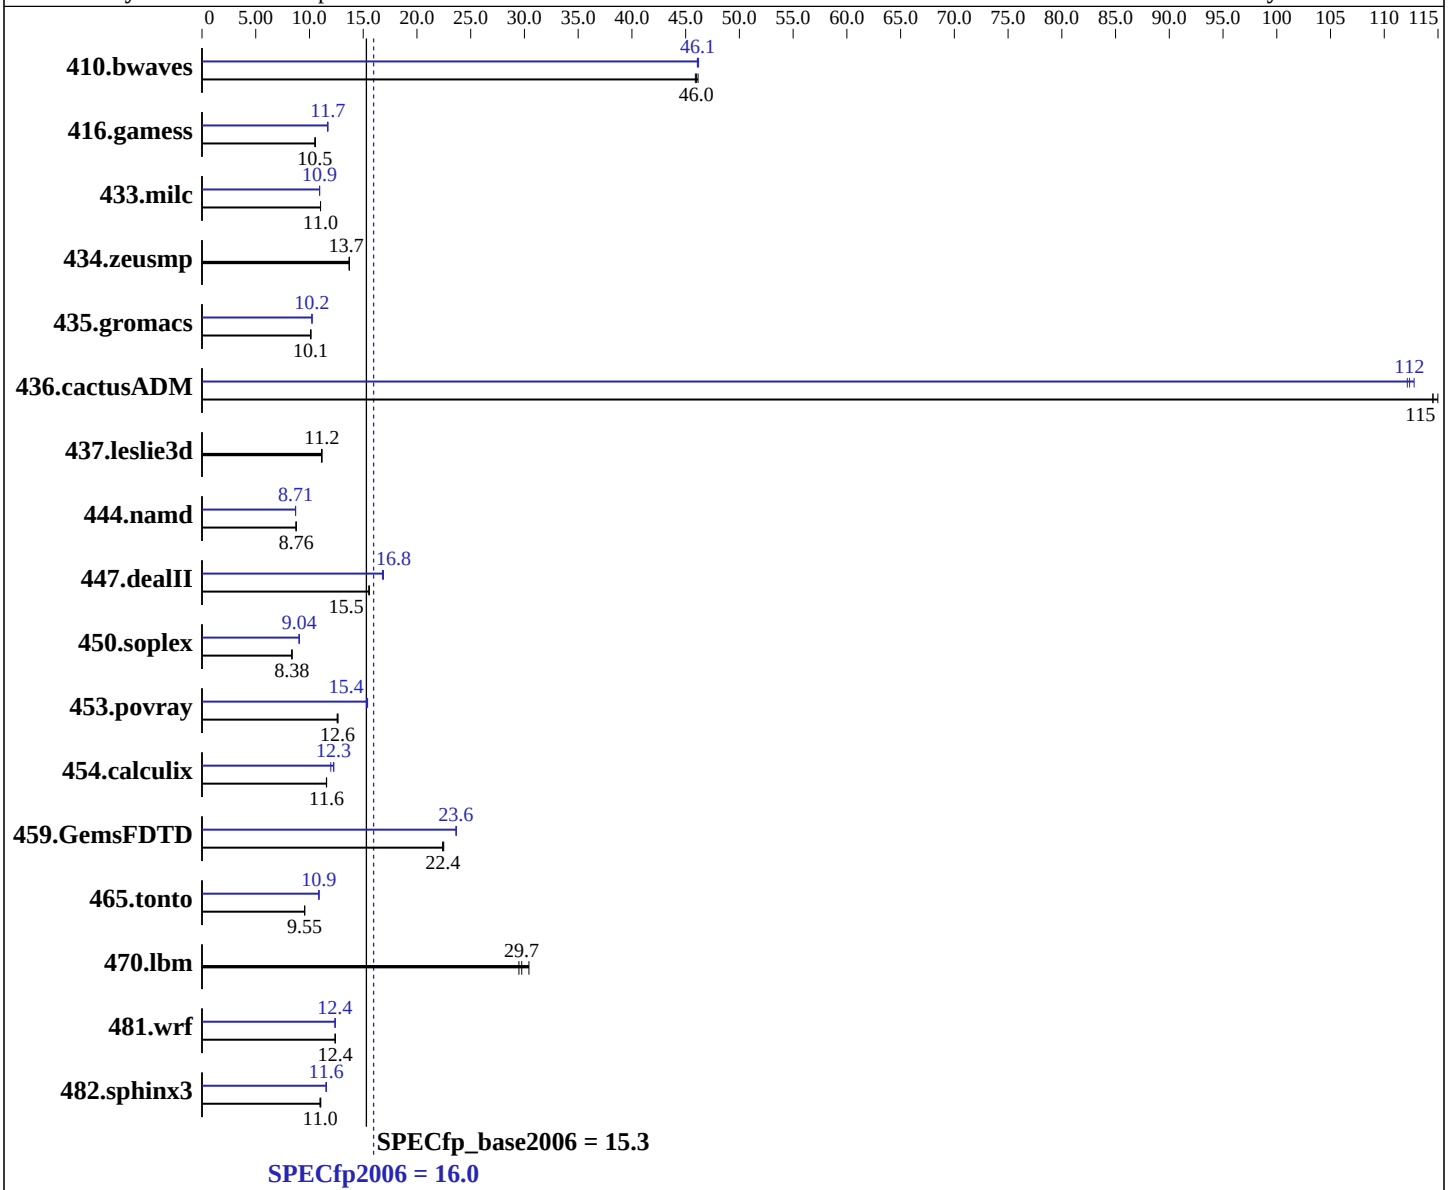

Hardware

CPU Name:	Intel Xeon E7310
CPU Characteristics:	1066 MHz system bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074, l_fproc_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp2006 = 16.0

SPECfp_base2006 = 15.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x146.5 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**295**	**46.0**	294	46.2	296	45.9	295	46.1	294	46.2	**295**	**46.1**
416.gamess	1854	10.6	**1862**	**10.5**	1864	10.5	1677	11.7	1672	11.7	**1672**	**11.7**
433.milc	833	11.0	832	11.0	**832**	**11.0**	839	10.9	**839**	**10.9**	839	10.9
434.zeusmp	664	13.7	665	13.7	**664**	**13.7**	664	13.7	665	13.7	**664**	**13.7**
435.gromacs	705	10.1	706	10.1	**705**	**10.1**	697	10.2	**698**	**10.2**	698	10.2
436.cactusADM	104	115	**104**	**115**	104	115	107	112	106	113	**106**	**112**
437.leslie3d	**843**	**11.2**	842	11.2	845	11.1	**843**	**11.2**	842	11.2	845	11.1
444.namd	915	8.76	**915**	**8.76**	916	8.75	**921**	**8.71**	921	8.71	921	8.71
447.dealII	**736**	**15.5**	737	15.5	735	15.6	**679**	**16.8**	681	16.8	678	16.9
450.soplex	995	8.38	**996**	**8.38**	1000	8.34	922	9.04	923	9.04	**922**	**9.04**
453.povray	**421**	**12.6**	423	12.6	421	12.6	348	15.3	345	15.4	**346**	**15.4**
454.calculix	**712**	**11.6**	712	11.6	713	11.6	689	12.0	673	12.3	**673**	**12.3**
459.GemsFDTD	**473**	**22.4**	474	22.4	472	22.5	449	23.7	**449**	**23.6**	449	23.6
465.tonto	1029	9.56	1031	9.54	**1031**	**9.55**	**904**	**10.9**	904	10.9	905	10.9
470.lbm	452	30.4	**462**	**29.7**	466	29.5	452	30.4	**462**	**29.7**	466	29.5
481.wrf	902	12.4	**901**	**12.4**	901	12.4	**902**	**12.4**	901	12.4	902	12.4
482.sphinx3	1773	11.0	1763	11.1	**1771**	**11.0**	1691	11.5	**1684**	**11.6**	1683	11.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Enabled
Adjacent Cache Line Prefetch:     Enabled
FSB High Bandwidth Optimization: Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/074/bin/ia32/icc
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/074/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.html`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.xml`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:36:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 April 2009.