



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp®2006 = 42.0

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon W5580)

SPECfp_base2006 = 39.7

CPU2006 license: 9016


Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

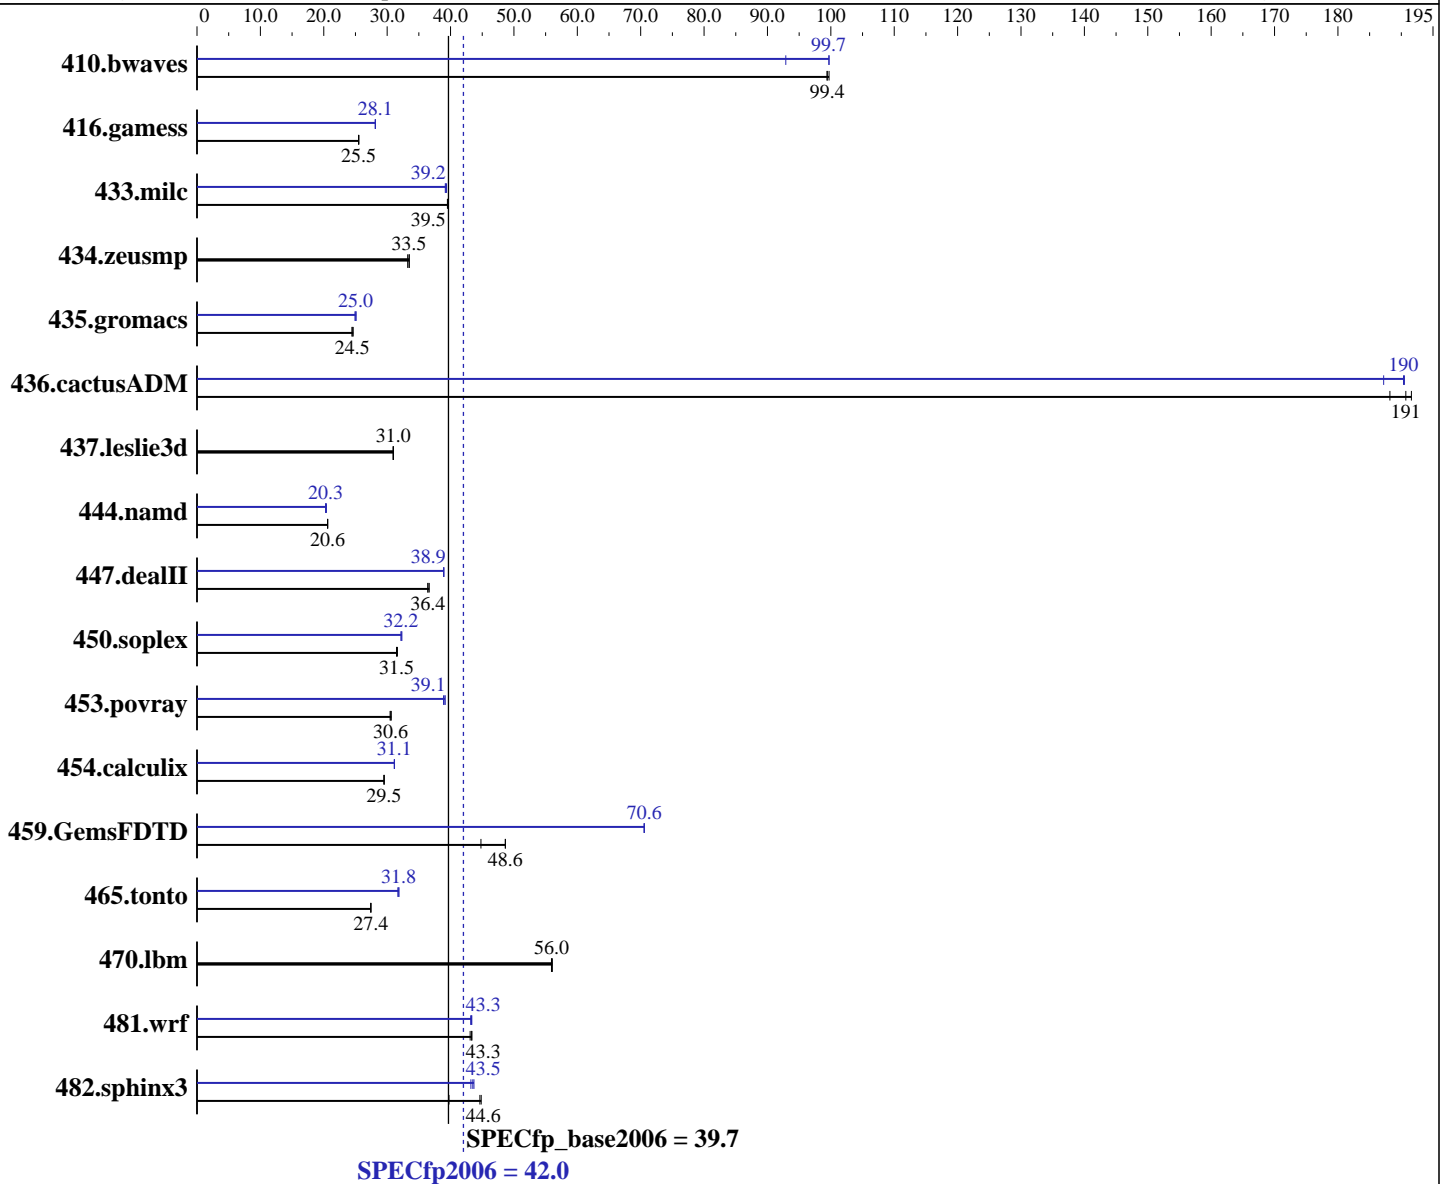

Hardware

CPU Name: Intel Xeon W5580
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2
 Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080,
 l_cprof_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = **42.0**

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon W5580)

SPECfp_base2006 = **39.7**

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 X 4 GB PC3-10600R, CL=9)
Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	137	99.4	136	99.7	137	99.4	146	92.9	136	99.7	136	99.7
416.gamess	766	25.5	768	25.5	768	25.5	696	28.1	696	28.1	695	28.2
433.milc	232	39.5	232	39.5	232	39.5	234	39.2	233	39.4	234	39.2
434.zeusmp	274	33.2	272	33.5	272	33.5	274	33.2	272	33.5	272	33.5
435.gromacs	290	24.6	292	24.5	292	24.5	284	25.1	285	25.0	286	24.9
436.cactusADM	62.4	192	62.7	191	63.5	188	63.8	187	62.7	190	62.8	190
437.leslie3d	304	30.9	304	31.0	303	31.0	304	30.9	304	31.0	303	31.0
444.namd	389	20.6	389	20.6	389	20.6	393	20.4	395	20.3	395	20.3
447.dealII	312	36.6	314	36.4	314	36.4	294	38.9	294	38.9	294	38.9
450.soplex	264	31.6	265	31.5	265	31.5	259	32.2	259	32.2	258	32.3
453.povray	174	30.6	174	30.6	175	30.5	136	39.1	137	38.9	136	39.1
454.calculix	279	29.5	280	29.5	279	29.5	265	31.2	265	31.1	265	31.1
459.GemsFDTD	218	48.6	218	48.6	237	44.8	150	70.6	150	70.6	150	70.6
465.tonto	359	27.4	359	27.4	359	27.4	311	31.7	309	31.8	309	31.8
470.lbm	246	55.9	245	56.1	246	56.0	246	55.9	245	56.1	246	56.0
481.wrf	258	43.3	258	43.4	259	43.1	258	43.4	259	43.2	258	43.3
482.sphinx3	490	39.8	435	44.8	437	44.6	448	43.5	451	43.2	446	43.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M

Platform Notes

BIOS setting:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled
Tested system case compliance with Intel EEB 3.61 spec
SSI Server Power Supply 650W or higher
System was configured with ASPEED AST2050 VGA (on board VGA)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 42.0

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon W5580)

SPECfp_base2006 = 39.7

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 42.0

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon W5580)

SPECfp_base2006 = 39.7

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 42.0

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon W5580)

SPECfp_base2006 = 39.7

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 42.0

ASUS TS700-E6 (Z8PE-D12X) server system (Intel Xeon W5580)

SPECfp_base2006 = 39.7

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:39:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.