SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-950)

SPECfp®2006 = 32.4

SPECfp_base2006 = 30.6

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

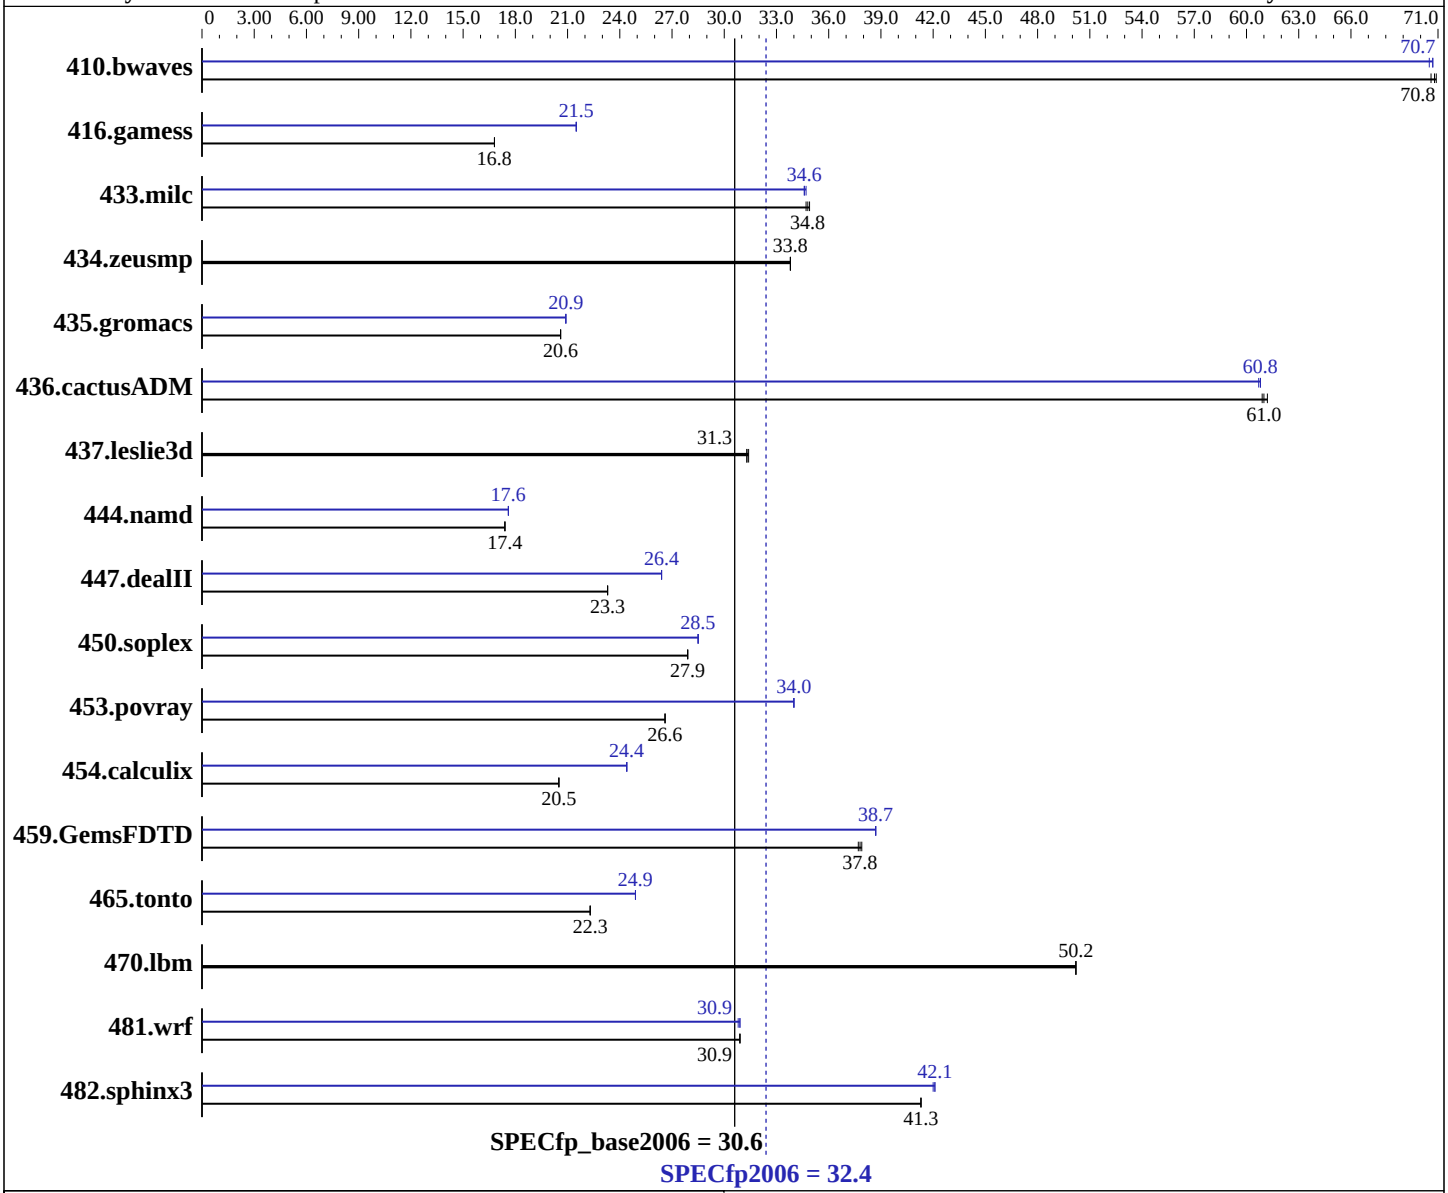

Hardware

CPU Name:	Intel Core i7-950
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	3066
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Intel Visual Fortran Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cprof_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	Yes
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-950)

SPECfp2006 = 32.4

SPECfp_base2006 = 30.6

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	193	70.6	192	70.9	**192**	**70.8**	192	70.7	**192**	**70.7**	193	70.5
416.gamess	1165	16.8	**1166**	**16.8**	1168	16.8	**909**	**21.5**	909	21.5	909	21.5
433.milc	265	34.7	263	34.9	**264**	**34.8**	**265**	**34.6**	265	34.7	265	34.6
434.zeusmp	269	33.8	270	33.8	**269**	**33.8**	269	33.8	270	33.8	**269**	**33.8**
435.gromacs	346	20.6	346	20.6	**346**	**20.6**	342	20.9	342	20.9	**342**	**20.9**
436.cactusADM	195	61.2	196	60.9	**196**	**61.0**	197	60.8	197	60.7	**197**	**60.8**
437.leslie3d	**300**	**31.3**	300	31.4	300	31.3	**300**	**31.3**	300	31.4	300	31.3
444.namd	460	17.4	**460**	**17.4**	460	17.4	457	17.6	**457**	**17.6**	457	17.6
447.dealII	490	23.3	**490**	**23.3**	491	23.3	434	26.4	**434**	**26.4**	434	26.4
450.soplex	299	27.9	**299**	**27.9**	299	27.9	293	28.5	293	28.5	**293**	**28.5**
453.povray	200	26.6	200	26.6	**200**	**26.6**	**157**	**34.0**	156	34.0	157	34.0
454.calculix	402	20.5	403	20.5	**403**	**20.5**	339	24.4	339	24.4	**339**	**24.4**
459.GemsFDTD	**281**	**37.8**	281	37.7	280	37.9	274	38.7	274	38.7	**274**	**38.7**
465.tonto	442	22.3	**442**	**22.3**	442	22.3	395	24.9	**395**	**24.9**	395	24.9
470.lbm	274	50.2	274	50.2	**274**	**50.2**	274	50.2	274	50.2	**274**	**50.2**
481.wrf	362	30.9	**362**	**30.9**	362	30.9	361	30.9	362	30.8	**362**	**30.9**
482.sphinx3	472	41.3	472	41.3	**472**	**41.3**	463	42.1	**463**	**42.1**	464	42.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:36:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.