



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 925)

SPECfp®2006 = 17.2

SPECfp_base2006 = 17.0

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

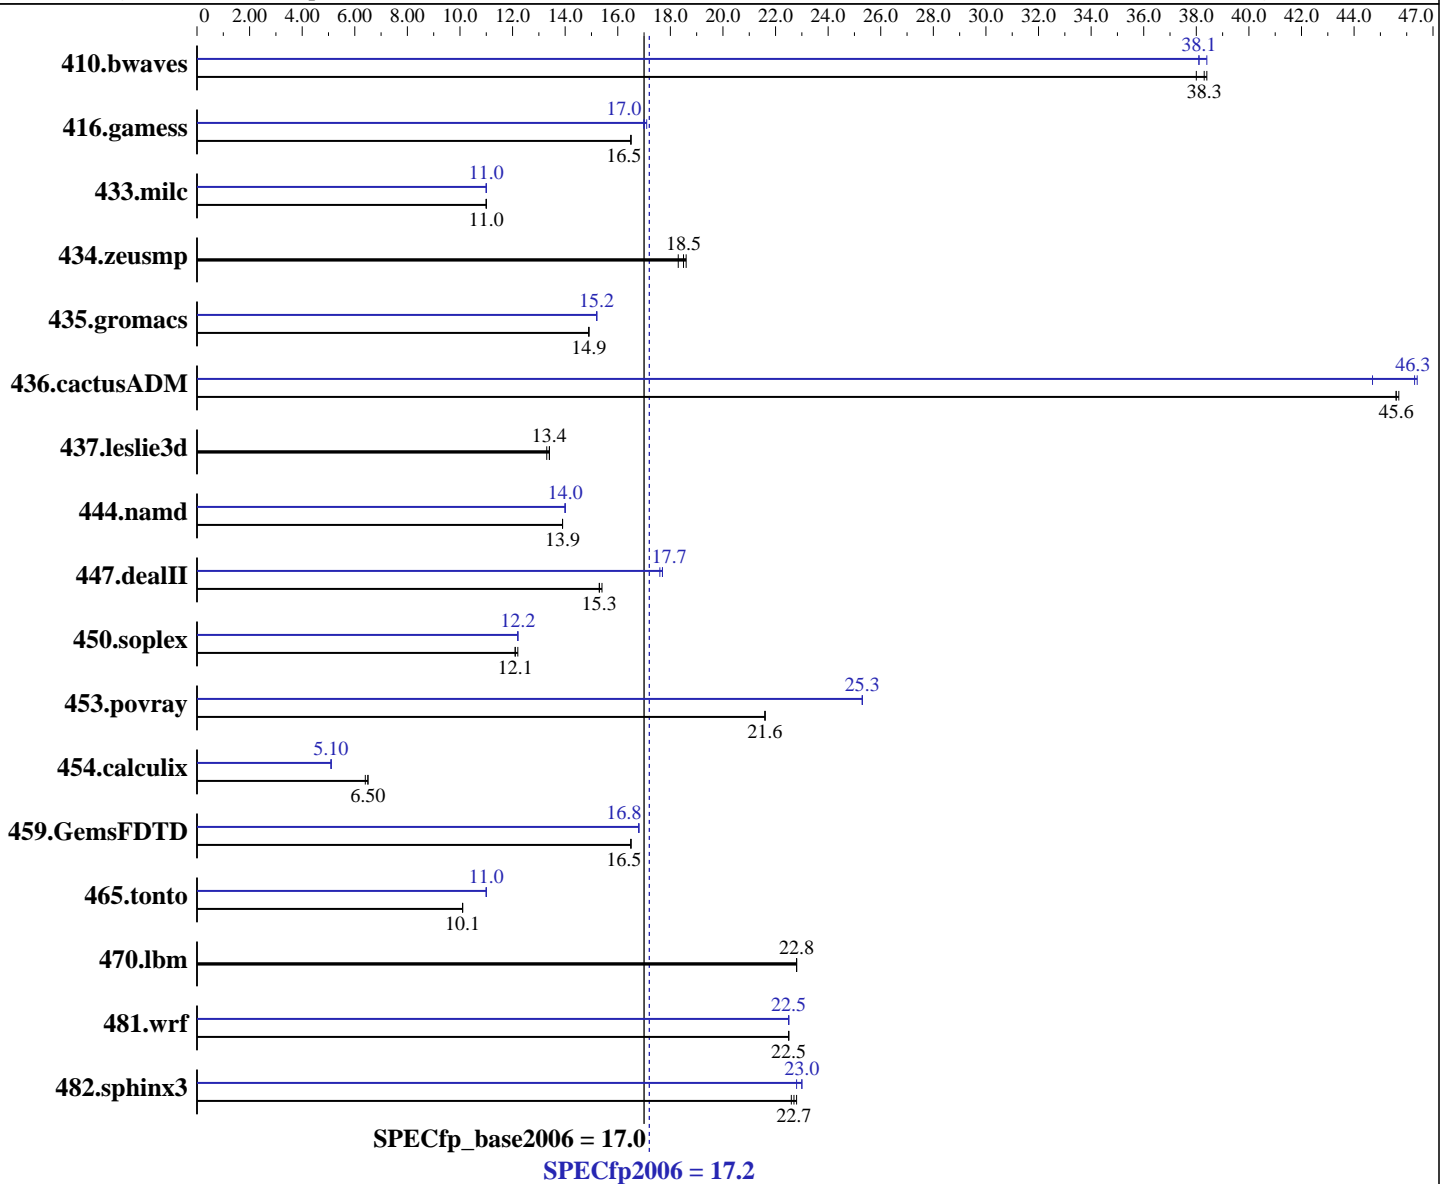

Hardware

CPU Name: AMD Phenom II X4 925
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 925)

SPECfp2006 = 17.2

SPECfp_base2006 = 17.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	357	38.0	354	38.4	355	38.3	357	38.1	356	38.1	354	38.4
416.gamess	1186	16.5	1185	16.5	1185	16.5	1149	17.0	1148	17.1	1149	17.0
433.milc	831	11.0	831	11.0	831	11.0	833	11.0	833	11.0	833	11.0
434.zeusmp	491	18.5	490	18.6	497	18.3	491	18.5	490	18.6	497	18.3
435.gromacs	478	14.9	478	14.9	478	14.9	471	15.2	471	15.2	471	15.2
436.cactusADM	262	45.7	262	45.6	262	45.6	267	44.7	258	46.4	258	46.3
437.leslie3d	708	13.3	703	13.4	703	13.4	708	13.3	703	13.4	703	13.4
444.namd	578	13.9	578	13.9	577	13.9	573	14.0	573	14.0	573	14.0
447.dealII	749	15.3	747	15.3	743	15.4	645	17.7	646	17.7	650	17.6
450.soplex	690	12.1	686	12.2	687	12.1	685	12.2	684	12.2	684	12.2
453.povray	247	21.6	246	21.6	246	21.6	211	25.3	211	25.3	211	25.3
454.calculix	1280	6.40	1277	6.50	1277	6.50	1632	5.10	1632	5.10	1633	5.10
459.GemsFDTD	642	16.5	645	16.5	645	16.5	631	16.8	632	16.8	632	16.8
465.tonto	977	10.1	976	10.1	977	10.1	896	11.0	896	11.0	897	11.0
470.lbm	602	22.8	602	22.8	603	22.8	602	22.8	602	22.8	603	22.8
481.wrf	497	22.5	496	22.5	497	22.5	497	22.5	497	22.5	496	22.5
482.sphinx3	861	22.6	857	22.7	856	22.8	855	22.8	848	23.0	848	23.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 925)

SPECfp2006 = 17.2

SPECfp_base2006 = 17.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

/F1000000000

C++ benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

-Qcxx-features /F1000000000 shlw32m.lib

-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

/F1000000000

Benchmarks using both Fortran and C:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

/F1000000000

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 925)

SPECfp2006 = 17.2

SPECfp_base2006 = 17.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel /F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 925)

SPECfp2006 = 17.2

SPECfp_base2006 = 17.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

416.gamess: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch
-Qparallel /F1000000000

465.tonto: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

454.calculix: /arch:SSE2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel /F1000000000

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:38:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.