



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X4 9850)

SPECfp[®]2006 = 14.9

SPECfp_base2006 = 14.8

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

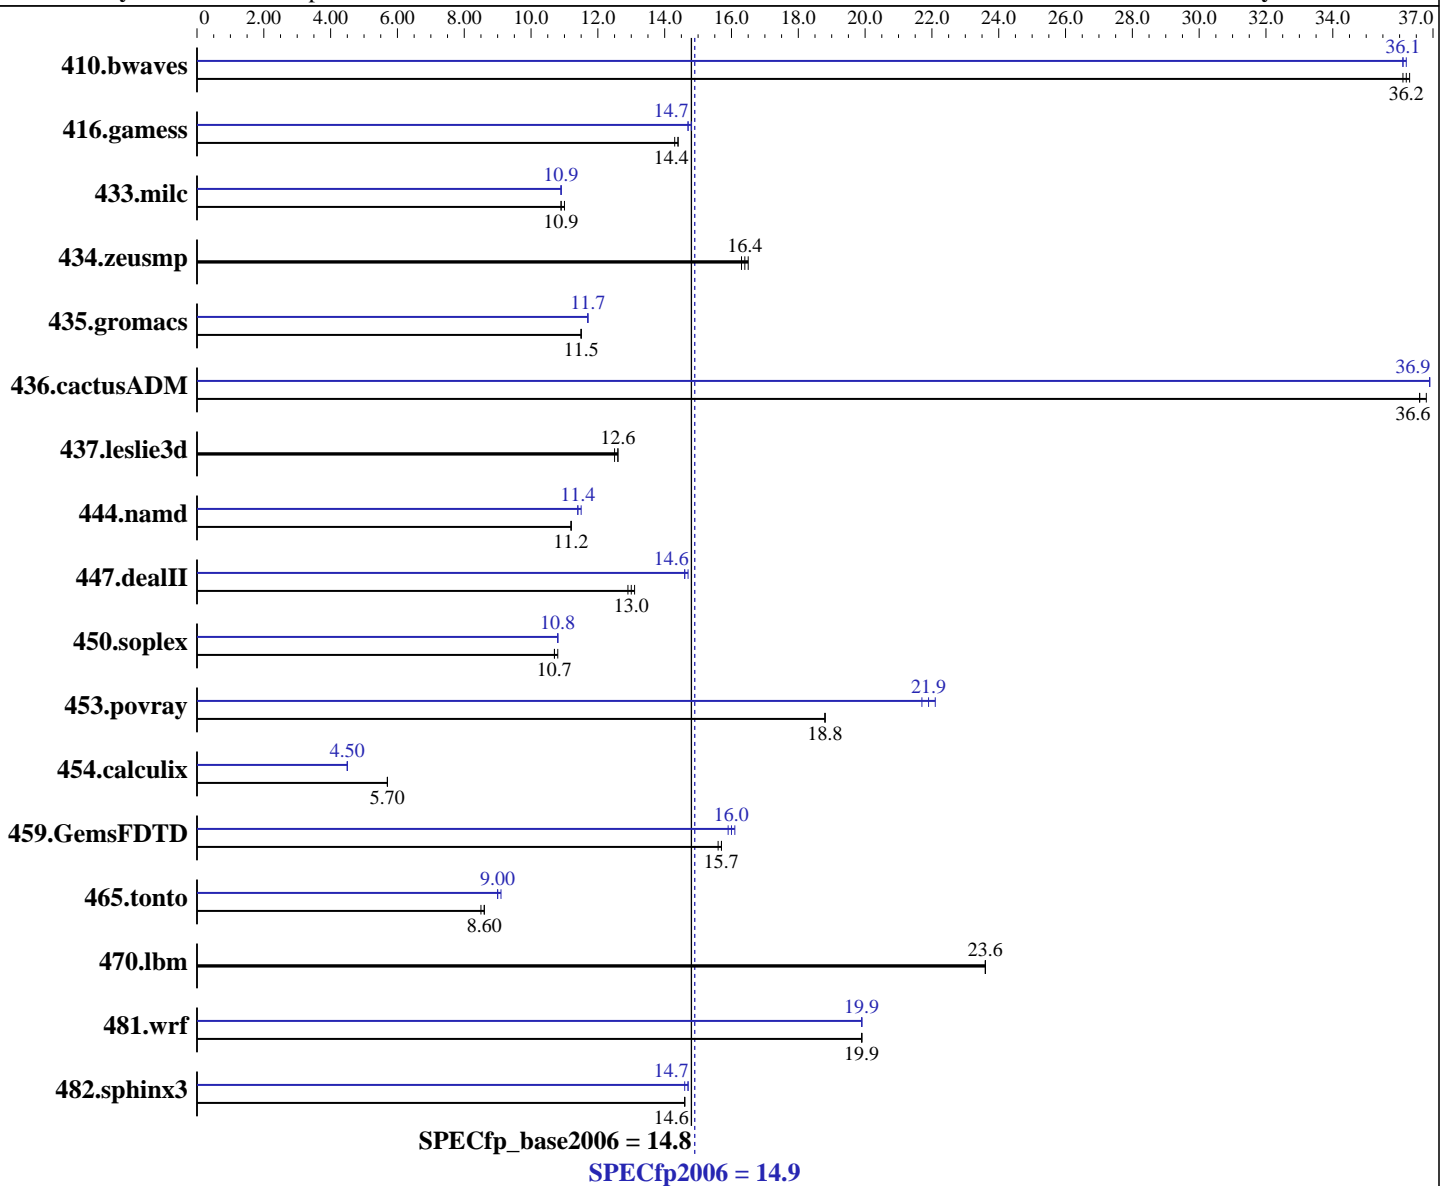

Hardware

CPU Name: AMD Phenom X4 9850
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X4 9850)

SPECfp2006 = 14.9

SPECfp_base2006 = 14.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	376	36.1	375	36.2	374	36.3	376	36.2	377	36.1	377	36.1
416.gamess	1364	14.4	1369	14.3	1363	14.4	1335	14.7	1327	14.8	1332	14.7
433.milc	839	10.9	838	11.0	839	10.9	842	10.9	842	10.9	843	10.9
434.zeusmp	558	16.3	555	16.4	550	16.5	558	16.3	555	16.4	550	16.5
435.gromacs	620	11.5	620	11.5	620	11.5	611	11.7	610	11.7	610	11.7
436.cactusADM	324	36.8	327	36.6	326	36.6	324	36.9	324	36.9	324	36.9
437.leslie3d	747	12.6	750	12.5	748	12.6	747	12.6	750	12.5	748	12.6
444.namd	715	11.2	714	11.2	716	11.2	700	11.5	701	11.4	702	11.4
447.dealII	875	13.1	879	13.0	885	12.9	784	14.6	777	14.7	782	14.6
450.soplex	775	10.8	776	10.7	777	10.7	771	10.8	771	10.8	770	10.8
453.povray	283	18.8	283	18.8	282	18.8	245	21.7	241	22.1	243	21.9
454.calculix	1457	5.70	1457	5.70	1460	5.70	1845	4.50	1844	4.50	1843	4.50
459.GemsFDTD	676	15.7	675	15.7	679	15.6	661	16.1	668	15.9	663	16.0
465.tonto	1151	8.60	1159	8.50	1147	8.60	1086	9.10	1088	9.00	1090	9.00
470.lbm	582	23.6	583	23.6	582	23.6	582	23.6	583	23.6	582	23.6
481.wrf	562	19.9	561	19.9	562	19.9	563	19.9	562	19.9	562	19.9
482.sphinx3	1336	14.6	1335	14.6	1333	14.6	1331	14.6	1329	14.7	1329	14.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X4 9850)

SPECfp2006 = 14.9

SPECfp_base2006 = 14.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

C++ benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X4 9850)

SPECfp2006 = 14.9

SPECfp_base2006 = 14.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel /F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X4 9850)

SPECfp2006 = 14.9

SPECfp_base2006 = 14.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

416.gamess: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch
-Qparallel /F1000000000

465.tonto: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

454.calculix: /arch:SSE2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel /F1000000000

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:28:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.