



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp®2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176


Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

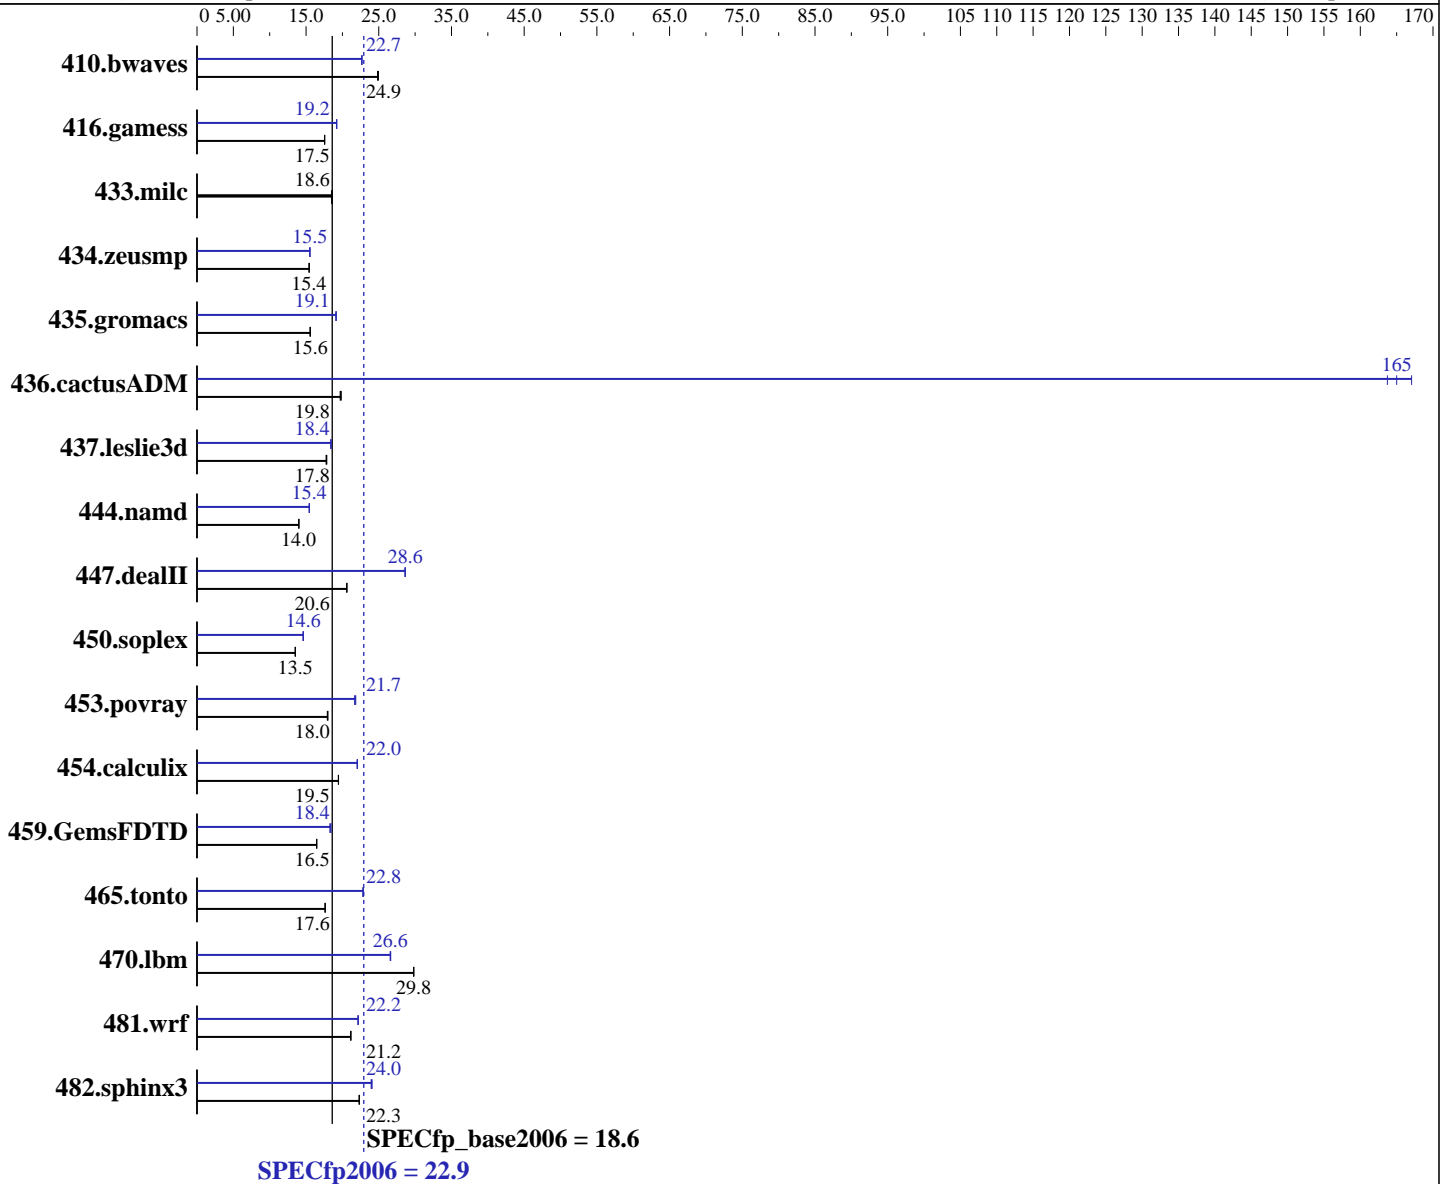

Hardware

CPU Name: AMD Opteron 2439 SE
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = **22.9**

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = **18.6**

CPU2006 license: 001176

Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 80 GB SATA, 5400 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	547	24.8	544	25.0	547	24.9	599	22.7	600	22.7	599	22.7
416.gamess	1116	17.5	1114	17.6	1116	17.5	1020	19.2	1019	19.2	1019	19.2
433.milc	494	18.6	493	18.6	496	18.5	494	18.6	493	18.6	496	18.5
434.zeusmp	589	15.4	590	15.4	590	15.4	586	15.5	586	15.5	586	15.5
435.gromacs	458	15.6	459	15.6	458	15.6	373	19.1	373	19.1	373	19.1
436.cactusADM	605	19.8	607	19.7	602	19.8	72.4	165	73.0	164	71.5	167
437.leslie3d	529	17.8	526	17.9	528	17.8	510	18.4	511	18.4	510	18.4
444.namd	572	14.0	573	14.0	573	14.0	519	15.4	520	15.4	519	15.5
447.dealII	555	20.6	555	20.6	555	20.6	400	28.6	399	28.6	400	28.6
450.soplex	617	13.5	617	13.5	617	13.5	571	14.6	571	14.6	571	14.6
453.povray	296	18.0	297	17.9	296	18.0	245	21.7	245	21.7	244	21.8
454.calculix	424	19.4	424	19.5	424	19.5	374	22.1	374	22.0	374	22.0
459.GemsFDTD	644	16.5	644	16.5	645	16.4	581	18.3	577	18.4	576	18.4
465.tonto	558	17.6	559	17.6	558	17.6	431	22.8	430	22.9	431	22.8
470.lbm	461	29.8	461	29.8	461	29.8	517	26.6	517	26.6	516	26.6
481.wrf	528	21.2	528	21.1	528	21.2	504	22.2	504	22.2	504	22.2
482.sphinx3	873	22.3	874	22.3	873	22.3	814	24.0	812	24.0	809	24.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176

Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/usr/cpu2006/amd0905is-libs/64:/usr/cpu2006/amd0905is-libs/32"

NCPUS = "12"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

System can be built with CSE-808T-980(B/V) Revision A4

Product description can be obtained at:

<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMT+.cfm>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176

Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176

Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176

Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176

Test date: Sep-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.9

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp_base2006 = 18.6

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:41:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 September 2009.