



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint®\_rate2006 = 69.7**

PRIMERGY RX200 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_rate\_base2006 = 65.1**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

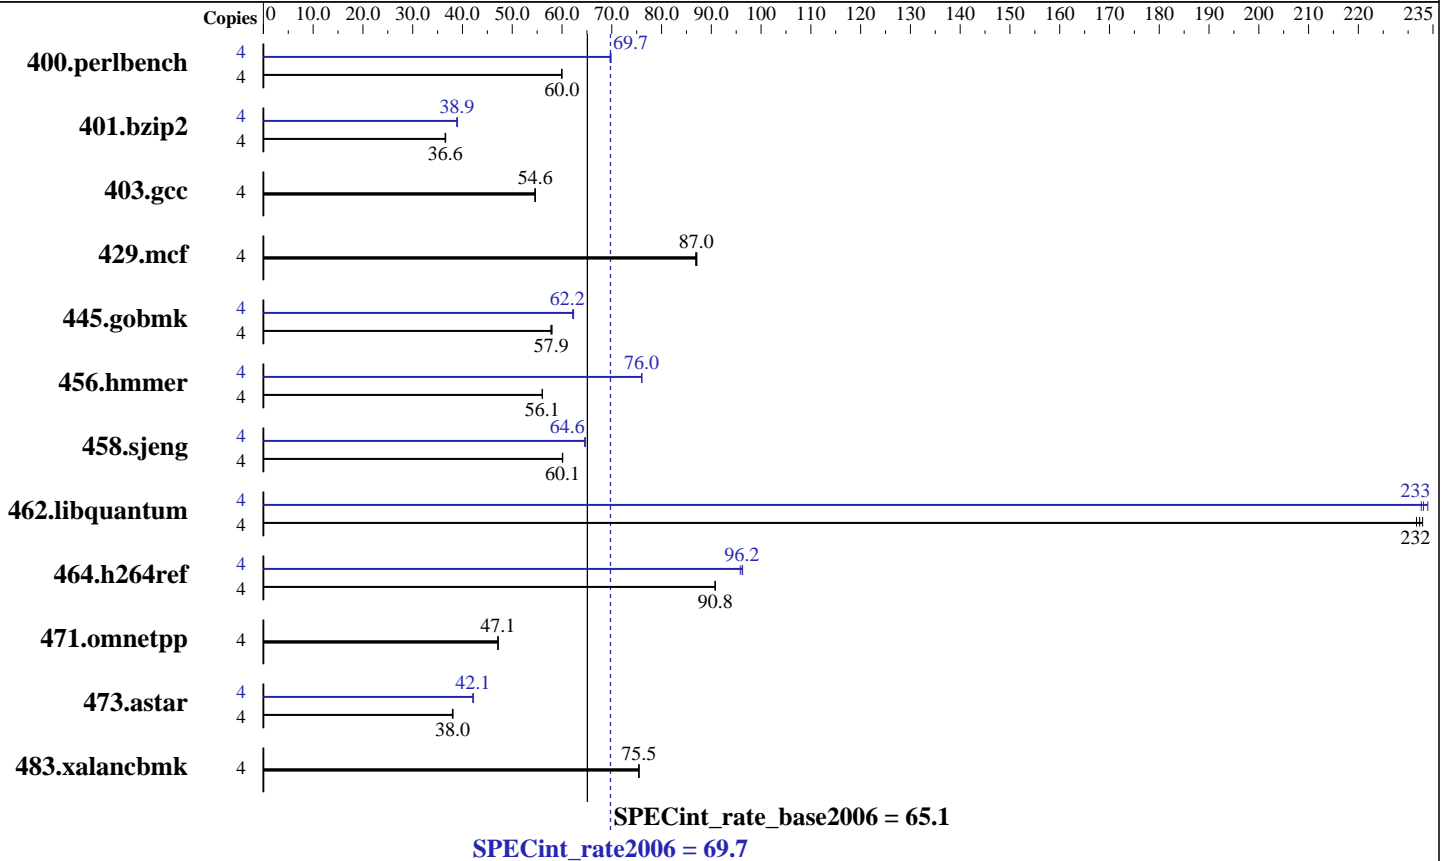

### Hardware

CPU Name: Intel Xeon E5504  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6x4 GB PC3-8500R, 2 rank, CL7-7-7, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 69.7

PRIMERGY RX200 S5, Intel Xeon E5504, 2.0 GHz

SPECint\_rate\_base2006 = 65.1

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b><u>651</u></b>	<b><u>60.0</u></b>	651	60.0	652	59.9	4	561	69.7	<b><u>560</u></b>	<b><u>69.7</u></b>	559	69.9
401.bzip2	4	1057	36.5	<b><u>1056</u></b>	<b><u>36.6</u></b>	1054	36.6	4	989	39.0	993	38.9	<b><u>992</u></b>	<b><u>38.9</u></b>
403.gcc	4	590	54.6	<b><u>590</u></b>	<b><u>54.6</u></b>	589	54.7	4	590	54.6	<b><u>590</u></b>	<b><u>54.6</u></b>	589	54.7
429.mcf	4	<b><u>419</u></b>	<b><u>87.0</u></b>	420	86.9	419	87.1	4	<b><u>419</u></b>	<b><u>87.0</u></b>	420	86.9	419	87.1
445.gobmk	4	723	58.0	726	57.8	<b><u>725</u></b>	<b><u>57.9</u></b>	4	675	62.2	<b><u>675</u></b>	<b><u>62.2</u></b>	673	62.3
456.hammer	4	<b><u>666</u></b>	<b><u>56.1</u></b>	666	56.1	666	56.0	4	<b><u>491</u></b>	<b><u>76.0</u></b>	491	76.0	491	76.0
458.sjeng	4	806	60.1	805	60.1	<b><u>805</u></b>	<b><u>60.1</u></b>	4	749	64.6	<b><u>749</u></b>	<b><u>64.6</u></b>	749	64.6
462.libquantum	4	358	232	356	233	<b><u>357</u></b>	<b><u>232</u></b>	4	356	233	354	234	<b><u>356</u></b>	<b><u>233</u></b>
464.h264ref	4	975	90.8	<b><u>975</u></b>	<b><u>90.8</u></b>	975	90.8	4	924	95.8	919	96.3	<b><u>920</u></b>	<b><u>96.2</u></b>
471.omnetpp	4	<b><u>530</u></b>	<b><u>47.1</u></b>	530	47.2	531	47.1	4	<b><u>530</u></b>	<b><u>47.1</u></b>	530	47.2	531	47.1
473.astar	4	740	38.0	<b><u>739</u></b>	<b><u>38.0</u></b>	737	38.1	4	667	42.1	666	42.2	<b><u>666</u></b>	<b><u>42.1</u></b>
483.xalancbmk	4	366	75.4	<b><u>366</u></b>	<b><u>75.5</u></b>	366	75.5	4	366	75.4	<b><u>366</u></b>	<b><u>75.5</u></b>	366	75.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 800 MHz.

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 69.7**

PRIMERGY RX200 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_rate\_base2006 = 65.1**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Base Portability Flags (Continued)

483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 69.7

PRIMERGY RX200 S5, Intel Xeon E5504, 2.0 GHz

SPECint\_rate\_base2006 = 65.1

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Peak Portability Flags (Continued)

473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 69.7**

PRIMERGY RX200 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_rate\_base2006 = 65.1**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 04:41:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 October 2009.