



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E2
(Intel Xeon E5540, 2.53 GHz)

SPECint[®]_rate2006 = 111

SPECint_rate_base2006 = 104

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

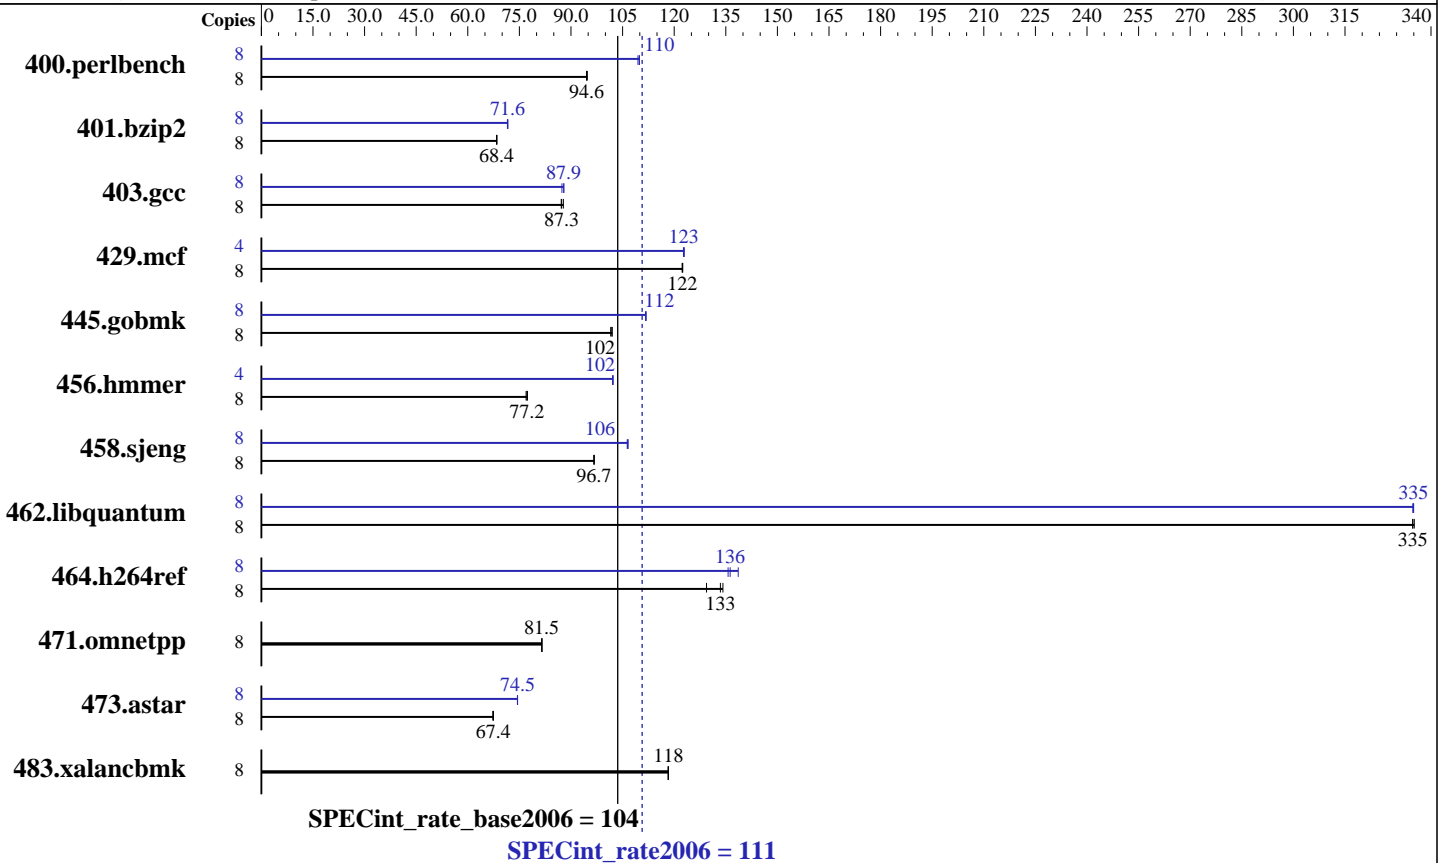

Hardware

CPU Name: Intel Xeon E5540
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 X 4 GB PC3-8500R, 2 rank, CL7, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E2
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 111

SPECint_rate_base2006 = 104

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	827	94.5	<u>826</u>	<u>94.6</u>	825	94.7	8	714	109	<u>712</u>	<u>110</u>	711	110
401.bzip2	8	1128	68.5	1129	68.4	<u>1129</u>	<u>68.4</u>	8	1077	71.7	<u>1079</u>	<u>71.6</u>	1079	71.5
403.gcc	8	734	87.8	<u>738</u>	<u>87.3</u>	739	87.2	8	<u>733</u>	<u>87.9</u>	733	87.9	737	87.4
429.mcf	8	596	122	<u>596</u>	<u>122</u>	597	122	4	297	123	<u>297</u>	<u>123</u>	297	123
445.gobmk	8	823	102	<u>824</u>	<u>102</u>	827	102	8	751	112	<u>751</u>	<u>112</u>	750	112
456.hammer	8	<u>967</u>	<u>77.2</u>	970	76.9	965	77.4	4	365	102	365	102	<u>365</u>	<u>102</u>
458.sjeng	8	1000	96.8	1001	96.7	<u>1001</u>	<u>96.7</u>	8	<u>909</u>	<u>106</u>	908	107	910	106
462.libquantum	8	<u>495</u>	<u>335</u>	495	335	495	335	8	495	335	495	335	<u>495</u>	<u>335</u>
464.h264ref	8	<u>1327</u>	<u>133</u>	1368	129	1320	134	8	1277	139	1305	136	<u>1299</u>	<u>136</u>
471.omnetpp	8	613	81.6	<u>613</u>	<u>81.5</u>	613	81.5	8	613	81.6	<u>613</u>	<u>81.5</u>	613	81.5
473.astar	8	<u>833</u>	<u>67.4</u>	832	67.5	834	67.3	8	<u>754</u>	<u>74.5</u>	755	74.4	754	74.5
483.xalancbmk	8	<u>467</u>	<u>118</u>	467	118	466	118	8	<u>467</u>	<u>118</u>	467	118	466	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings were used.

General Notes

The NEC Express5800/R120a-1(Intel Xeon E5540),
the NEC Express5800/R120a-2(Intel Xeon E5540),
the Bull NovaScale R440 E2 (Intel Xeon E5540, 2.53 GHz) and
the Bull NovaScale R460 E2 (Intel Xeon E5540, 2.53 GHz) models are electronically equivalent.
The results have been measured on a NEC Express5800/R120a-1(Intel Xeon E5540) model.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E2
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 111

SPECint_rate_base2006 = 104

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc
456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc

C++ benchmarks (except as noted below):
icpc

473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E2
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 111

SPECint_rate_base2006 = 104

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E2
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 111

SPECint_rate_base2006 = 104

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
          -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:22:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 October 2009.