



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120a-1  
(Intel Xeon E5530)

SPECint<sup>®</sup>\_rate2006 = 107

SPECint\_rate\_base2006 = 100

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

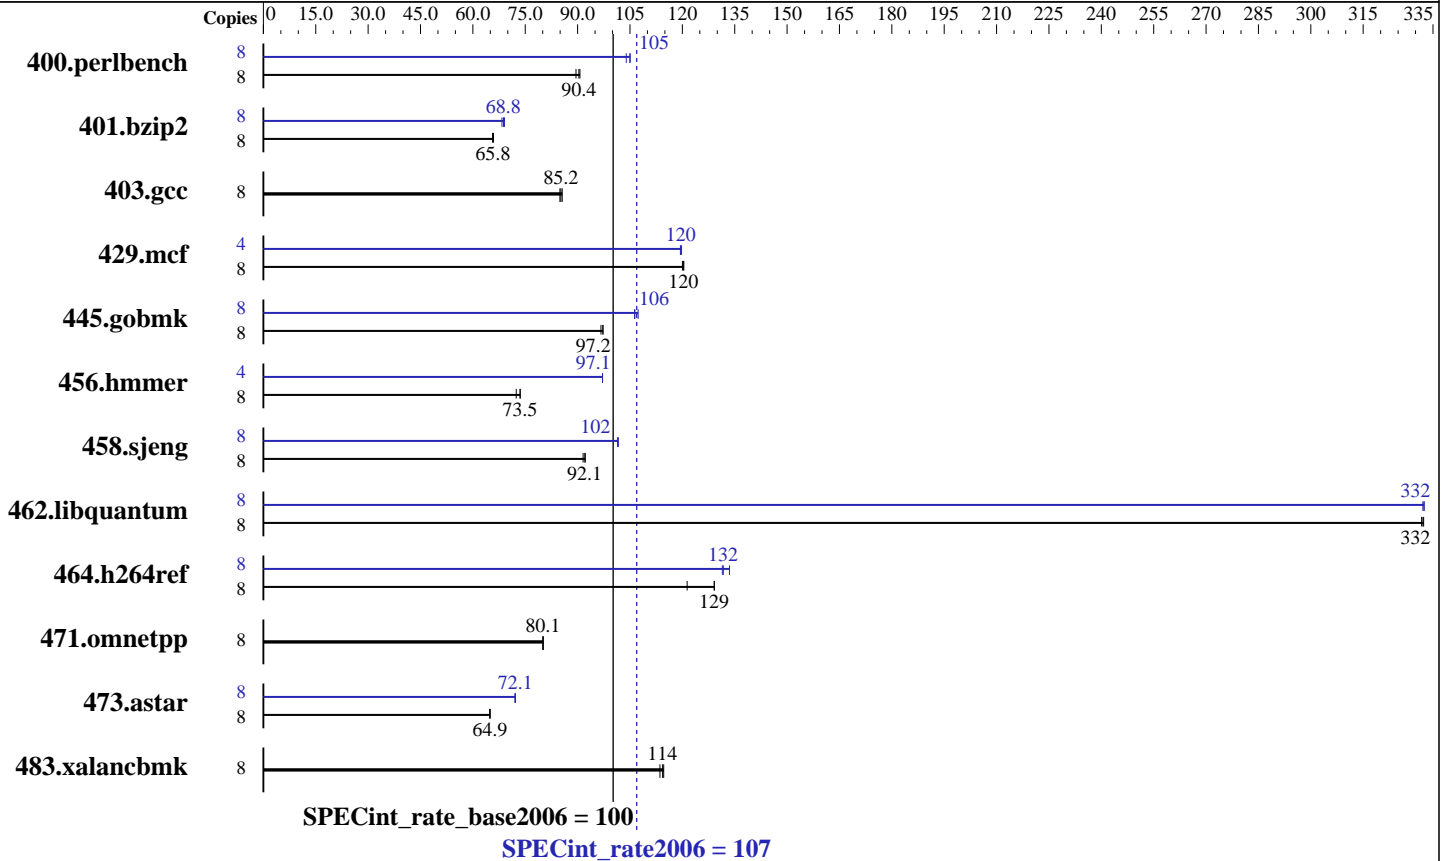

### Hardware

CPU Name: Intel Xeon E5530  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 X 4 GB PC3-8500R, 2 rank, CL7, ECC)  
 Disk Subsystem: 1x146.5 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.081  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120a-1  
(Intel Xeon E5530)

SPECint\_rate2006 = 107

SPECint\_rate\_base2006 = 100

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>865</b>	<b>90.4</b>	862	90.7	873	89.5	8	752	104	744	105	<b>745</b>	<b>105</b>
401.bzip2	8	1172	65.9	<b>1174</b>	<b>65.8</b>	1176	65.7	8	1118	69.1	<b>1123</b>	<b>68.8</b>	1130	68.3
403.gcc	8	752	85.6	<b>756</b>	<b>85.2</b>	758	84.9	8	752	85.6	<b>756</b>	<b>85.2</b>	758	84.9
429.mcf	8	<b>606</b>	<b>120</b>	606	120	608	120	4	305	119	305	120	<b>305</b>	<b>120</b>
445.gobmk	8	868	96.7	863	97.3	<b>863</b>	<b>97.2</b>	8	<b>789</b>	<b>106</b>	789	106	782	107
456.hammer	8	1015	73.6	<b>1015</b>	<b>73.5</b>	1031	72.4	4	384	97.1	<b>384</b>	<b>97.1</b>	384	97.1
458.sjeng	8	1057	91.6	1050	92.2	<b>1051</b>	<b>92.1</b>	8	954	101	<b>953</b>	<b>102</b>	953	102
462.libquantum	8	500	332	<b>499</b>	<b>332</b>	499	332	8	499	332	499	332	<b>499</b>	<b>332</b>
464.h264ref	8	1371	129	<b>1371</b>	<b>129</b>	1459	121	8	1347	131	1326	134	<b>1344</b>	<b>132</b>
471.omnetpp	8	624	80.1	624	80.1	<b>624</b>	<b>80.1</b>	8	624	80.1	624	80.1	<b>624</b>	<b>80.1</b>
473.astar	8	865	64.9	866	64.8	<b>865</b>	<b>64.9</b>	8	778	72.2	<b>779</b>	<b>72.1</b>	779	72.1
483.xalancbmk	8	<b>483</b>	<b>114</b>	481	115	486	114	8	<b>483</b>	<b>114</b>	481	115	486	114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

Default BIOS settings were used.

## General Notes

The NEC Express5800/R120a-1(Intel Xeon E5530),  
the NEC Express5800/R120a-2(Intel Xeon E5530),  
the Bull NovaScale R440 E2 (Intel Xeon E5530, 2.40 GHz) and  
the Bull NovaScale R460 E2 (Intel Xeon E5530, 2.40 GHz) models are electronically equivalent.  
The results have been measured on a NEC Express5800/R120a-1(Intel Xeon E5530) model.

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 107

Express5800/R120a-1  
(Intel Xeon E5530)

SPECint\_rate\_base2006 = 100

CPU2006 license: 9006

Test date: May-2009

Test sponsor: NEC Corporation

Hardware Availability: Apr-2009

Tested by: NEC Corporation

Software Availability: Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc  
456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc  
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc

C++ benchmarks (except as noted below):  
icpc

473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 107**

Express5800/R120a-1  
(Intel Xeon E5530)

**SPECint\_rate\_base2006 = 100**

**CPU2006 license:** 9006

**Test date:** May-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
          -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
                -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

471.omnetpp: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120a-1  
(Intel Xeon E5530)

**SPECint\_rate2006 = 107**

**SPECint\_rate\_base2006 = 100**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
           -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:14:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 October 2009.