



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 36.4

PRIMERGY BX620 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate_base2006 = 35.1

CPU2006 license: 19


Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

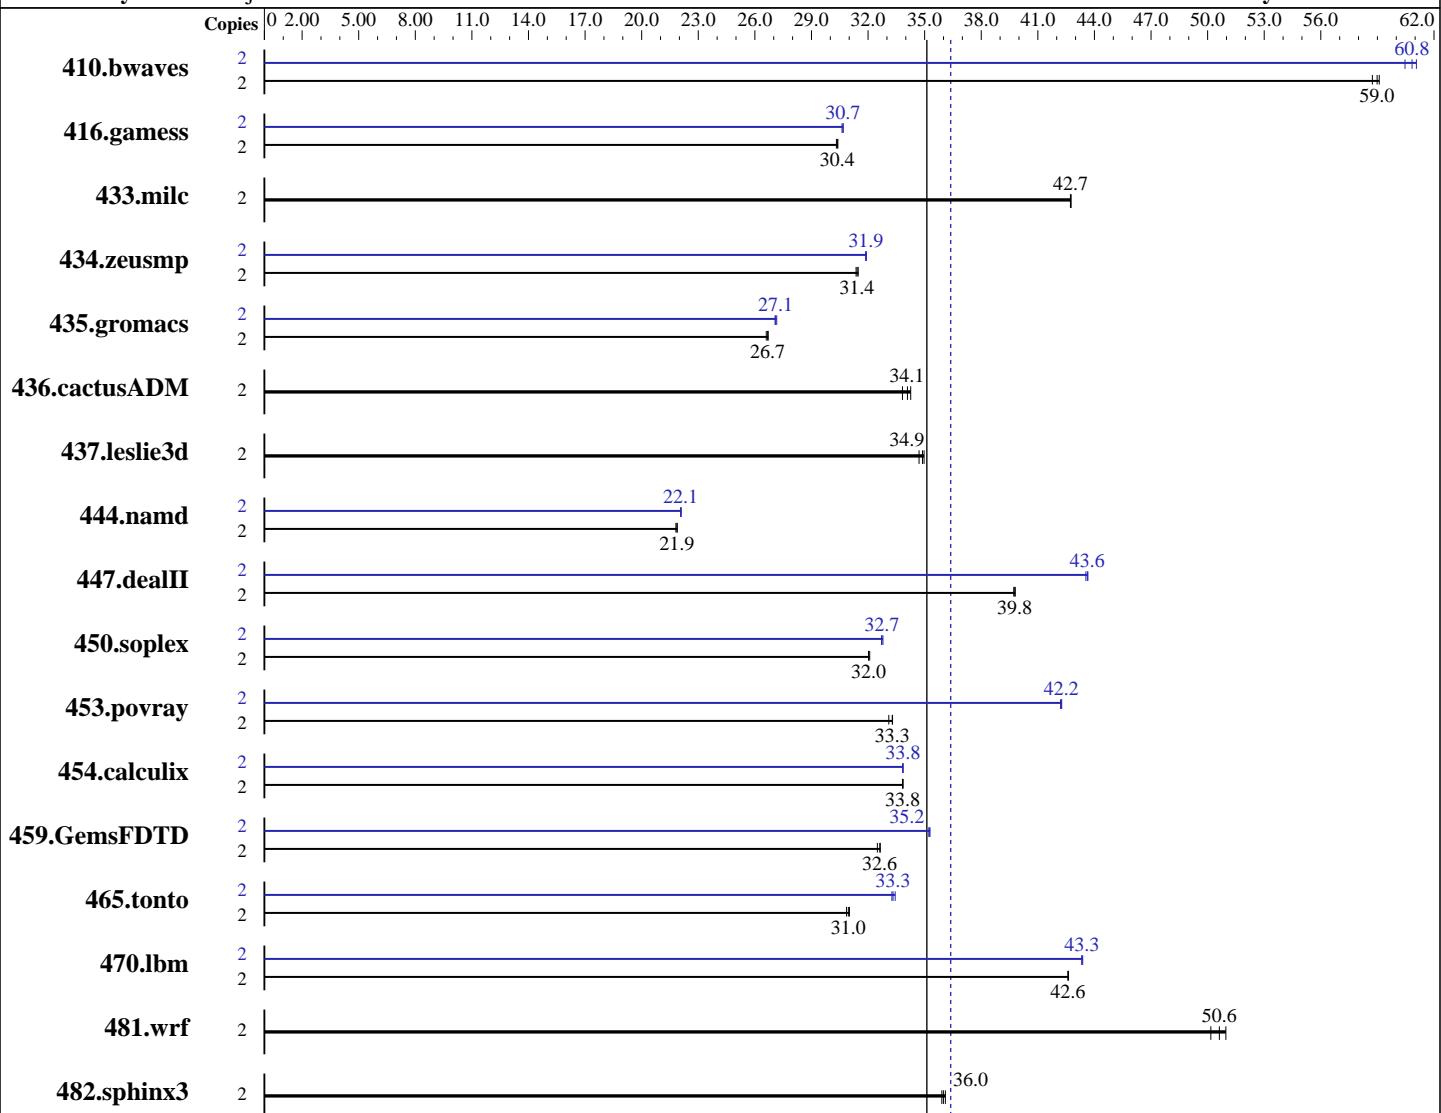

SPECfp_rate_base2006 = 35.1

SPECfp_rate2006 = 36.4

Hardware

CPU Name: Intel Xeon E5502
CPU Characteristics:
CPU MHz:
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel: No
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 36.4

PRIMERGY BX620 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate_base2006 = 35.1

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

L3 Cache:	4 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	Binutils 2.18.50.0.7.20080502
Memory:	24 GB (6x4 GB PC3-8500R, 2 rank, CL7-7-7, ECC, see add'l detail in notes)		
Disk Subsystem:	1 x SATA, 250 GB, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	460	59.1	461	59.0	463	58.7	2	450	60.5	447	60.8	445	61.1		
416.gamess	2	1291	30.3	1288	30.4	1289	30.4	2	1276	30.7	1277	30.7	1279	30.6		
433.milc	2	430	42.7	429	42.8	430	42.7	2	430	42.7	429	42.8	430	42.7		
434.zeusmp	2	580	31.4	579	31.4	578	31.5	2	570	31.9	571	31.9	571	31.9		
435.gromacs	2	535	26.7	537	26.6	535	26.7	2	528	27.1	526	27.2	527	27.1		
436.cactusADM	2	698	34.3	707	33.8	701	34.1	2	698	34.3	707	33.8	701	34.1		
437.leslie3d	2	538	35.0	539	34.9	542	34.7	2	538	35.0	539	34.9	542	34.7		
444.namd	2	733	21.9	735	21.8	733	21.9	2	727	22.1	727	22.1	726	22.1		
447.dealII	2	575	39.8	575	39.8	576	39.7	2	524	43.6	525	43.5	524	43.7		
450.soplex	2	521	32.0	520	32.1	521	32.0	2	509	32.8	510	32.7	510	32.7		
453.povray	2	320	33.3	321	33.1	320	33.3	2	252	42.2	252	42.3	252	42.2		
454.calculix	2	488	33.8	487	33.9	488	33.8	2	487	33.8	487	33.9	488	33.8		
459.GemsFDTD	2	653	32.5	650	32.6	650	32.6	2	602	35.2	601	35.3	602	35.2		
465.tonto	2	635	31.0	638	30.9	636	31.0	2	589	33.4	592	33.3	591	33.3		
470.lbm	2	645	42.6	645	42.6	645	42.6	2	634	43.3	633	43.4	634	43.3		
481.wrf	2	441	50.6	438	51.0	445	50.2	2	441	50.6	438	51.0	445	50.2		
482.sphinx3	2	1085	35.9	1080	36.1	1083	36.0	2	1085	35.9	1080	36.1	1083	36.0		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate2006 = 36.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate2006 = 36.4

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate2006 = 36.4

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

444.namd: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -auto-ilp32

447.dealII: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -ansi-alias -scalar-rep-

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -Ob0 -opt-prefetch

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xsse4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate2006 = 36.4

SPECfp_rate_base2006 = 35.1

CPU2006 license: 19

Test date: Aug-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090901.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:05:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 October 2009.