



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 71.2

PowerEdge R510 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 66.1

CPU2006 license: 55


Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Oct-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

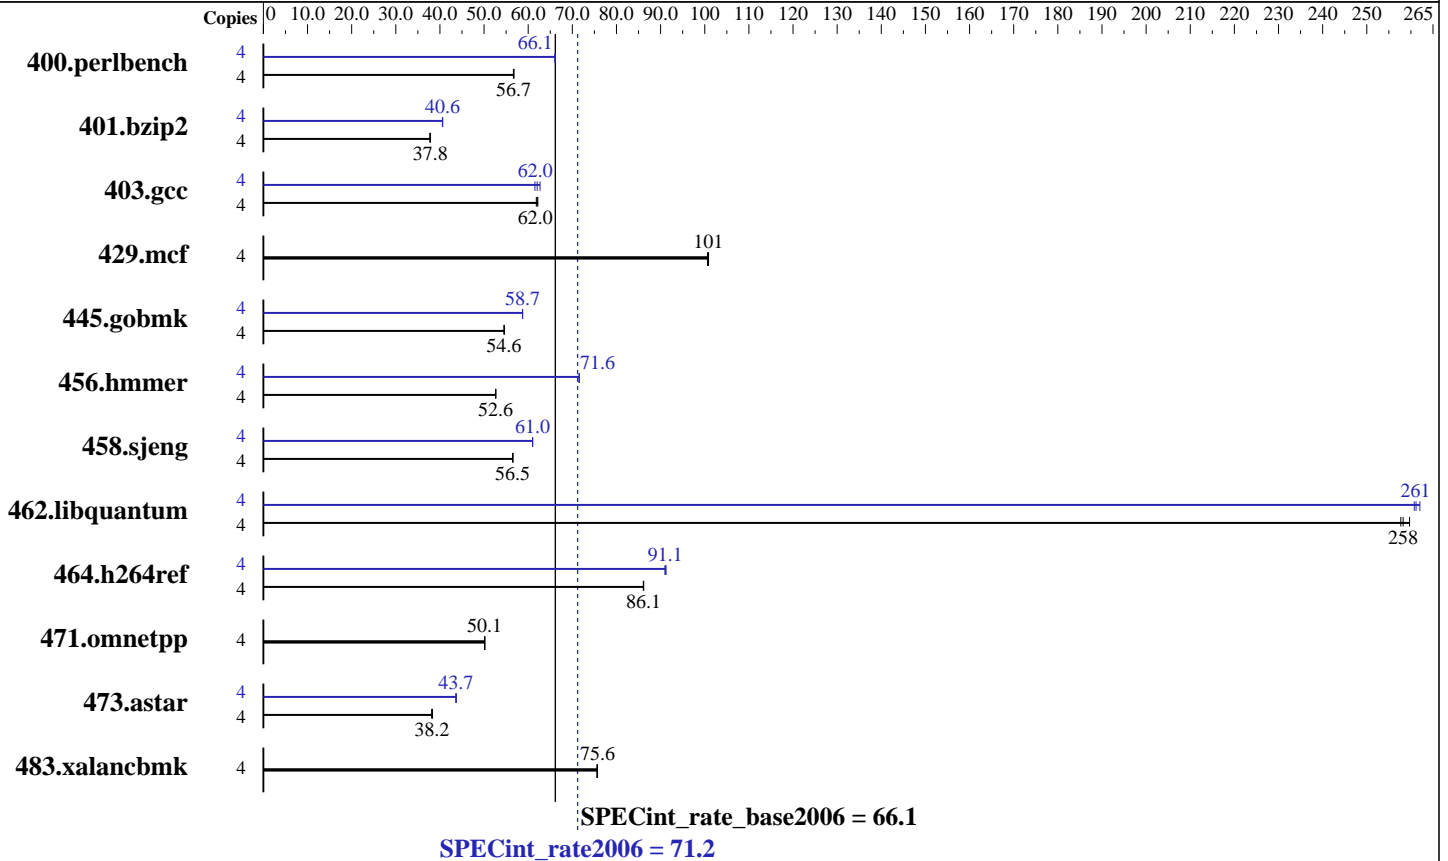

Hardware

CPU Name: Intel Xeon E5502
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM downclocked to 800 MHz)
 Disk Subsystem: 1 x 500 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 71.2

PowerEdge R510 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 66.1

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Oct-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	4	690	56.6	688	56.8	689	56.7	4	591	66.1	591	66.2	592	66.1		
401.bzip2	4	1023	37.7	1021	37.8	1020	37.8	4	951	40.6	952	40.6	950	40.6		
403.gcc	4	519	62.0	521	61.8	518	62.2	4	519	62.0	523	61.5	514	62.7		
429.mcf	4	362	101	362	101	363	101	4	362	101	362	101	363	101		
445.gobmk	4	769	54.5	769	54.6	769	54.6	4	715	58.7	714	58.7	715	58.7		
456.hammer	4	709	52.7	709	52.6	709	52.6	4	522	71.5	521	71.6	522	71.6		
458.sjeng	4	856	56.5	857	56.5	856	56.5	4	794	61.0	793	61.0	794	61.0		
462.libquantum	4	321	258	319	260	322	258	4	316	262	317	261	318	261		
464.h264ref	4	1027	86.2	1028	86.1	1028	86.1	4	970	91.2	972	91.1	973	91.0		
471.omnetpp	4	499	50.1	499	50.1	498	50.2	4	499	50.1	499	50.1	498	50.2		
473.astar	4	733	38.3	736	38.1	735	38.2	4	642	43.7	643	43.7	644	43.6		
483.xalancbmk	4	365	75.7	365	75.6	365	75.6	4	365	75.7	365	75.6	365	75.6		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 71.2

PowerEdge R510 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 66.1

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Oct-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 71.2

PowerEdge R510 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 66.1

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Oct-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 71.2

PowerEdge R510 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 66.1

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Oct-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090805.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090805.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:17:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 October 2009.