



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec


SPECint®_rate2006 = 69.2

Servidor Itautec MX223+ (Intel Xeon E5504)

SPECint_rate_base2006 = 64.8

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Oct-2009
Hardware Availability: Sep-2009
Software Availability: Feb-2009

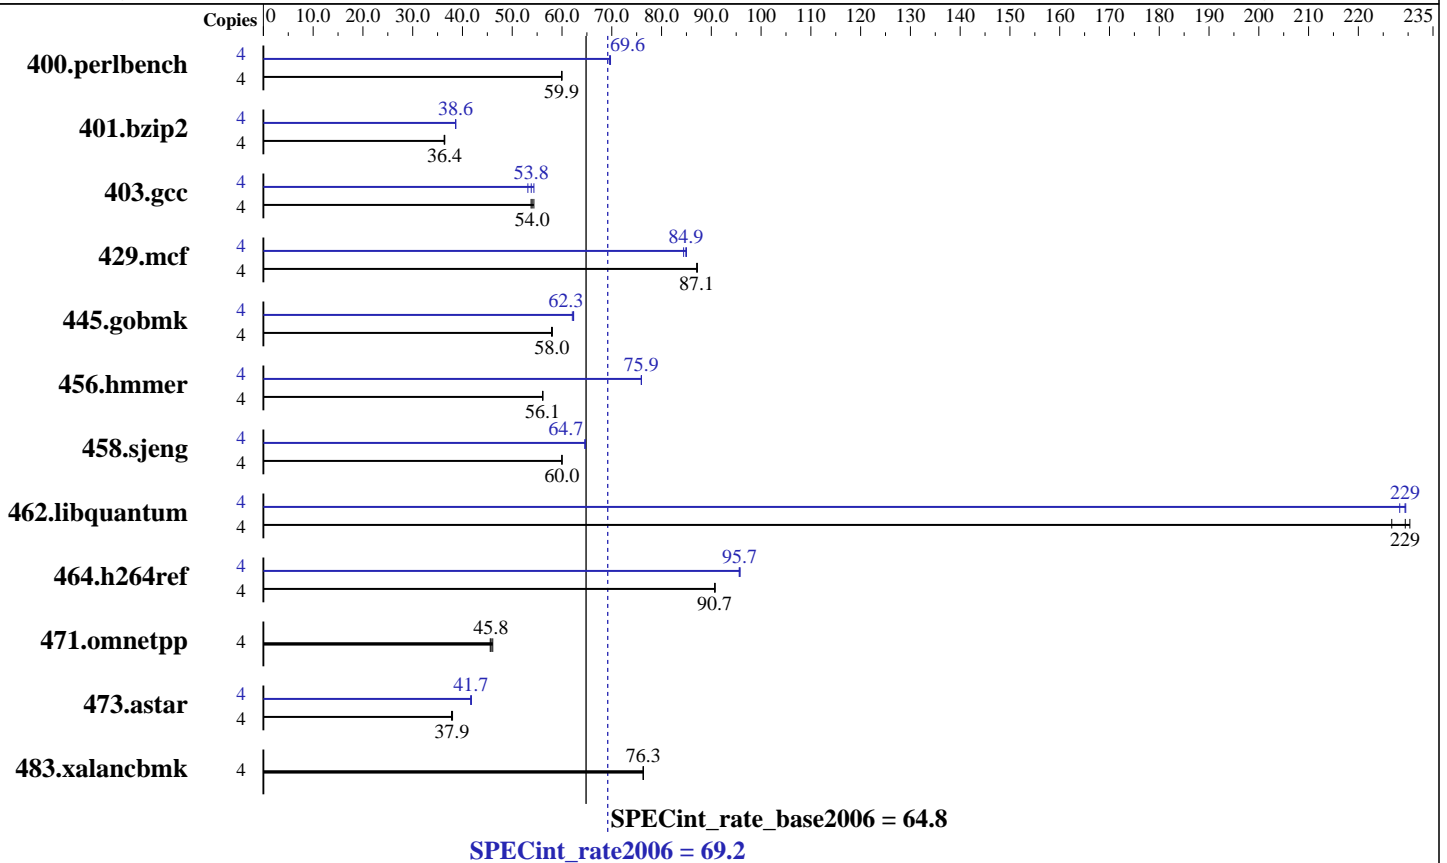

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 9 GB (9 x 1GB DDR3-1066, CL 7, ECC, running at 800MHz)
 Disk Subsystem: 1 x 160 GB SATA-2, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 69.2

Servidor Itaotec MX223+ (Intel Xeon E5504)

SPECint_rate_base2006 = 64.8

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Oct-2009
Hardware Availability: Sep-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	4	652	59.9	651	60.0	<u>652</u>	<u>59.9</u>	4	562	69.6	560	69.7	<u>561</u>	<u>69.6</u>		
401.bzip2	4	1060	36.4	<u>1060</u>	<u>36.4</u>	1063	36.3	4	998	38.7	<u>999</u>	<u>38.6</u>	1000	38.6		
403.gcc	4	592	54.3	599	53.8	<u>596</u>	<u>54.0</u>	4	592	54.4	606	53.1	<u>598</u>	<u>53.8</u>		
429.mcf	4	418	87.2	419	87.1	<u>419</u>	<u>87.1</u>	4	432	84.4	<u>430</u>	<u>84.9</u>	429	85.0		
445.gobmk	4	723	58.1	725	57.9	<u>724</u>	<u>58.0</u>	4	673	62.3	<u>673</u>	<u>62.3</u>	676	62.1		
456.hammer	4	665	56.2	<u>665</u>	<u>56.1</u>	665	56.1	4	<u>491</u>	<u>75.9</u>	491	75.9	491	76.0		
458.sjeng	4	<u>807</u>	<u>60.0</u>	806	60.0	807	59.9	4	748	64.7	749	64.6	<u>748</u>	<u>64.7</u>		
462.libquantum	4	360	230	<u>361</u>	<u>229</u>	366	227	4	363	228	361	230	<u>361</u>	<u>229</u>		
464.h264ref	4	976	90.7	<u>976</u>	<u>90.7</u>	975	90.8	4	926	95.6	<u>925</u>	<u>95.7</u>	924	95.8		
471.omnetpp	4	542	46.1	<u>546</u>	<u>45.8</u>	548	45.6	4	542	46.1	<u>546</u>	<u>45.8</u>	548	45.6		
473.astar	4	739	38.0	743	37.8	<u>741</u>	<u>37.9</u>	4	<u>673</u>	<u>41.7</u>	672	41.8	674	41.6		
483.xalanbmk	4	362	76.3	<u>362</u>	<u>76.3</u>	362	76.3	4	362	76.3	<u>362</u>	<u>76.3</u>	362	76.3		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

This result was measured on the Servidor Itaotec MX223+.
The Servidor Itaotec MX223+ and the Servidor Itaotec MX203+ are electronically equivalent.
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 69.2

Servidor Itaotec MX223+ (Intel Xeon E5504)

SPECint_rate_base2006 = 64.8

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Oct-2009
Hardware Availability: Sep-2009
Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/richard/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 69.2

Servidor Itaotec MX223+ (Intel Xeon E5504)

SPECint_rate_base2006 = 64.8

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Oct-2009
Hardware Availability: Sep-2009
Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs
-L/home/richard/sh/SmartHeap_8.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 69.2

Servidor Itautec MX223+ (Intel Xeon E5504)

SPECint_rate_base2006 = 64.8

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Oct-2009
Hardware Availability: Sep-2009
Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:52:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 November 2009.