



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp®_rate2006 = 116

Servidor Itautec MX223+ (Intel Xeon E5504)

SPECfp_rate_base2006 = 112

CPU2006 license: 9001


Test date: Oct-2009

Test sponsor: Itautec

Hardware Availability: Sep-2009

Tested by: Itautec

Software Availability: Feb-2009

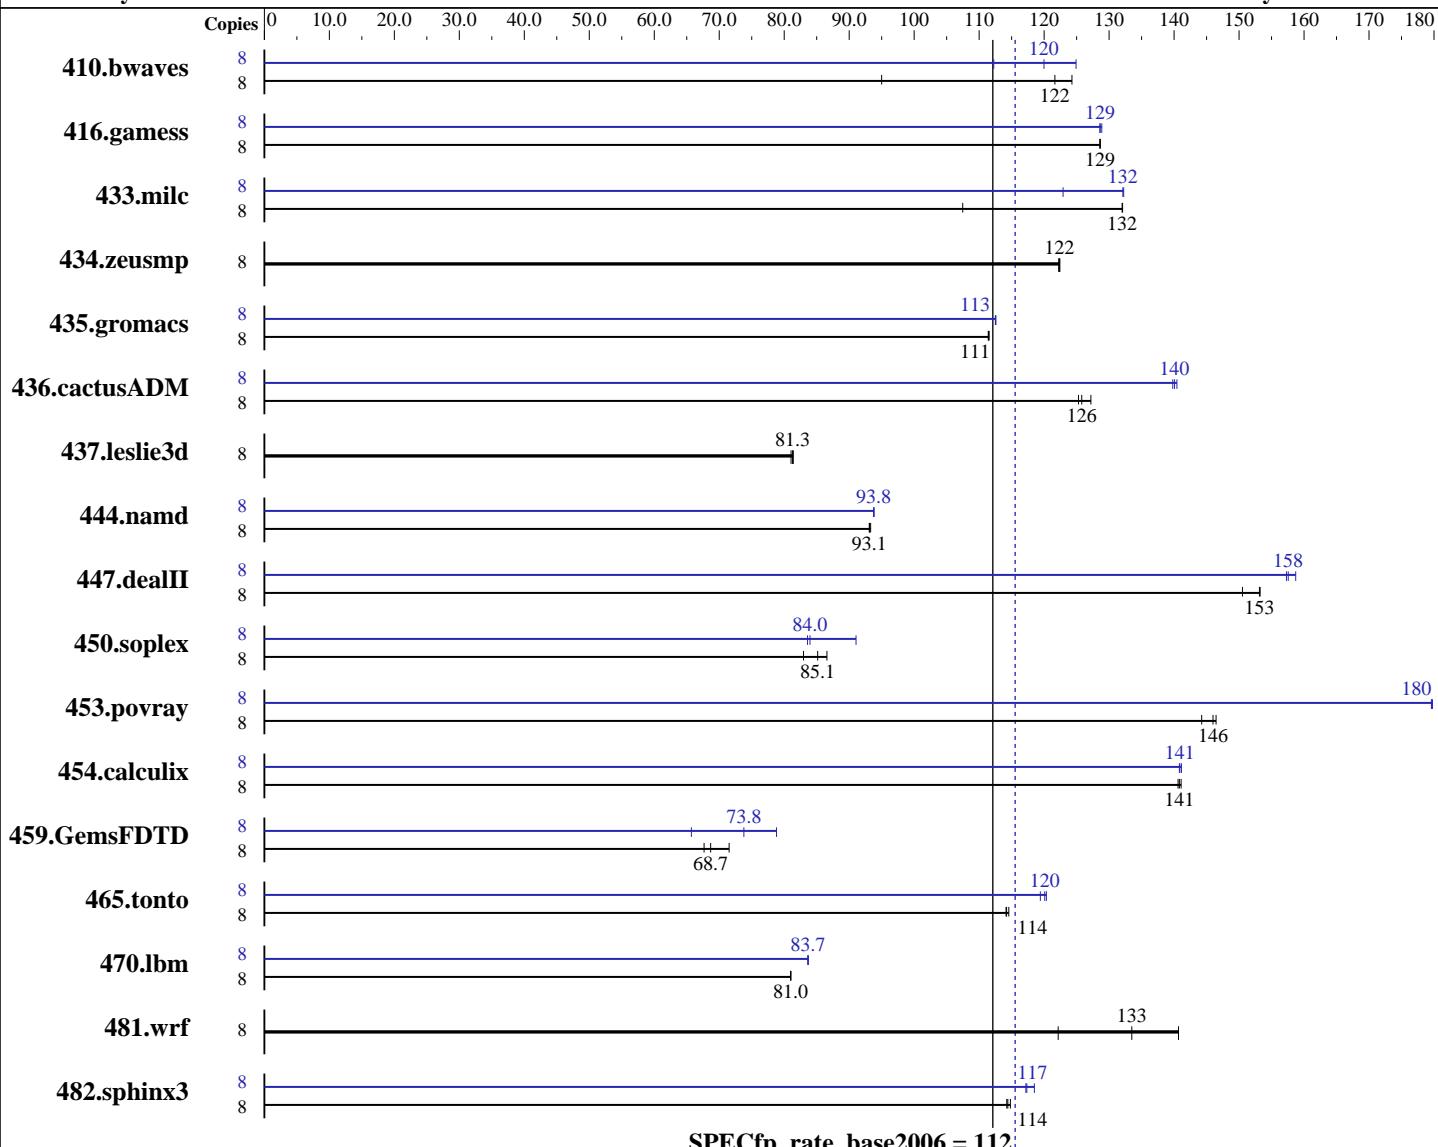

Hardware

CPU Name: Intel Xeon E5504
CPU Characteristics:
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1, 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64)
SP2 with patch Linux kernel 20090119,
Kernel 2.6.16.60-0.34-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
Build 20090131 Package ID: l_cproc_p_11.0.081
l_cprof_p_11.0.081
Auto Parallel: No
File System: ReiserFS
System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 116

Servidor Itautec MX223+ (Intel Xeon E5504)

SPECfp_rate_base2006 = 112

CPU2006 license: 9001

Test date: Oct-2009

Test sponsor: Itautec

Hardware Availability: Sep-2009

Tested by: Itautec

Software Availability: Feb-2009

L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6 x 2GB DDR3-1066, CL 7, ECC, running at 800 MHz)
Disk Subsystem:	1 x 160 GB SATA-2, 7200RPM
Other Hardware:	None

Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1144	95.0	875	124	<u>894</u>	<u>122</u>	8	969	112	<u>906</u>	<u>120</u>	870	125
416.gamess	8	1218	129	<u>1218</u>	<u>129</u>	1218	129	8	1218	129	<u>1218</u>	<u>129</u>	1215	129
433.milc	8	683	107	<u>556</u>	<u>132</u>	556	132	8	597	123	<u>556</u>	<u>132</u>	555	132
434.zeusmp	8	595	122	596	122	<u>595</u>	<u>122</u>	8	595	122	596	122	<u>595</u>	<u>122</u>
435.gromacs	8	<u>513</u>	<u>111</u>	512	112	513	111	8	508	113	507	113	<u>508</u>	<u>113</u>
436.cactusADM	8	763	125	<u>760</u>	<u>126</u>	752	127	8	684	140	681	140	<u>683</u>	<u>140</u>
437.leslie3d	8	<u>925</u>	<u>81.3</u>	924	81.4	928	81.1	8	<u>925</u>	<u>81.3</u>	924	81.4	928	81.1
444.namd	8	689	93.1	<u>689</u>	<u>93.1</u>	688	93.3	8	<u>684</u>	<u>93.8</u>	684	93.8	684	93.8
447.dealII	8	608	151	<u>598</u>	<u>153</u>	597	153	8	577	159	<u>581</u>	<u>158</u>	582	157
450.soplex	8	804	83.0	<u>784</u>	<u>85.1</u>	771	86.6	8	<u>795</u>	<u>84.0</u>	798	83.6	733	91.1
453.povray	8	291	146	<u>292</u>	<u>146</u>	295	144	8	237	180	<u>237</u>	<u>180</u>	237	180
454.calculix	8	469	141	<u>469</u>	<u>141</u>	468	141	8	468	141	<u>468</u>	<u>141</u>	469	141
459.GemsFDTD	8	1254	67.7	<u>1236</u>	<u>68.7</u>	1187	71.5	8	1292	65.7	<u>1150</u>	<u>73.8</u>	1077	78.8
465.tonto	8	687	115	690	114	<u>689</u>	<u>114</u>	8	654	120	<u>655</u>	<u>120</u>	659	119
470.lbm	8	1357	81.0	<u>1357</u>	<u>81.0</u>	1357	81.0	8	1313	83.7	<u>1314</u>	<u>83.7</u>	1314	83.6
481.wrf	8	731	122	<u>669</u>	<u>133</u>	635	141	8	731	122	<u>669</u>	<u>133</u>	635	141
482.sphinx3	8	<u>1363</u>	<u>114</u>	1365	114	1358	115	8	<u>1329</u>	<u>117</u>	1331	117	1316	119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

This result was measured on the Servidor Itautec MX223+.
The Servidor Itautec MX223+ and the Servidor Itautec MX203+ are electronically equivalent.
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX223+ (Intel Xeon E5504)

SPECfp_rate2006 = 116

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

Test date: Oct-2009

Hardware Availability: Sep-2009

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX223+ (Intel Xeon E5504)

SPECfp_rate2006 = 116

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

Test date: Oct-2009

Hardware Availability: Sep-2009

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX223+ (Intel Xeon E5504)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 112

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Oct-2009

Hardware Availability: Sep-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX223+ (Intel Xeon E5504)

SPECfp_rate2006 = 116

CPU2006 license: 9001

Test date: Oct-2009

Test sponsor: Itautec

Hardware Availability: Sep-2009

Tested by: Itautec

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-fp-linux64-revI.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-fp-linux64-revI.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:52:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 November 2009.