



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp®_rate2006 = 102

Servidor Itaotec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Nov-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

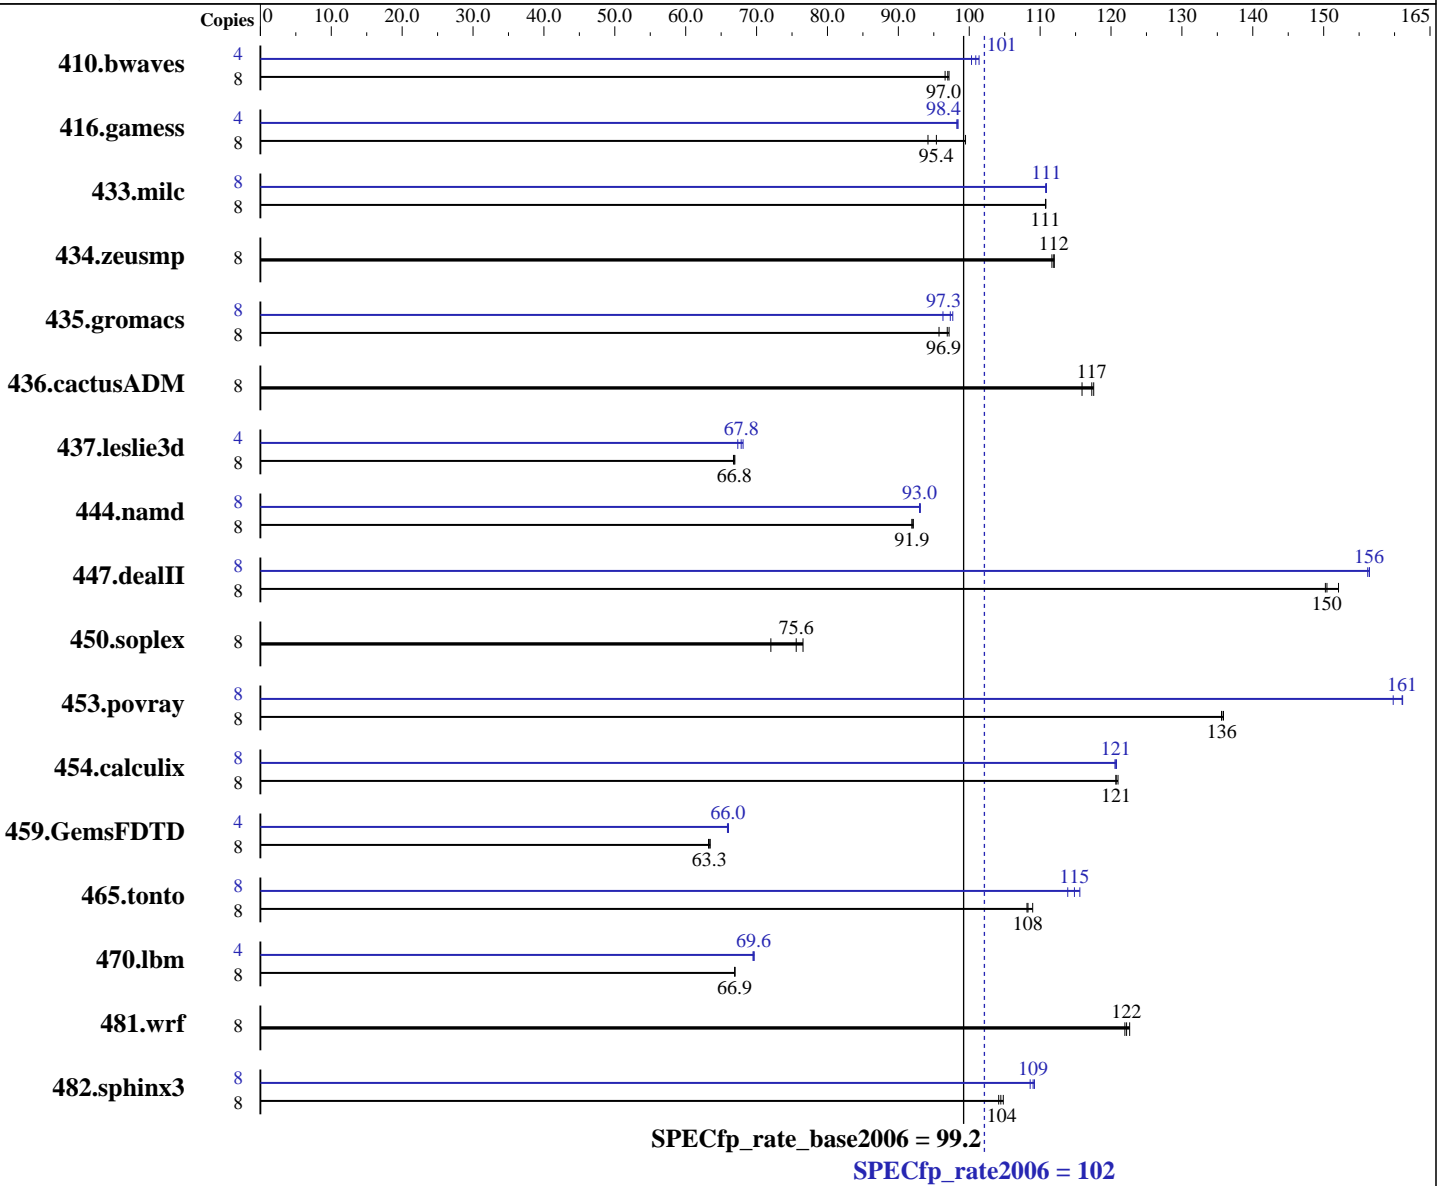

Hardware

CPU Name: Intel Xeon X5560
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081, l_cprof_p_11.0.081
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 102

Servidor Itautec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 9001

Test date: Nov-2009

Test sponsor: Itautec

Hardware Availability: Mar-2009

Tested by: Itautec

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (3 x 4GB DDR3-1333, CL 9, ECC)
Disk Subsystem: 1 x 160 GB SATA-2, 7200RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1126	96.6	1119	97.1	<u>1121</u>	<u>97.0</u>	4	542	100	536	101	<u>539</u>	<u>101</u>
416.gamess	8	1663	94.2	<u>1643</u>	<u>95.4</u>	1575	99.5	4	796	98.4	797	98.2	<u>796</u>	<u>98.4</u>
433.milc	8	663	111	<u>663</u>	<u>111</u>	663	111	8	662	111	663	111	<u>662</u>	<u>111</u>
434.zeusmp	8	<u>650</u>	<u>112</u>	650	112	652	112	8	<u>650</u>	<u>112</u>	650	112	652	112
435.gromacs	8	588	97.2	597	95.7	<u>589</u>	<u>96.9</u>	8	585	97.7	<u>587</u>	<u>97.3</u>	593	96.3
436.cactusADM	8	<u>815</u>	<u>117</u>	813	118	825	116	8	<u>815</u>	<u>117</u>	813	118	825	116
437.leslie3d	8	1127	66.7	1123	66.9	<u>1125</u>	<u>66.8</u>	4	558	67.3	552	68.1	<u>554</u>	<u>67.8</u>
444.namd	8	698	91.9	<u>698</u>	<u>91.9</u>	696	92.1	8	689	93.1	690	93.0	<u>690</u>	<u>93.0</u>
447.dealII	8	609	150	602	152	<u>608</u>	<u>150</u>	8	585	156	<u>585</u>	<u>156</u>	586	156
450.soplex	8	926	72.0	<u>883</u>	<u>75.6</u>	872	76.6	8	926	72.0	<u>883</u>	<u>75.6</u>	872	76.6
453.povray	8	<u>314</u>	<u>136</u>	314	136	313	136	8	266	160	264	161	<u>264</u>	<u>161</u>
454.calculix	8	546	121	<u>547</u>	<u>121</u>	547	121	8	546	121	547	121	<u>547</u>	<u>121</u>
459.GemsFDTD	8	1343	63.2	1337	63.5	<u>1340</u>	<u>63.3</u>	4	643	66.0	<u>643</u>	<u>66.0</u>	644	65.9
465.tonto	8	<u>727</u>	<u>108</u>	728	108	723	109	8	691	114	681	116	<u>685</u>	<u>115</u>
470.lbm	8	1642	66.9	1642	66.9	<u>1642</u>	<u>66.9</u>	4	791	69.5	<u>790</u>	<u>69.6</u>	789	69.7
481.wrf	8	729	123	733	122	<u>731</u>	<u>122</u>	8	729	123	733	122	<u>731</u>	<u>122</u>
482.sphinx3	8	1497	104	1488	105	<u>1493</u>	<u>104</u>	8	1436	109	<u>1430</u>	<u>109</u>	1428	109

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

This result was measured on the Servidor Itautec MX223.
The Servidor Itautec MX223 and the Servidor Itautec MX203 are electronically equivalent.
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 102

Servidor Itautec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Nov-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 102

Servidor Itaotec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Nov-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks:

icpc

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 102

Servidor Itaotec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Nov-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 102

Servidor Itautec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Nov-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-fp-linux64-revI.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-fp-linux64-revI.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:53:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.