




SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

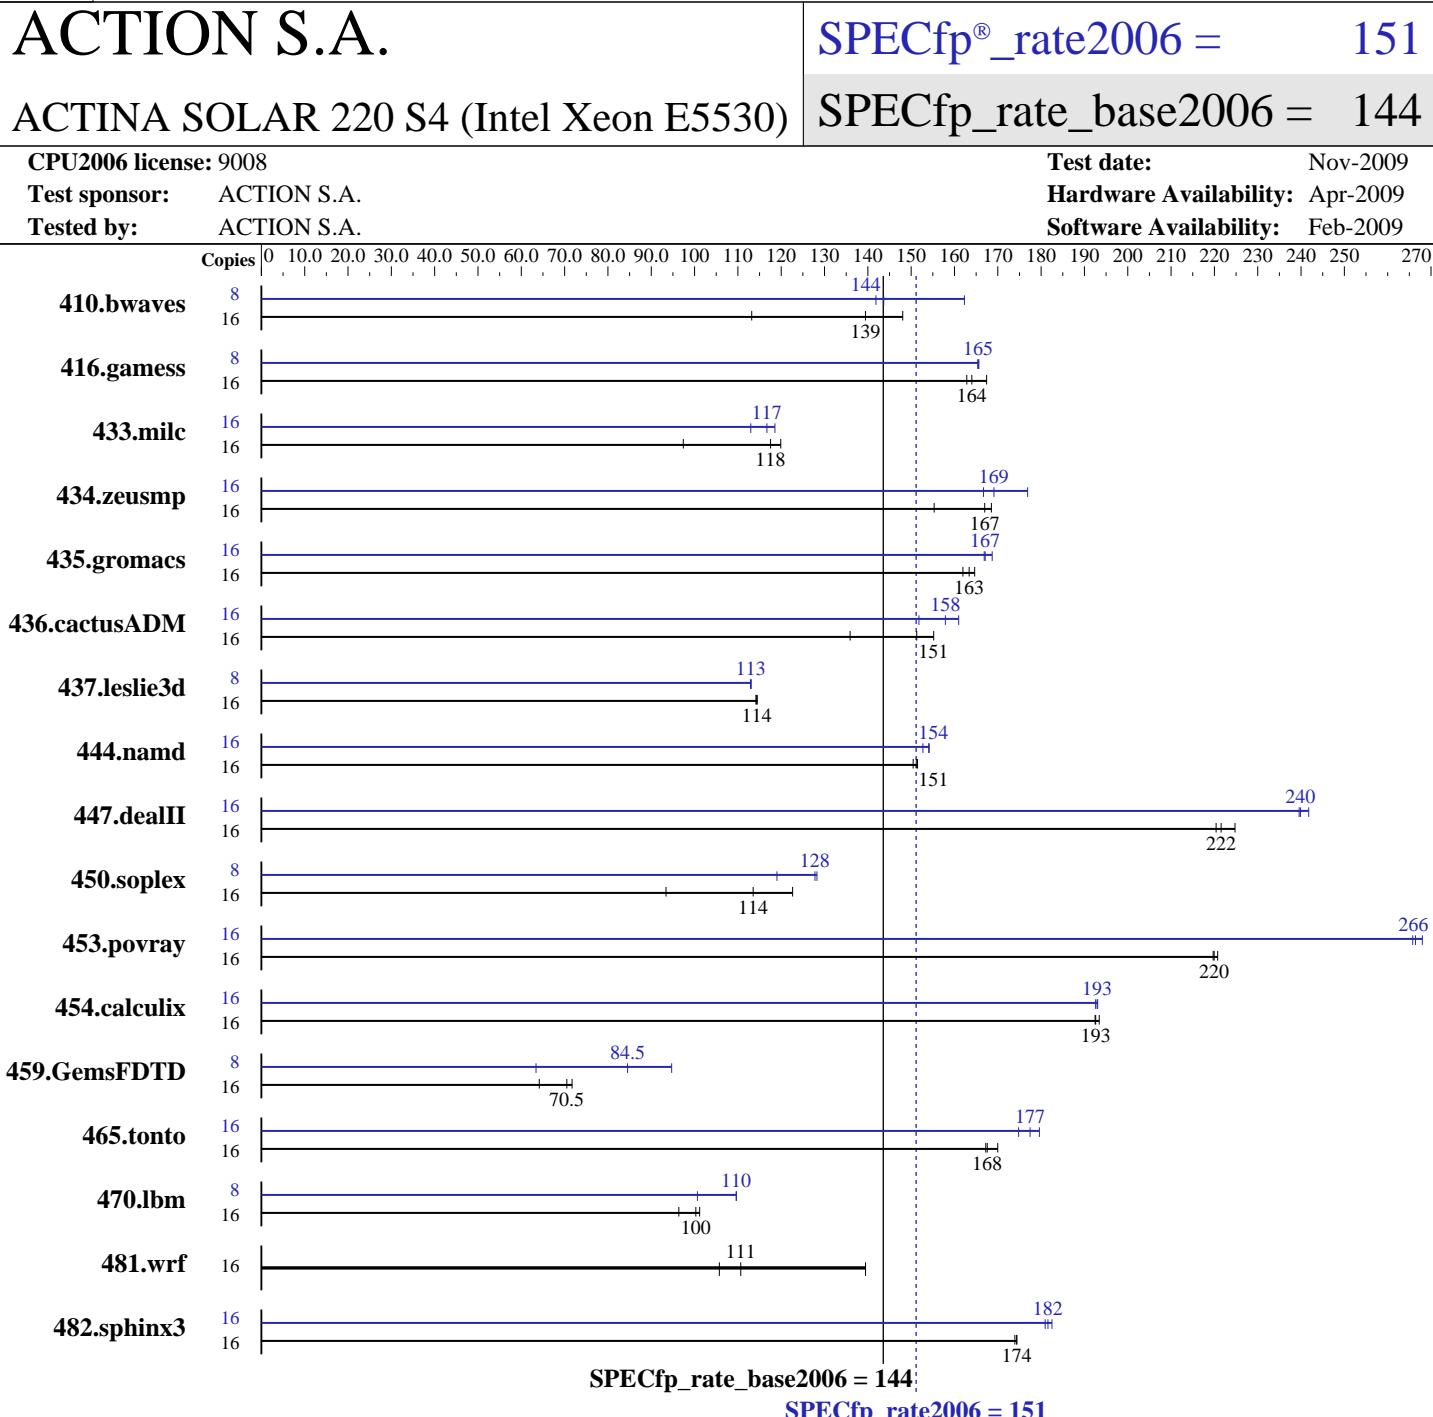

Hardware		Software	
CPU Name:	Intel Xeon E5530	Operating System:	SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
CPU Characteristics:	Intel Turbo Boost Technology up to 2.66 GHz	Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_fproc_p_11.0.066
CPU MHz:	2400	Auto Parallel:	No
FPU:	Integrated	File System:	ReiserFS
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Continued on next page	
Secondary Cache:	256 KB I+D on chip per core	Continued on next page	

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 = 151
ACTINA SOLAR 220 S4 (Intel Xeon E5530)	SPECfp_rate_base2006 = 144
CPU2006 license: 9008	Test date: Nov-2009
Test sponsor: ACTION S.A.	Hardware Availability: Apr-2009
Tested by: ACTION S.A.	Software Availability: Feb-2009
L3 Cache: 8 MB I+D on chip per chip	Peak Pointers: 32/64-bit
Other Cache: None	Other Software: Binutils 2.18.50.0.7.20080502
Memory: 24 GB (6 x 4 GB PC3-8500, 1066 MHz, DDR3, ECC)	
Disk Subsystem: 160 GB SATA, 7200 RPM	
Other Hardware: None	

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1921	113	<u>1559</u>	<u>139</u>	1469	148	8	670	162	766	142	<u>757</u>	<u>144</u>
416.gamess	16	1871	167	1924	163	<u>1910</u>	<u>164</u>	8	947	165	<u>946</u>	<u>165</u>	946	166
433.milc	16	1508	97.4	<u>1250</u>	<u>118</u>	1225	120	16	1239	119	<u>1259</u>	<u>117</u>	1300	113
434.zeusmp	16	937	155	<u>872</u>	<u>167</u>	864	169	16	823	177	873	167	<u>861</u>	<u>169</u>
435.gromacs	16	694	165	705	162	<u>699</u>	<u>163</u>	16	677	169	<u>684</u>	<u>167</u>	685	167
436.cactusADM	16	1407	136	<u>1264</u>	<u>151</u>	1232	155	16	1188	161	1260	152	<u>1211</u>	<u>158</u>
437.leslie3d	16	1318	114	1314	114	<u>1315</u>	<u>114</u>	8	665	113	<u>665</u>	<u>113</u>	666	113
444.namd	16	<u>849</u>	<u>151</u>	847	151	853	150	16	832	154	<u>833</u>	<u>154</u>	840	153
447.dealII	16	<u>826</u>	<u>222</u>	831	220	814	225	16	757	242	<u>763</u>	<u>240</u>	764	240
450.soplex	16	1429	93.4	<u>1175</u>	<u>114</u>	1088	123	8	561	119	<u>522</u>	<u>128</u>	520	128
453.povray	16	386	221	387	220	<u>387</u>	<u>220</u>	16	320	266	<u>319</u>	<u>266</u>	318	268
454.calculix	16	682	193	<u>685</u>	<u>193</u>	686	192	16	684	193	<u>684</u>	<u>193</u>	685	193
459.GemsFDTD	16	<u>2408</u>	<u>70.5</u>	2647	64.1	2367	71.7	8	1339	63.4	<u>1004</u>	<u>84.5</u>	896	94.7
465.tonto	16	<u>940</u>	<u>168</u>	942	167	926	170	16	877	180	<u>887</u>	<u>177</u>	901	175
470.lbm	16	2281	96.4	<u>2192</u>	<u>100</u>	2173	101	8	1092	101	1002	110	<u>1003</u>	<u>110</u>
481.wrf	16	1690	106	<u>1615</u>	<u>111</u>	1281	139	16	1690	106	<u>1615</u>	<u>111</u>	1281	139
482.sphinx3	16	1788	174	<u>1788</u>	<u>174</u>	1793	174	16	1724	181	1709	183	<u>1717</u>	<u>182</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 = 151
ACTINA SOLAR 220 S4 (Intel Xeon E5530)	SPECfp_rate_base2006 = 144
CPU2006 license: 9008	Test date: Nov-2009
Test sponsor: ACTION S.A.	Hardware Availability: Apr-2009
Tested by: ACTION S.A.	Software Availability: Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 =	151
ACTINA SOLAR 220 S4 (Intel Xeon E5530)	SPECfp_rate_base2006 =	144
CPU2006 license: 9008	Test date:	Nov-2009
Test sponsor: ACTION S.A.	Hardware Availability:	Apr-2009
Tested by: ACTION S.A.	Software Availability:	Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 =	151
ACTINA SOLAR 220 S4 (Intel Xeon E5530)	SPECfp_rate_base2006 =	144
CPU2006 license: 9008	Test date:	Nov-2009
Test sponsor: ACTION S.A.	Hardware Availability:	Apr-2009
Tested by: ACTION S.A.	Software Availability:	Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 151

ACTINA SOLAR 220 S4 (Intel Xeon E5530)

SPECfp_rate_base2006 = 144

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:55:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.