



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp®2006 = 40.0

PRIMERGY TX150 S7, Intel Xeon X3470, 2.93 GHz

SPECfp\_base2006 = 37.8

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Nov-2009

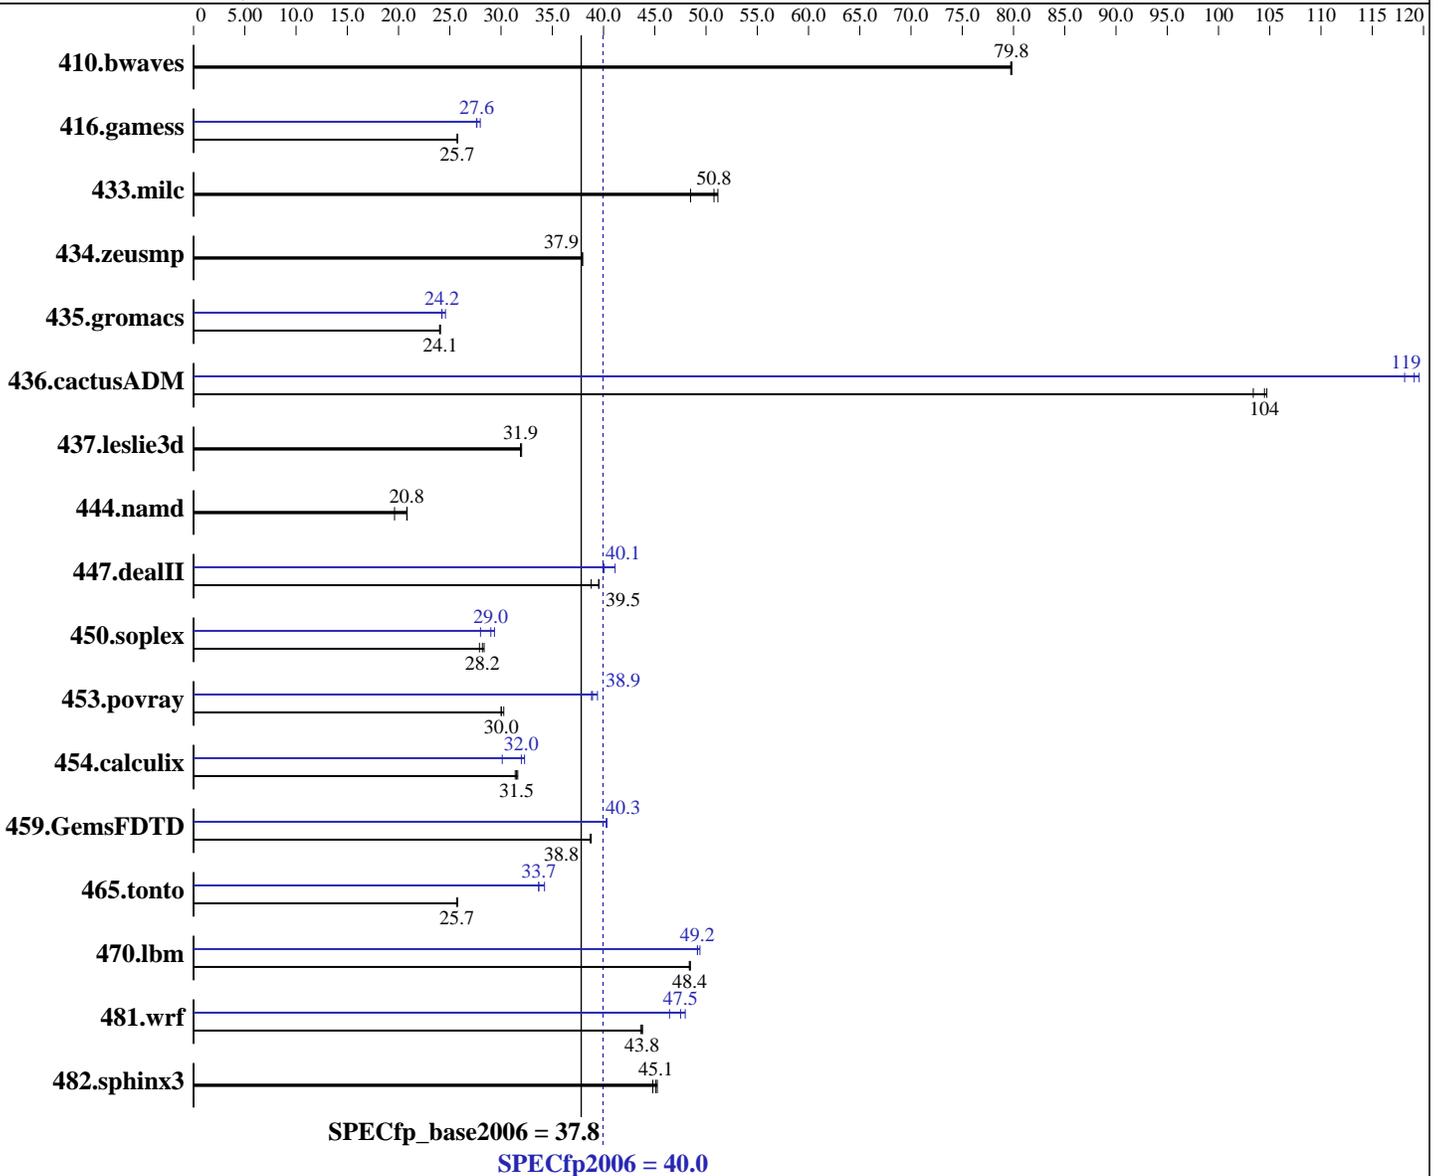

### Hardware

CPU Name: Intel Xeon X3470  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: l\_cproc\_p\_11.1.059, l\_cprof\_p\_11.1.059  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **40.0**

PRIMERGY TX150 S7, Intel Xeon X3470, 2.93 GHz

SPECfp\_base2006 = **37.8**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	170	79.7	170	79.8	<b><u>170</u></b>	<b><u>79.8</u></b>	170	79.7	170	79.8	<b><u>170</u></b>	<b><u>79.8</u></b>
416.gamess	761	25.7	761	25.7	<b><u>761</u></b>	<b><u>25.7</u></b>	700	28.0	709	27.6	<b><u>708</u></b>	<b><u>27.6</u></b>
433.milc	189	48.5	179	51.2	<b><u>181</u></b>	<b><u>50.8</u></b>	189	48.5	179	51.2	<b><u>181</u></b>	<b><u>50.8</u></b>
434.zeusmp	240	38.0	240	37.9	<b><u>240</u></b>	<b><u>37.9</u></b>	240	38.0	240	37.9	<b><u>240</u></b>	<b><u>37.9</u></b>
435.gromacs	297	24.1	297	24.0	<b><u>297</u></b>	<b><u>24.1</u></b>	<b><u>294</u></b>	<b><u>24.2</u></b>	291	24.6	295	24.2
436.cactusADM	114	105	116	103	<b><u>114</u></b>	<b><u>104</u></b>	101	118	<b><u>100</u></b>	<b><u>119</u></b>	99.9	120
437.leslie3d	<b><u>294</u></b>	<b><u>31.9</u></b>	295	31.9	294	32.0	<b><u>294</u></b>	<b><u>31.9</u></b>	295	31.9	294	32.0
444.namd	<b><u>386</u></b>	<b><u>20.8</u></b>	409	19.6	385	20.8	<b><u>386</u></b>	<b><u>20.8</u></b>	409	19.6	385	20.8
447.dealII	295	38.8	<b><u>289</u></b>	<b><u>39.5</u></b>	289	39.6	<b><u>286</u></b>	<b><u>39.9</u></b>	278	41.1	<b><u>286</u></b>	<b><u>40.1</u></b>
450.soplex	<b><u>296</u></b>	<b><u>28.2</u></b>	299	27.9	294	28.3	<b><u>288</u></b>	<b><u>29.0</u></b>	284	29.4	298	28.0
453.povray	176	30.3	<b><u>177</u></b>	<b><u>30.0</u></b>	177	30.0	135	39.4	137	38.8	<b><u>137</u></b>	<b><u>38.9</u></b>
454.calculix	261	31.6	<b><u>262</u></b>	<b><u>31.5</u></b>	263	31.4	274	30.1	<b><u>258</u></b>	<b><u>32.0</u></b>	255	32.3
459.GemsFDTD	273	38.8	274	38.7	<b><u>274</u></b>	<b><u>38.8</u></b>	263	40.3	<b><u>263</u></b>	<b><u>40.3</u></b>	263	40.3
465.tonto	<b><u>383</u></b>	<b><u>25.7</u></b>	383	25.7	382	25.7	287	34.2	<b><u>292</u></b>	<b><u>33.7</u></b>	292	33.7
470.lbm	283	48.5	<b><u>284</u></b>	<b><u>48.4</u></b>	284	48.4	278	49.4	<b><u>279</u></b>	<b><u>49.2</u></b>	279	49.2
481.wrf	<b><u>255</u></b>	<b><u>43.8</u></b>	255	43.8	256	43.6	<b><u>235</u></b>	<b><u>47.5</u></b>	241	46.4	233	48.0
482.sphinx3	431	45.2	435	44.8	<b><u>432</u></b>	<b><u>45.1</u></b>	431	45.2	435	44.8	<b><u>432</u></b>	<b><u>45.1</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M  
For information about Fujitsu please visit: <http://www.fujitsu.com>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 40.0**

PRIMERGY TX150 S7, Intel Xeon X3470, 2.93 GHz

**SPECfp\_base2006 = 37.8**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 40.0**

PRIMERGY TX150 S7, Intel Xeon X3470, 2.93 GHz

**SPECfp\_base2006 = 37.8**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 40.0**

PRIMERGY TX150 S7, Intel Xeon X3470, 2.93 GHz

**SPECfp\_base2006 = 37.8**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Nov-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp2006 = 40.0**

PRIMERGY TX150 S7, Intel Xeon X3470, 2.93 GHz

**SPECfp\_base2006 = 37.8**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Dec-2009

**Hardware Availability:** Jan-2010

**Software Availability:** Nov-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:17:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 January 2010.