



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon X5560, 2.80 GHz)

SPECfp®2006 = 39.4

SPECfp_base2006 = 37.1

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2010

Hardware Availability: May-2009

Software Availability: Feb-2009

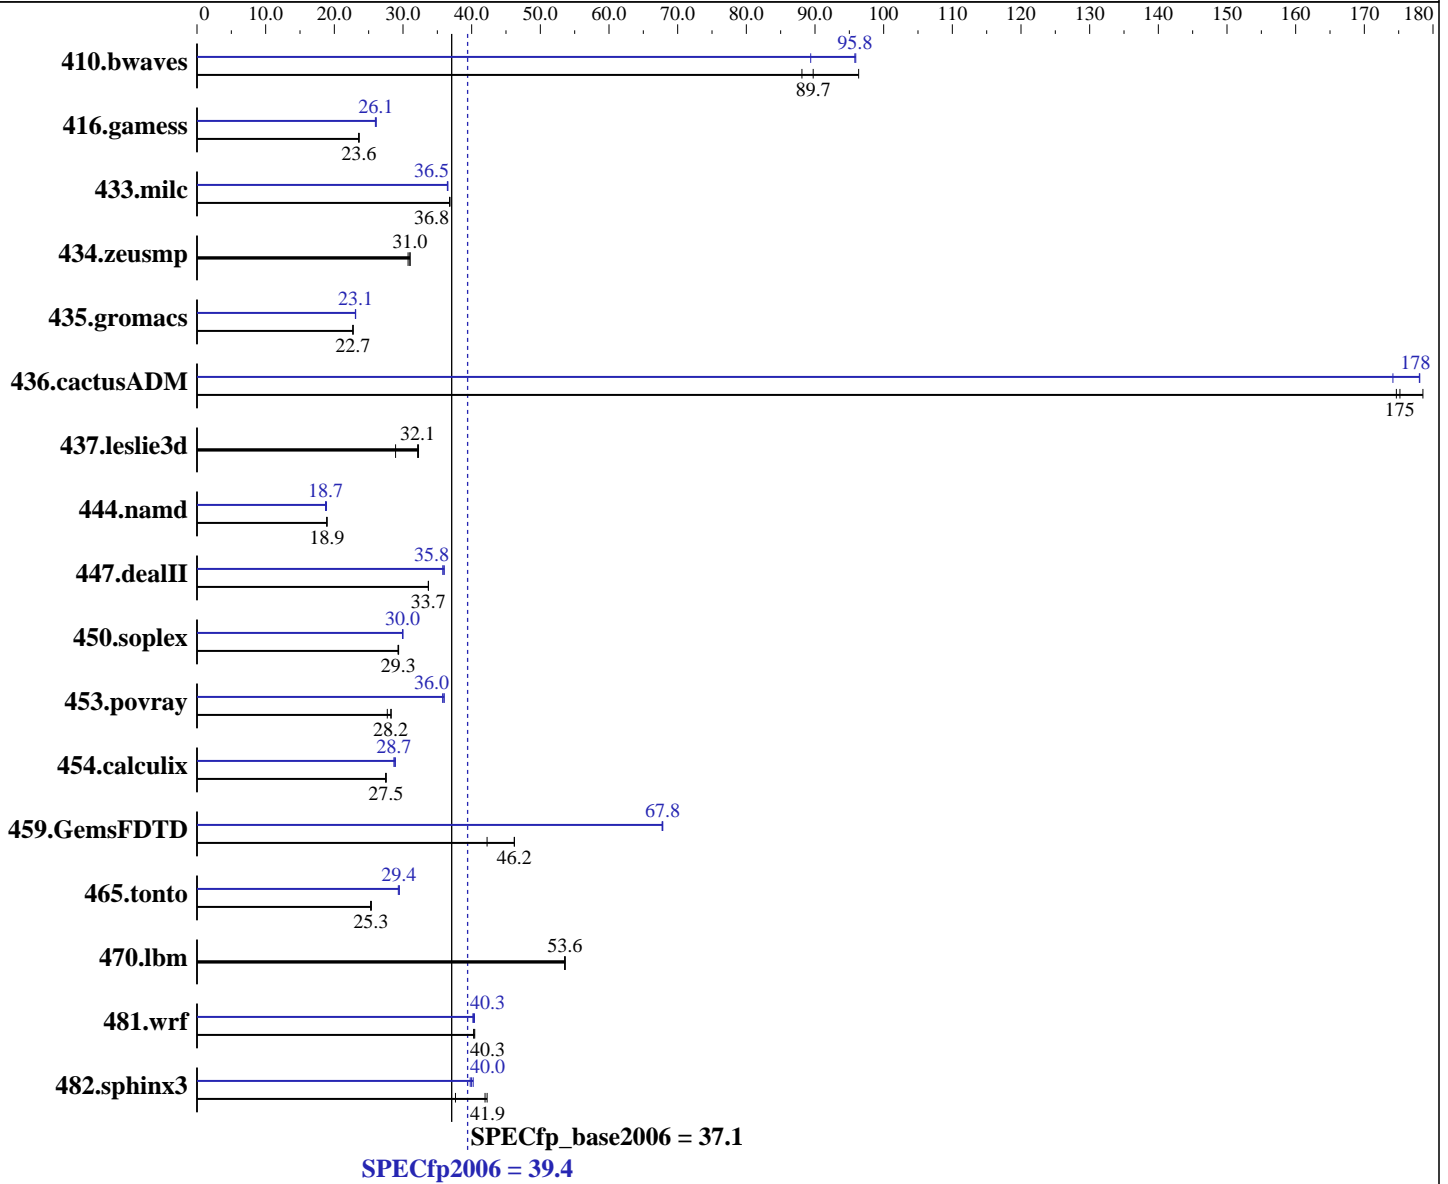

Hardware

CPU Name: Intel Xeon X5560
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon X5560, 2.80 GHz)

SPECfp2006 = 39.4

SPECfp_base2006 = 37.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2010

Hardware Availability: May-2009

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC)
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	154	88.1	151	89.7	141	96.4	152	89.4	142	95.9	142	95.8
416.gamess	830	23.6	832	23.5	830	23.6	750	26.1	751	26.1	754	26.0
433.milc	249	36.8	249	36.8	250	36.8	251	36.5	252	36.5	251	36.5
434.zeusmp	293	31.0	293	31.0	296	30.7	293	31.0	293	31.0	296	30.7
435.gromacs	314	22.7	315	22.7	314	22.7	309	23.1	310	23.1	309	23.1
436.cactusADM	68.4	175	68.2	175	66.9	179	68.6	174	67.1	178	67.1	178
437.leslie3d	325	28.9	293	32.1	291	32.3	325	28.9	293	32.1	291	32.3
444.namd	424	18.9	424	18.9	424	18.9	425	18.9	428	18.7	428	18.7
447.dealII	339	33.7	339	33.7	340	33.7	319	35.8	318	36.0	319	35.8
450.soplex	285	29.3	284	29.3	284	29.4	279	29.9	278	30.0	278	30.0
453.povray	188	28.3	192	27.7	188	28.2	149	35.8	148	36.0	148	36.0
454.calculix	300	27.5	299	27.6	300	27.5	285	28.9	287	28.7	287	28.7
459.GemsFDTD	251	42.2	230	46.2	230	46.2	157	67.7	156	67.8	156	67.8
465.tonto	387	25.4	389	25.3	389	25.3	336	29.3	334	29.4	334	29.5
470.lbm	256	53.6	256	53.6	257	53.5	256	53.6	256	53.6	257	53.5
481.wrf	277	40.3	277	40.3	276	40.4	277	40.3	276	40.4	278	40.2
482.sphinx3	461	42.2	518	37.6	465	41.9	487	40.0	490	39.8	485	40.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon X5560, 2.80 GHz)

SPECfp2006 = 39.4

SPECfp_base2006 = 37.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon X5560, 2.80 GHz)

SPECfp2006 = 39.4

SPECfp_base2006 = 37.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc

450.soplex: icpc -m32

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon X5560, 2.80 GHz)

SPECfp2006 = 39.4

SPECfp_base2006 = 37.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon X5560, 2.80 GHz)

SPECfp2006 = 39.4

SPECfp_base2006 = 37.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100202.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:44:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.