



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECfp®2006 = 42.5

SPECfp_base2006 = 39.8

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

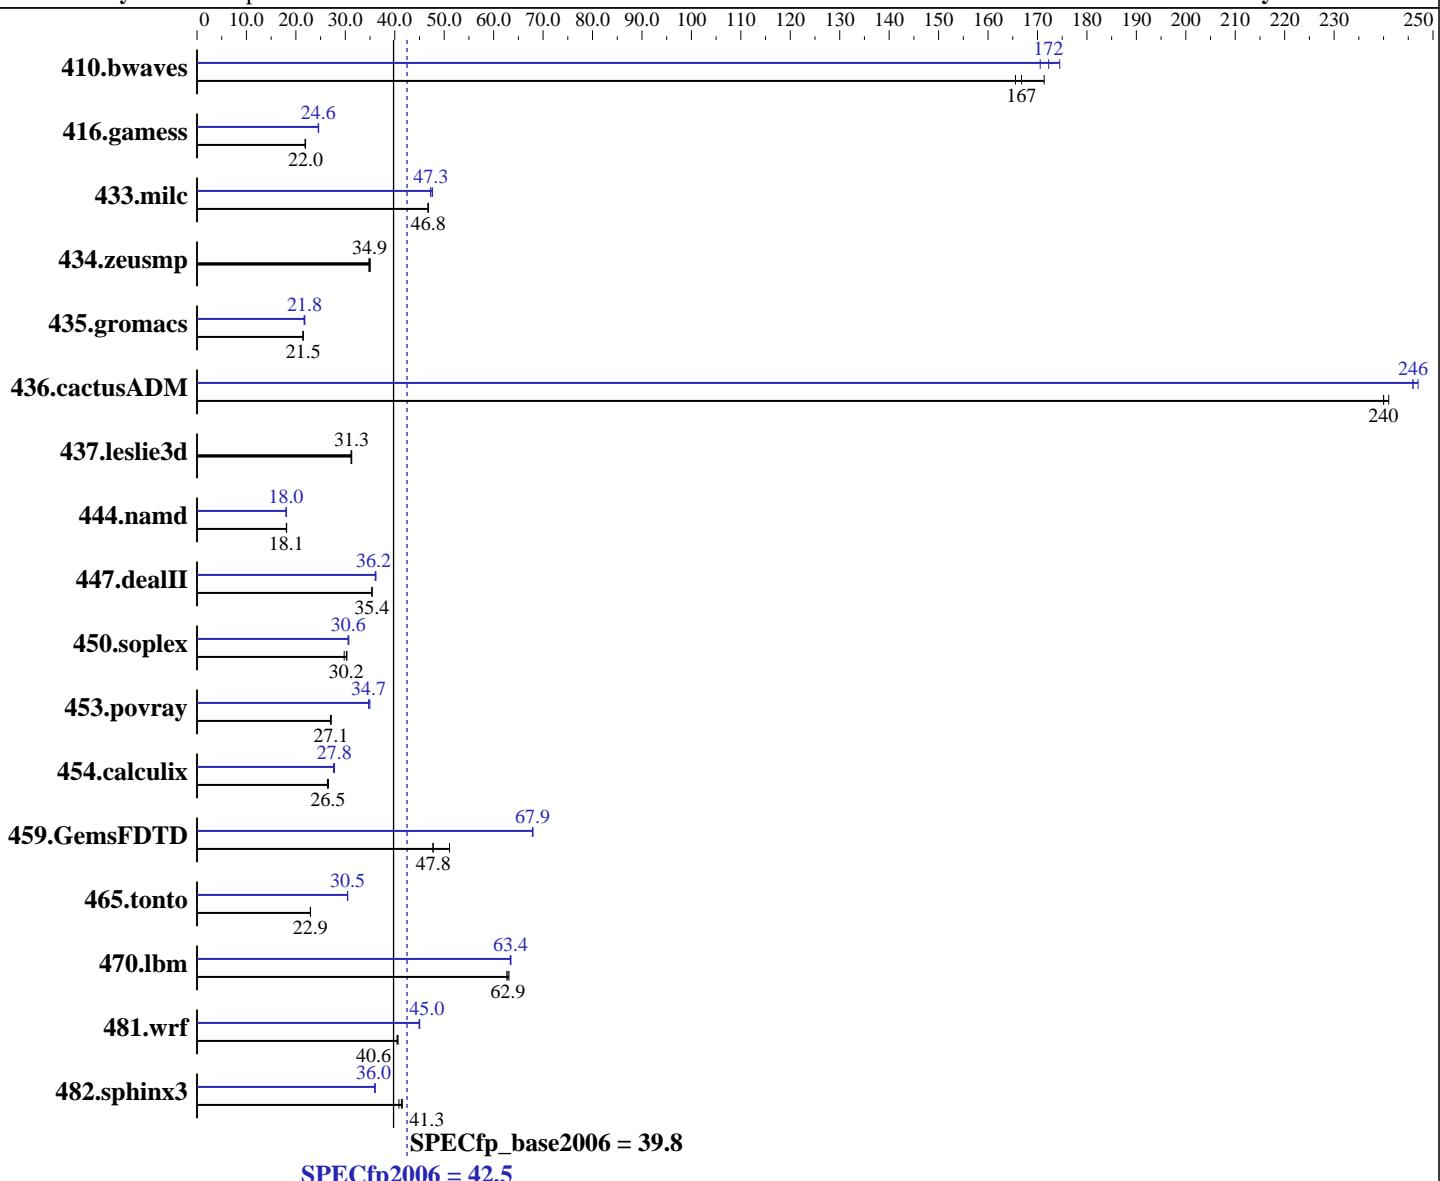

Hardware

CPU Name: Intel Xeon X5650
CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
CPU MHz: 2666
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
Compiler: Kernel 2.6.27.19-5-default
Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
Build 20091130 Package ID: l_cproc_p_11.1.064,
l_cprof_p_11.1.064
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECfp2006 = 42.5

SPECfp_base2006 = 39.8

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
Disk Subsystem:	1 x 320 GB SATA II, 7200 RPM
Other Hardware:	None

Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	79.3	171	82.1	166	<u>81.5</u>	<u>167</u>	77.9	175	79.7	171	<u>78.9</u>	<u>172</u>
416.gamess	896	21.9	892	22.0	<u>892</u>	<u>22.0</u>	796	24.6	<u>797</u>	<u>24.6</u>	798	24.5
433.milc	<u>196</u>	<u>46.8</u>	196	46.7	196	46.8	<u>193</u>	47.6	194	47.3	<u>194</u>	<u>47.3</u>
434.zeusmp	<u>261</u>	<u>34.9</u>	262	34.8	260	35.0	<u>261</u>	<u>34.9</u>	262	34.8	260	35.0
435.gromacs	<u>332</u>	<u>21.5</u>	332	21.5	333	21.4	<u>328</u>	<u>21.8</u>	330	21.7	328	21.8
436.cactusADM	<u>49.8</u>	<u>240</u>	49.6	241	49.8	240	48.6	246	<u>48.6</u>	<u>246</u>	48.4	247
437.leslie3d	<u>301</u>	<u>31.3</u>	301	31.3	302	31.2	<u>301</u>	<u>31.3</u>	301	31.3	302	31.2
444.namd	<u>443</u>	<u>18.1</u>	444	18.1	442	18.1	<u>445</u>	<u>18.0</u>	444	18.0	445	18.0
447.dealII	<u>323</u>	<u>35.4</u>	323	35.4	323	35.4	<u>316</u>	36.2	<u>316</u>	<u>36.2</u>	317	36.0
450.soplex	280	29.8	275	30.3	<u>276</u>	<u>30.2</u>	272	30.7	273	30.6	<u>273</u>	<u>30.6</u>
453.povray	196	27.1	197	27.0	<u>196</u>	<u>27.1</u>	152	35.0	153	34.7	<u>153</u>	<u>34.7</u>
454.calculix	310	26.6	313	26.4	<u>311</u>	<u>26.5</u>	<u>297</u>	<u>27.8</u>	299	27.6	297	27.8
459.GemsFDTD	<u>222</u>	<u>47.8</u>	222	47.7	208	51.1	<u>156</u>	67.9	156	67.8	<u>156</u>	<u>67.9</u>
465.tonto	429	23.0	<u>429</u>	<u>22.9</u>	429	22.9	<u>323</u>	30.5	<u>323</u>	<u>30.5</u>	323	30.4
470.lbm	219	62.7	<u>218</u>	<u>62.9</u>	218	63.1	<u>217</u>	63.4	216	63.5	<u>217</u>	<u>63.4</u>
481.wrf	275	40.7	<u>275</u>	<u>40.6</u>	276	40.5	<u>248</u>	45.1	<u>248</u>	<u>45.0</u>	249	44.9
482.sphinx3	<u>471</u>	<u>41.3</u>	469	41.5	477	40.8	<u>541</u>	<u>36.0</u>	<u>541</u>	<u>36.0</u>	542	36.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was set for stacksize unlimited
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro
PWS-665-PQ power supply, 2 SNK-P0017 heatsinks,
and 1 SAN Ave92 9G0912G101
2 Nidec UltraFlo T92T12MMA7-57 cooling fans.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECfp2006 = 42.5

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECfp2006 = 42.5

SPECfp_base2006 = 39.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 42.5

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECfp_base2006 = 39.8

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 42.5

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECfp_base2006 = 39.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:52:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 May 2010.