



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 36.0

IBM BladeCenter HX5 (Intel Xeon L7555)

SPECfp_base2006 = 32.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

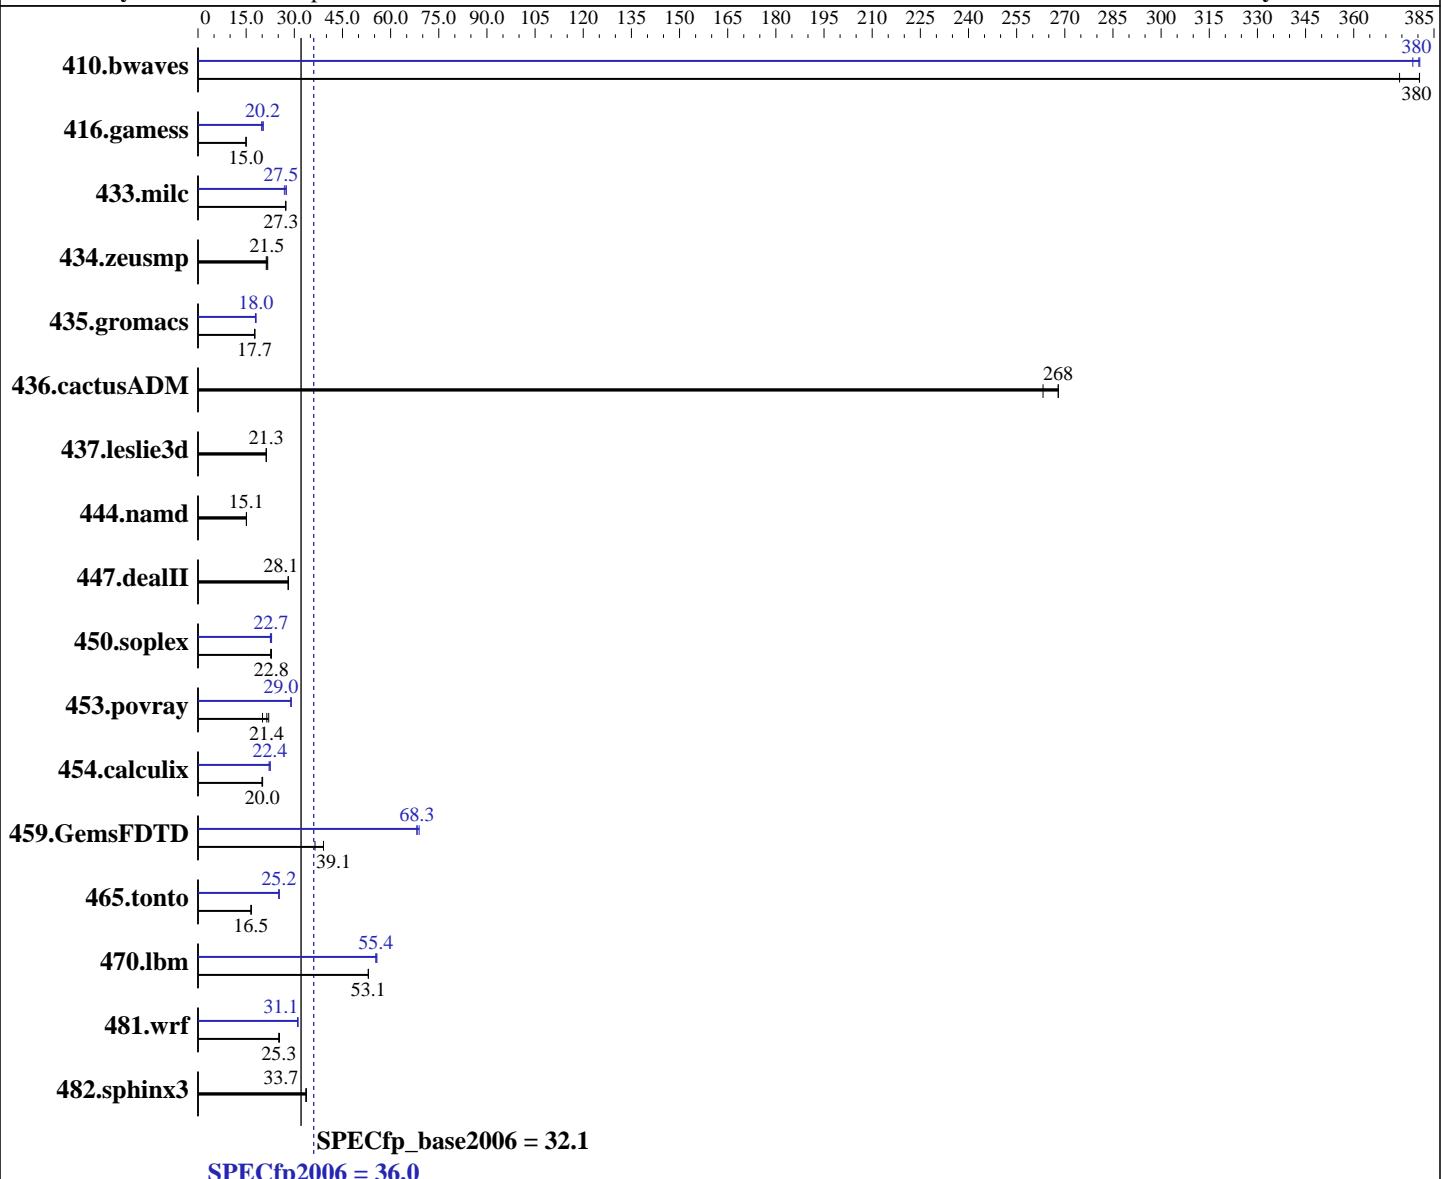

Hardware

CPU Name: Intel Xeon L7555
CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz: 1867
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2,3,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 36.0

IBM BladeCenter HX5 (Intel Xeon L7555)

SPECfp_base2006 = 32.1

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB PC3-8500R, Quad Rank, running at 978 MHz)
 Disk Subsystem: 2 x 50 GB SATA, SSD
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	36.3	374	35.7	381	<u>35.7</u>	<u>380</u>	35.9	378	<u>35.7</u>	<u>380</u>	35.7	381
416.gamess	<u>1307</u>	<u>15.0</u>	1308	15.0	1306	15.0	988	19.8	<u>970</u>	<u>20.2</u>	963	20.3
433.milc	336	27.3	<u>336</u>	<u>27.3</u>	336	27.3	341	26.9	334	27.5	<u>334</u>	<u>27.5</u>
434.zeusmp	419	21.7	428	21.3	<u>424</u>	<u>21.5</u>	419	21.7	428	21.3	<u>424</u>	<u>21.5</u>
435.gromacs	403	17.7	405	17.6	<u>404</u>	<u>17.7</u>	399	17.9	<u>396</u>	<u>18.0</u>	396	18.0
436.cactusADM	45.4	263	44.6	268	<u>44.6</u>	<u>268</u>	45.4	263	44.6	268	<u>44.6</u>	<u>268</u>
437.leslie3d	<u>442</u>	<u>21.3</u>	442	21.2	441	21.3	<u>442</u>	<u>21.3</u>	442	21.2	441	21.3
444.namd	<u>532</u>	<u>15.1</u>	532	15.1	531	15.1	<u>532</u>	<u>15.1</u>	532	15.1	531	15.1
447.dealII	407	28.1	<u>407</u>	<u>28.1</u>	407	28.1	407	28.1	<u>407</u>	<u>28.1</u>	407	28.1
450.soplex	<u>365</u>	<u>22.8</u>	364	22.9	369	22.6	<u>367</u>	<u>22.7</u>	370	22.6	364	22.9
453.povray	265	20.1	242	22.0	<u>248</u>	<u>21.4</u>	184	28.9	<u>184</u>	<u>29.0</u>	183	29.0
454.calculix	414	20.0	<u>412</u>	<u>20.0</u>	410	20.1	367	22.5	373	22.1	<u>368</u>	<u>22.4</u>
459.GemsFDTD	271	39.1	291	36.4	<u>271</u>	<u>39.1</u>	154	68.9	<u>155</u>	<u>68.3</u>	156	68.2
465.tonto	<u>595</u>	<u>16.5</u>	592	16.6	596	16.5	391	25.2	<u>390</u>	<u>25.2</u>	389	25.3
470.lbm	259	53.1	<u>259</u>	<u>53.1</u>	259	53.1	<u>248</u>	<u>55.4</u>	248	55.4	247	55.7
481.wrf	440	25.4	<u>442</u>	<u>25.3</u>	444	25.2	359	31.1	360	31.1	<u>359</u>	<u>31.1</u>
482.sphinx3	578	33.7	<u>578</u>	<u>33.7</u>	579	33.6	<u>578</u>	<u>33.7</u>	<u>578</u>	<u>33.7</u>	579	33.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Boost set to Traditional
 Demand Scrub disabled

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 36.0

IBM BladeCenter HX5 (Intel Xeon L7555)

SPECfp_base2006 = 32.1

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 36.0

IBM BladeCenter HX5 (Intel Xeon L7555)

SPECfp_base2006 = 32.1

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 36.0

IBM BladeCenter HX5 (Intel Xeon L7555)

SPECfp_base2006 = 32.1

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

410.bwaves: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xsSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:10:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 May 2010.