



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]2006 = **26.3**

IBM System x3250 M3 (Intel Pentium G6950)

SPECfp_base2006 = **25.5**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2010

Hardware Availability: Jan-2010

Software Availability: Jan-2010

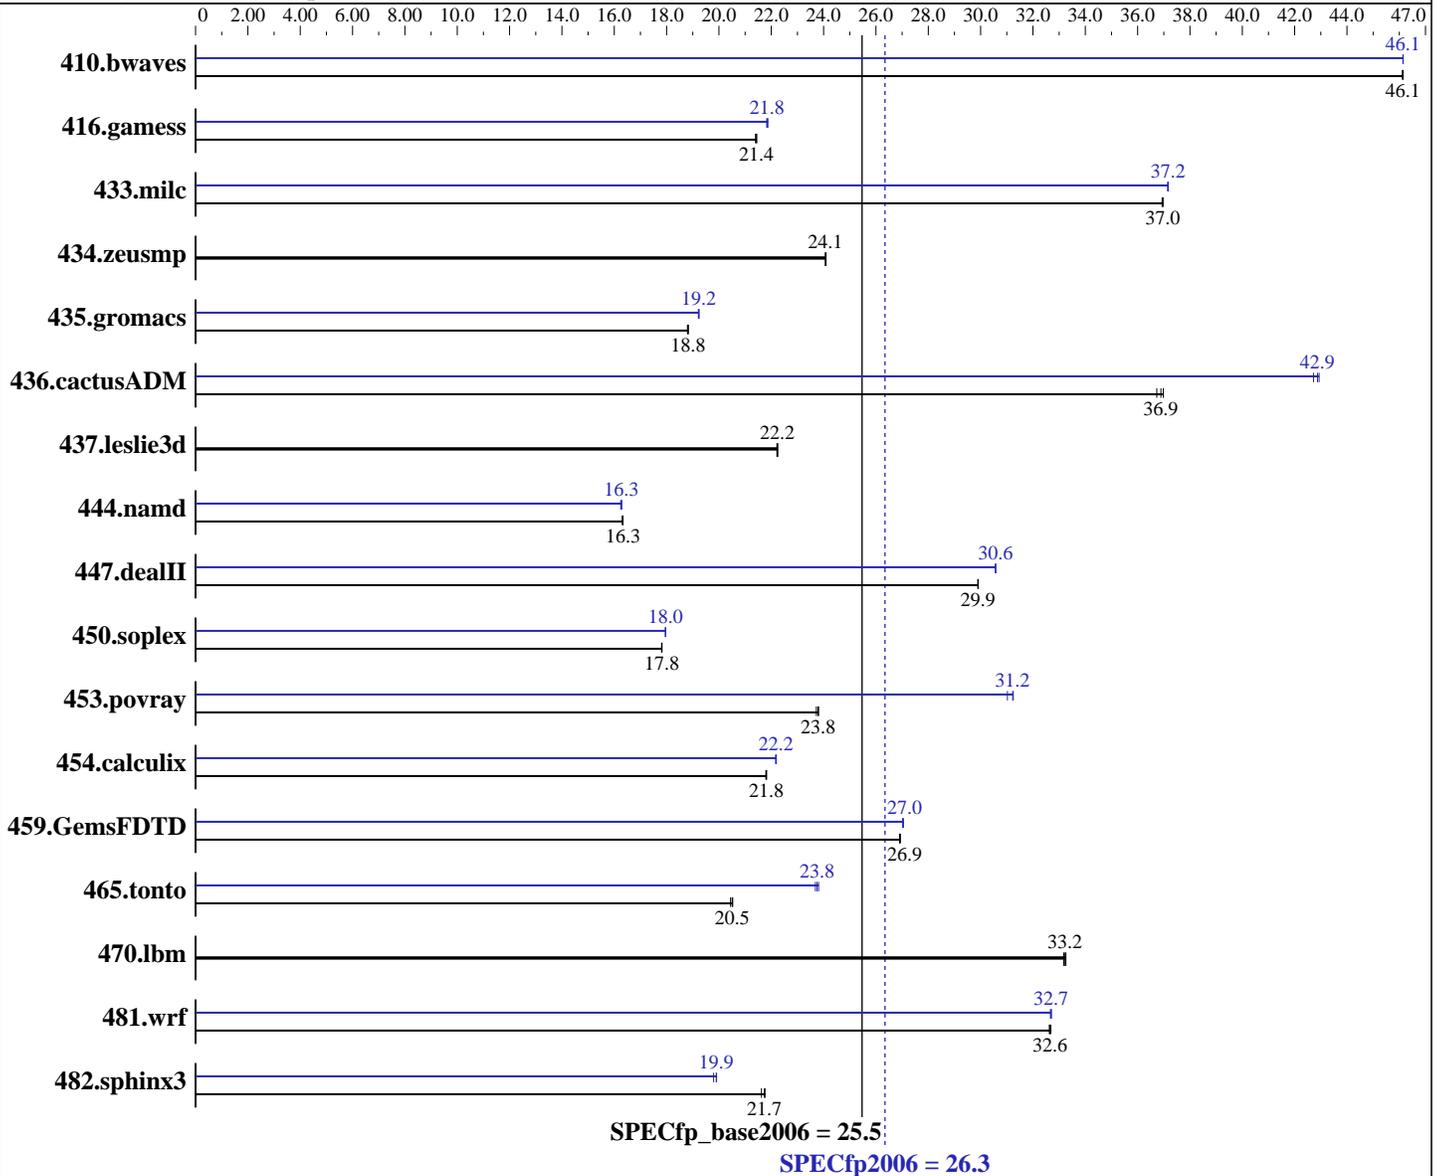

Hardware

CPU Name: Intel Pentium G6950
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = **26.3**

IBM System x3250 M3 (Intel Pentium G6950)

SPECfp_base2006 = **25.5**

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB PC3-10600E CL9, 2 Rank)
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	295	46.1	295	46.1	<u>295</u>	<u>46.1</u>	295	46.1	<u>295</u>	<u>46.1</u>	295	46.1
416.gamess	913	21.4	<u>913</u>	<u>21.4</u>	915	21.4	897	21.8	895	21.9	<u>896</u>	<u>21.8</u>
433.milc	<u>248</u>	<u>37.0</u>	248	37.0	249	36.9	247	37.2	247	37.2	<u>247</u>	<u>37.2</u>
434.zeusmp	378	24.1	<u>378</u>	<u>24.1</u>	378	24.1	378	24.1	<u>378</u>	<u>24.1</u>	378	24.1
435.gromacs	<u>379</u>	<u>18.8</u>	379	18.8	380	18.8	371	19.2	<u>371</u>	<u>19.2</u>	372	19.2
436.cactusADM	<u>324</u>	<u>36.9</u>	323	37.0	325	36.7	278	42.9	<u>279</u>	<u>42.9</u>	280	42.7
437.leslie3d	<u>423</u>	<u>22.2</u>	423	22.2	423	22.2	<u>423</u>	<u>22.2</u>	423	22.2	423	22.2
444.namd	<u>491</u>	<u>16.3</u>	492	16.3	491	16.3	<u>493</u>	<u>16.3</u>	492	16.3	494	16.2
447.dealII	383	29.9	<u>383</u>	<u>29.9</u>	383	29.9	374	30.6	374	30.6	<u>374</u>	<u>30.6</u>
450.soplex	468	17.8	<u>468</u>	<u>17.8</u>	468	17.8	464	18.0	<u>464</u>	<u>18.0</u>	465	18.0
453.povray	223	23.8	224	23.7	<u>224</u>	<u>23.8</u>	170	31.2	171	31.0	<u>170</u>	<u>31.2</u>
454.calculix	<u>378</u>	<u>21.8</u>	378	21.8	379	21.8	372	22.2	<u>372</u>	<u>22.2</u>	372	22.2
459.GemsFDTD	<u>394</u>	<u>26.9</u>	394	26.9	394	26.9	393	27.0	<u>393</u>	<u>27.0</u>	392	27.1
465.tonto	479	20.5	<u>480</u>	<u>20.5</u>	481	20.4	413	23.8	<u>414</u>	<u>23.8</u>	415	23.7
470.lbm	<u>414</u>	<u>33.2</u>	413	33.3	414	33.2	<u>414</u>	<u>33.2</u>	413	33.3	414	33.2
481.wrf	342	32.7	<u>342</u>	<u>32.6</u>	342	32.6	<u>342</u>	<u>32.7</u>	342	32.7	342	32.7
482.sphinx3	896	21.8	901	21.6	<u>897</u>	<u>21.7</u>	979	19.9	<u>980</u>	<u>19.9</u>	985	19.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Mode Enable
 Turbo Boost set to Traditional
 CPU C State Enable

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 26.3

IBM System x3250 M3 (Intel Pentium G6950)

SPECfp_base2006 = 25.5

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 26.3

IBM System x3250 M3 (Intel Pentium G6950)

SPECfp_base2006 = 25.5

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -auto-ilp32

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 26.3

IBM System x3250 M3 (Intel Pentium G6950)

SPECfp_base2006 = 25.5

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 08:38:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 June 2010.