



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECint®2006 = 48.8

3DBOXX WORKSTATION 8550 EXXTREME

SPECint_base2006 = 45.7

CPU2006 license: 3314


Test date: Sep-2010

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Sep-2010

Tested by: BOXX Technologies, Inc.

Software Availability: Sep-2010

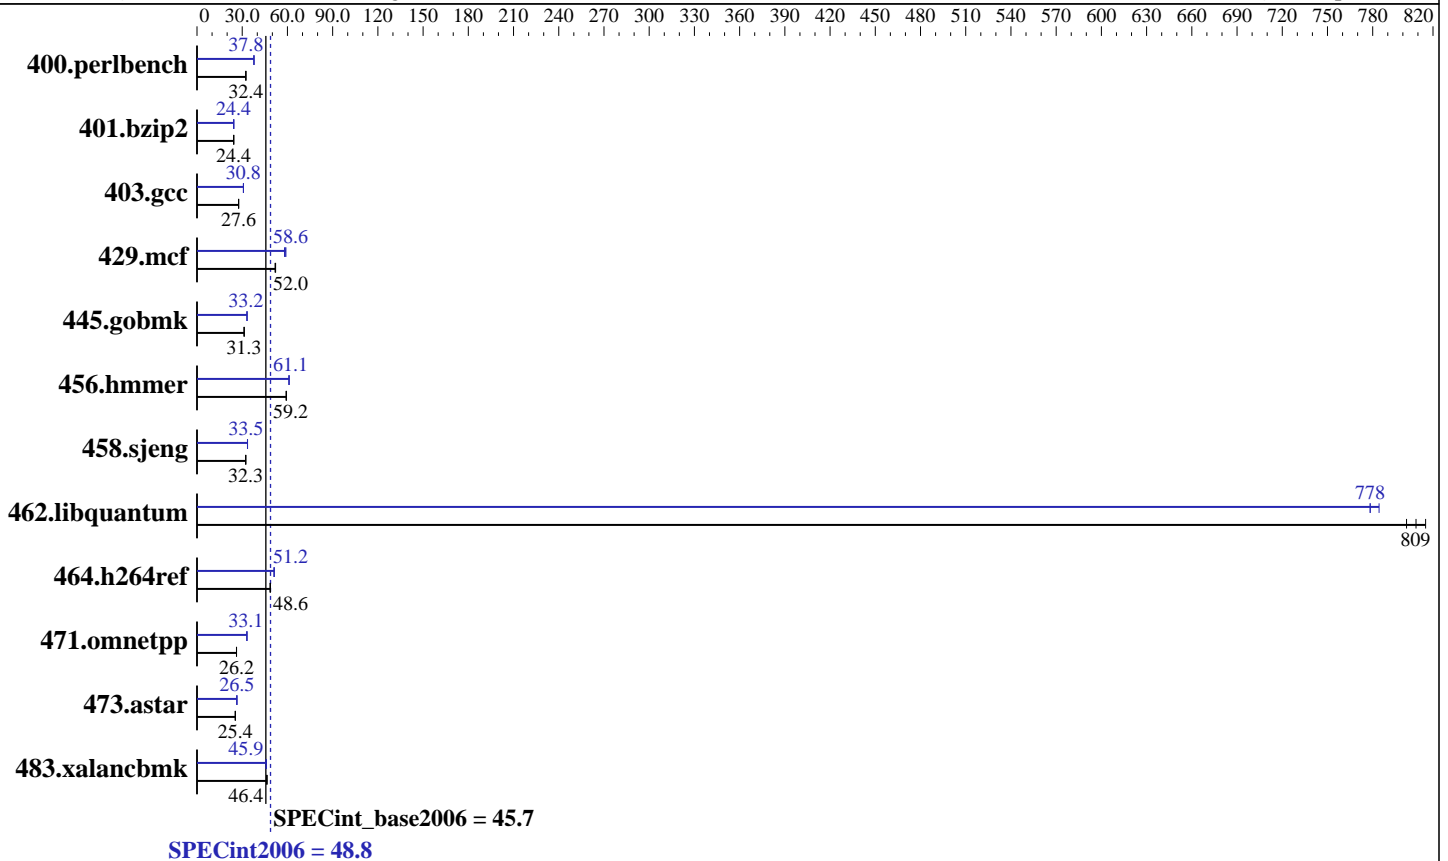

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology disabled
 CPU MHz: 4200
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 2 Processors
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 300 GB SATA II, 10,000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Desktop 11 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECint2006 = 48.8

3DBOXX WORKSTATION 8550 EXXTREME

SPECint_base2006 = 45.7

CPU2006 license: 3314

Test date: Sep-2010

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Sep-2010

Tested by: BOXX Technologies, Inc.

Software Availability: Sep-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	302	32.4	301	32.4	<u>301</u>	<u>32.4</u>	259	37.8	<u>258</u>	<u>37.8</u>	258	37.8
401.bzip2	396	24.4	396	24.4	<u>396</u>	<u>24.4</u>	396	24.4	396	24.4	<u>396</u>	<u>24.4</u>
403.gcc	291	27.7	<u>291</u>	<u>27.6</u>	292	27.5	261	30.8	<u>261</u>	<u>30.8</u>	261	30.8
429.mcf	175	52.2	176	51.9	<u>176</u>	<u>52.0</u>	<u>156</u>	<u>58.6</u>	157	58.1	155	59.0
445.gobmk	335	31.3	<u>335</u>	<u>31.3</u>	335	31.3	<u>316</u>	<u>33.2</u>	316	33.2	316	33.2
456.hmmer	158	59.1	<u>157</u>	<u>59.2</u>	157	59.4	153	61.1	<u>153</u>	<u>61.1</u>	153	61.0
458.sjeng	<u>374</u>	<u>32.3</u>	374	32.3	374	32.3	361	33.5	361	33.5	<u>361</u>	<u>33.5</u>
462.libquantum	25.8	802	25.4	815	<u>25.6</u>	<u>809</u>	26.6	778	26.4	784	<u>26.6</u>	<u>778</u>
464.h264ref	<u>455</u>	<u>48.6</u>	454	48.7	456	48.5	432	51.2	<u>432</u>	<u>51.2</u>	432	51.2
471.omnetpp	239	26.2	238	26.2	<u>238</u>	<u>26.2</u>	189	33.1	188	33.2	<u>189</u>	<u>33.1</u>
473.astar	276	25.4	<u>276</u>	<u>25.4</u>	276	25.4	266	26.4	<u>265</u>	<u>26.5</u>	265	26.5
483.xalancbmk	<u>149</u>	<u>46.4</u>	150	46.2	148	46.5	150	46.1	<u>150</u>	<u>45.9</u>	151	45.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECint2006 = 48.8

3DBOXX WORKSTATION 8550 EXXTREME

SPECint_base2006 = 45.7

CPU2006 license: 3314

Test date: Sep-2010

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Sep-2010

Tested by: BOXX Technologies, Inc.

Software Availability: Sep-2010

Base Portability Flags (Continued)

471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECint2006 = 48.8

3DBOXX WORKSTATION 8550 EXXTREME

SPECint_base2006 = 45.7

CPU2006 license: 3314

Test date: Sep-2010

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Sep-2010

Tested by: BOXX Technologies, Inc.

Software Availability: Sep-2010

Peak Portability Flags (Continued)

403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bz2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECint2006 = 48.8

3DBOXX WORKSTATION 8550 EXXTREME

SPECint_base2006 = 45.7

CPU2006 license: 3314

Test date: Sep-2010

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Sep-2010

Tested by: BOXX Technologies, Inc.

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:28:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 November 2010.