



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp<sup>®</sup>\_rate2006 = 178

PRIMERGY BX620 S6, Intel Xeon E5640, 2.67 GHz

### SPECfp\_rate\_base2006 = 172

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

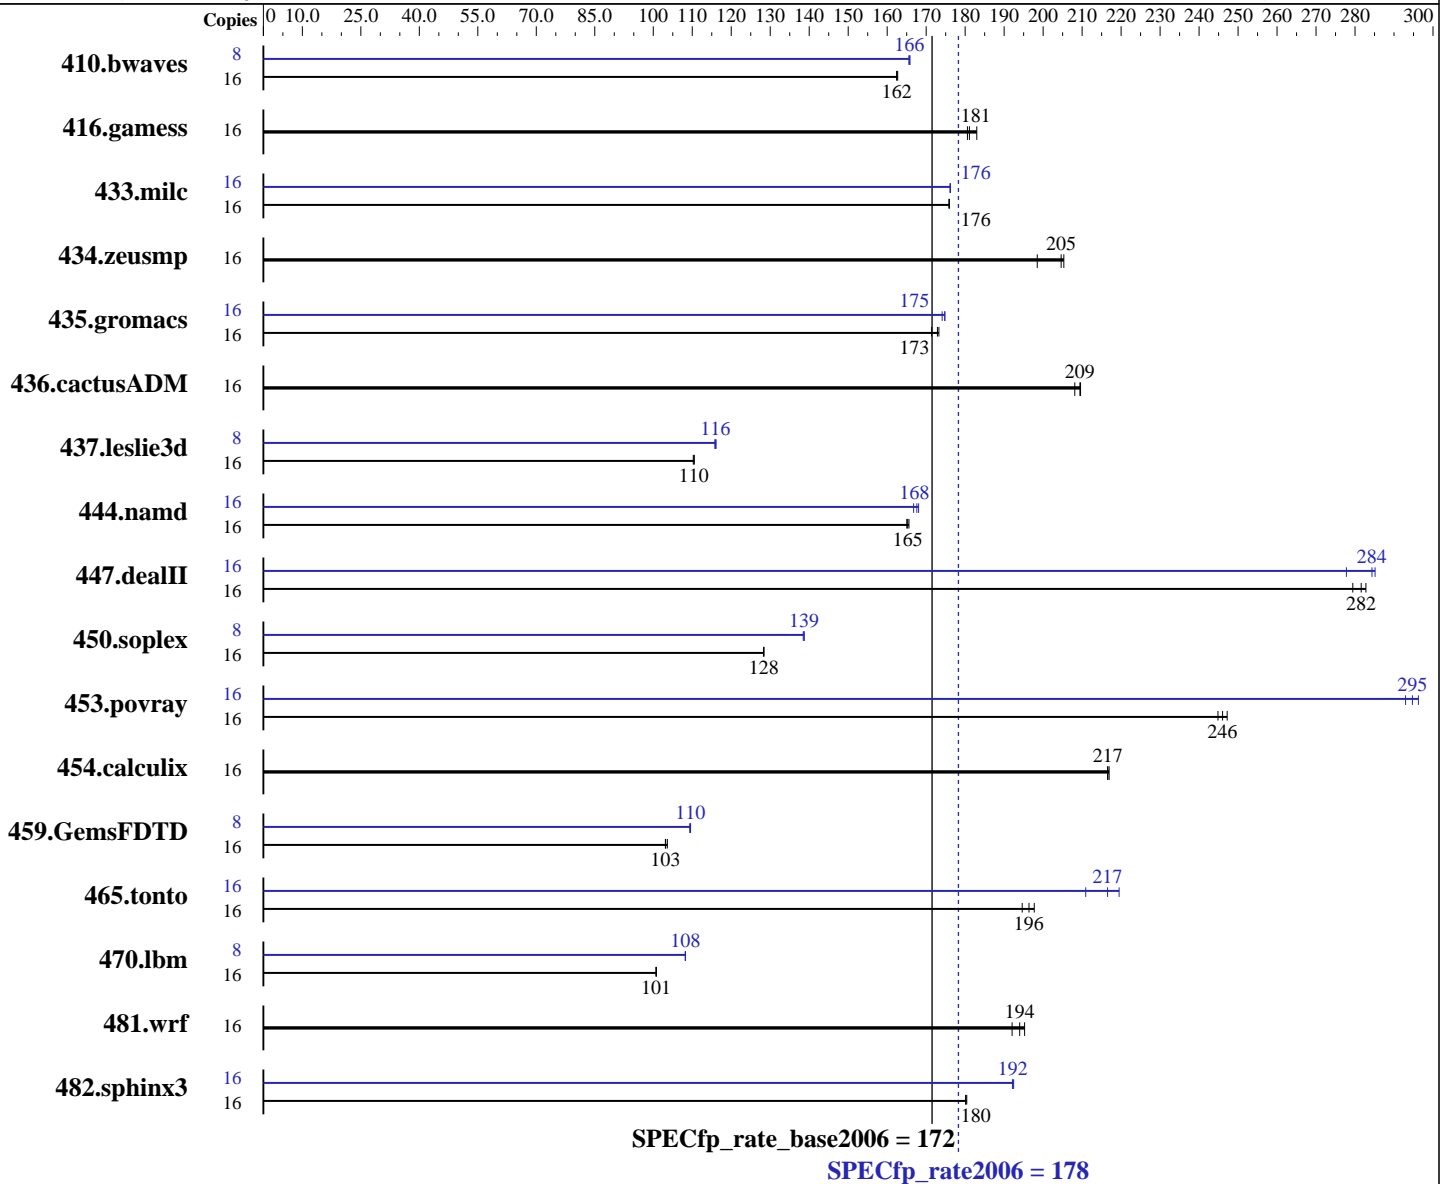

### Hardware

CPU Name: Intel Xeon E5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064, 1\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 178

PRIMERGY BX620 S6, Intel Xeon E5640, 2.67 GHz

SPECfp\_rate\_base2006 = 172

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
Other Hardware: --

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1336	163	<b>1338</b>	<b>162</b>	1339	162	8	657	166	<b>656</b>	<b>166</b>	656	166
416.gamess	16	<b>1730</b>	<b>181</b>	1712	183	1735	181	16	<b>1730</b>	<b>181</b>	1712	183	1735	181
433.milc	16	835	176	835	176	<b>835</b>	<b>176</b>	16	833	176	834	176	<b>834</b>	<b>176</b>
434.zeusmp	16	734	198	<b>712</b>	<b>205</b>	709	205	16	734	198	<b>712</b>	<b>205</b>	709	205
435.gromacs	16	659	173	667	171	<b>661</b>	<b>173</b>	16	<b>654</b>	<b>175</b>	656	174	654	175
436.cactusADM	16	919	208	<b>913</b>	<b>209</b>	912	210	16	919	208	<b>913</b>	<b>209</b>	912	210
437.leslie3d	16	1361	111	<b>1362</b>	<b>110</b>	1364	110	8	648	116	<b>649</b>	<b>116</b>	649	116
444.namd	16	<b>776</b>	<b>165</b>	775	166	778	165	16	<b>766</b>	<b>168</b>	769	167	764	168
447.dealII	16	<b>650</b>	<b>282</b>	655	279	647	283	16	642	285	659	278	<b>644</b>	<b>284</b>
450.soplex	16	1040	128	<b>1040</b>	<b>128</b>	1040	128	8	481	139	482	138	<b>481</b>	<b>139</b>
453.povray	16	<b>346</b>	<b>246</b>	344	247	348	245	16	287	296	291	293	<b>289</b>	<b>295</b>
454.calculix	16	609	217	610	217	<b>609</b>	<b>217</b>	16	609	217	610	217	<b>609</b>	<b>217</b>
459.GemsFDTD	16	1638	104	1646	103	<b>1645</b>	<b>103</b>	8	<b>775</b>	<b>110</b>	776	109	775	110
465.tonto	16	796	198	<b>802</b>	<b>196</b>	809	195	16	746	211	<b>727</b>	<b>217</b>	717	219
470.lbm	16	2181	101	<b>2182</b>	<b>101</b>	2183	101	8	<b>1016</b>	<b>108</b>	1015	108	1016	108
481.wrf	16	915	195	<b>921</b>	<b>194</b>	931	192	16	915	195	<b>921</b>	<b>194</b>	931	192
482.sphinx3	16	1731	180	1728	180	<b>1731</b>	<b>180</b>	16	1620	192	1623	192	<b>1622</b>	<b>192</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 1067 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disable  
Performance/Power Setting = Traditional



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 178

PRIMERGY BX620 S6, Intel Xeon E5640, 2.67 GHz

SPECfp\_rate\_base2006 = 172

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: Jan-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 178

PRIMERGY BX620 S6, Intel Xeon E5640, 2.67 GHz

SPECfp\_rate\_base2006 = 172

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 178**

**PRIMERGY BX620 S6, Intel Xeon E5640, 2.67 GHz**

**SPECfp\_rate\_base2006 = 172**

**CPU2006 license:** 19

**Test date:** Aug-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 178

PRIMERGY BX620 S6, Intel Xeon E5640, 2.67 GHz

SPECfp\_rate\_base2006 = 172

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:53:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 October 2010.