



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECfp<sup>®</sup>\_rate2006 = 314

Motherboard H8DGU-LN4F+, AMD Opteron 6174

### SPECfp\_rate\_base2006 = 289

CPU2006 license: 001176


Test date: Sep-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jul-2010

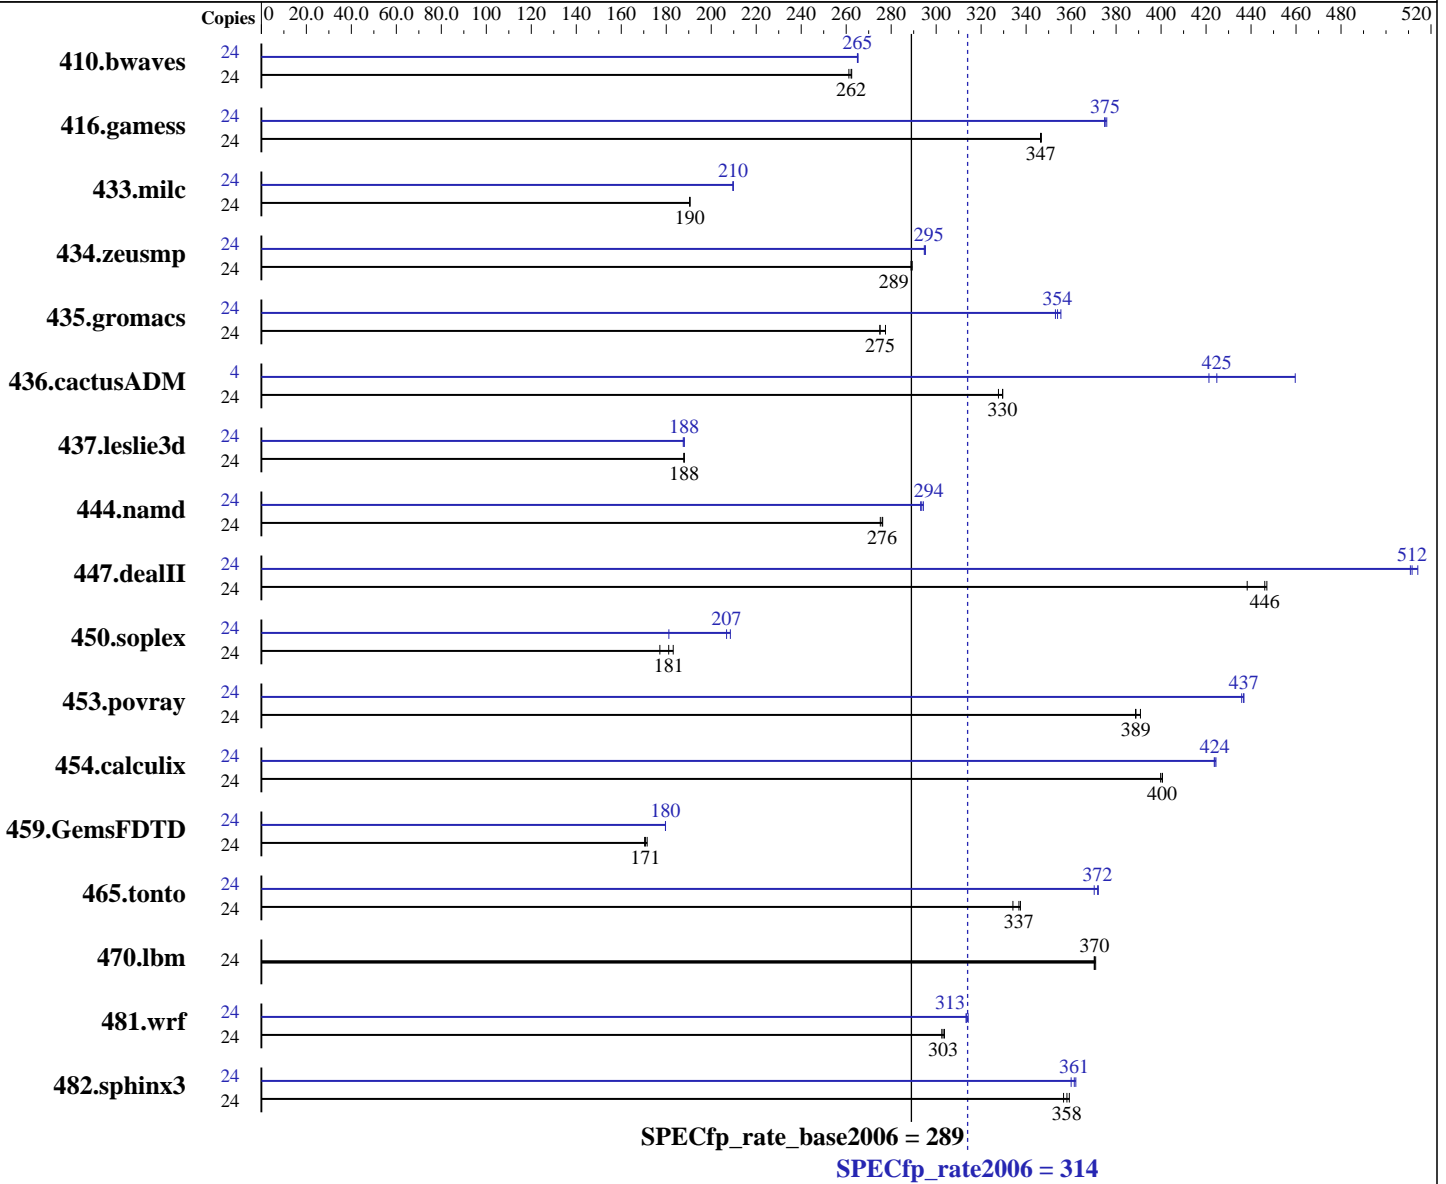

### Hardware

CPU Name: AMD Opteron 6174  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 314

Motherboard H8DGU-LN4F+, AMD Opteron 6174

SPECfp\_rate\_base2006 = 289

CPU2006 license: 001176

Test date: Sep-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 2000 GB SATA, 7200 RPM  
 Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1249	261	<u>1244</u>	<u>262</u>	1243	262	24	<u>1231</u>	<u>265</u>	1231	265	1229	265
416.gamess	24	<u>1356</u>	<u>347</u>	1355	347	1357	346	24	1253	375	1250	376	<u>1253</u>	<u>375</u>
433.milc	24	1156	191	1157	190	<u>1157</u>	<u>190</u>	24	<u>1050</u>	<u>210</u>	1050	210	1051	210
434.zeusmp	24	755	289	<u>756</u>	<u>289</u>	756	289	24	740	295	741	295	<u>740</u>	<u>295</u>
435.gromacs	24	618	277	623	275	<u>623</u>	<u>275</u>	24	485	353	482	355	<u>484</u>	<u>354</u>
436.cactusADM	24	<u>870</u>	<u>330</u>	875	328	870	330	4	<u>113</u>	<u>425</u>	104	460	113	421
437.leslie3d	24	<u>1200</u>	<u>188</u>	1201	188	1200	188	24	<u>1201</u>	<u>188</u>	1200	188	1203	188
444.namd	24	700	275	<u>697</u>	<u>276</u>	697	276	24	654	294	<u>656</u>	<u>294</u>	657	293
447.dealII	24	614	447	<u>615</u>	<u>446</u>	626	438	24	534	514	<u>537</u>	<u>512</u>	537	511
450.soplex	24	1130	177	1093	183	<u>1105</u>	<u>181</u>	24	1105	181	<u>968</u>	<u>207</u>	960	209
453.povray	24	327	391	<u>328</u>	<u>389</u>	329	389	24	293	436	<u>292</u>	<u>437</u>	292	437
454.calculix	24	494	401	<u>494</u>	<u>400</u>	495	400	24	467	424	467	424	<u>467</u>	<u>424</u>
459.GemsFDTD	24	<u>1491</u>	<u>171</u>	1485	172	1495	170	24	1417	180	1418	180	<u>1417</u>	<u>180</u>
465.tonto	24	<u>701</u>	<u>337</u>	707	334	700	337	24	638	370	<u>635</u>	<u>372</u>	635	372
470.lbm	24	<u>890</u>	<u>370</u>	891	370	889	371	24	<u>890</u>	<u>370</u>	891	370	889	371
481.wrf	24	<u>885</u>	<u>303</u>	886	303	883	304	24	856	313	853	314	<u>855</u>	<u>313</u>
482.sphinx3	24	1302	359	<u>1306</u>	<u>358</u>	1312	357	24	1299	360	<u>1294</u>	<u>361</u>	1292	362

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
 mount -t hugetlbfs nodev /mnt/hugepages  
 Test in CSE-829TS chassis.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 314

Motherboard H8DGU-LN4F+, AMD Opteron 6174

SPECfp\_rate\_base2006 = 289

CPU2006 license: 001176

Test date: Sep-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jul-2010

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP\_NUM\_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 314

Motherboard H8DGU-LN4F+, AMD Opteron 6174

SPECfp\_rate\_base2006 = 289

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2010  
Hardware Availability: Mar-2010  
Software Availability: Jul-2010

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 314

Motherboard H8DGU-LN4F+, AMD Opteron 6174

SPECfp\_rate\_base2006 = 289

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2010  
Hardware Availability: Mar-2010  
Software Availability: Jul-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 314

Motherboard H8DGU-LN4F+, AMD Opteron 6174

SPECfp\_rate\_base2006 = 289

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2010  
Hardware Availability: Mar-2010  
Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:15:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 October 2010.