



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

## SPECfp<sup>®</sup>\_rate2006 = 170

### Sun Fire X4270 M2 (Intel Xeon E5620 2.4 GHz)

## SPECfp\_rate\_base2006 = 164

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Sep-2010

Hardware Availability: Jun-2010

Software Availability: Apr-2010

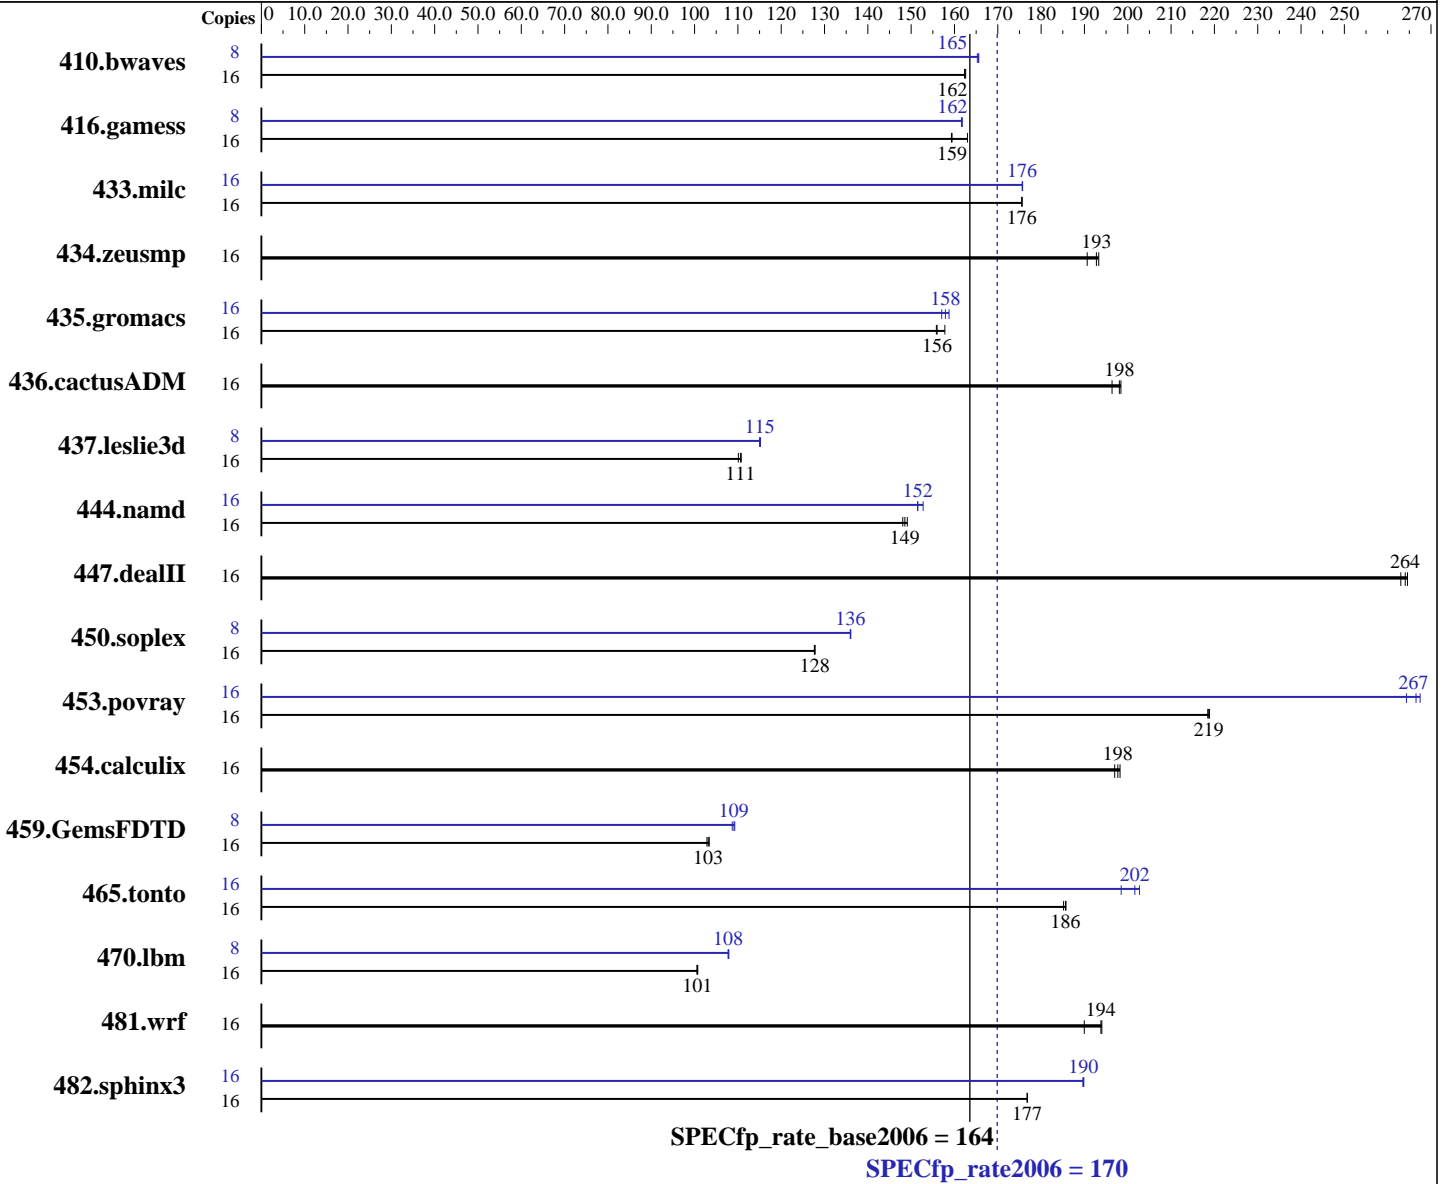

### Hardware

CPU Name: Intel Xeon E5620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Oracle Enterprise Linux Server release 5.5 kernel 2.6.18-194.el5  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

SPECfp\_rate2006 = 170

Sun Fire X4270 M2 (Intel Xeon E5620 2.4 GHz)

SPECfp\_rate\_base2006 = 164

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 146 GB SAS, 10000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	<b>1339</b>	<b>162</b>	1337	163	1340	162	8	658	165	<b>657</b>	<b>165</b>	657	166		
416.gamess	16	<b>1965</b>	<b>159</b>	1922	163	1967	159	8	<b>969</b>	<b>162</b>	969	162	968	162		
433.milc	16	836	176	<b>837</b>	<b>176</b>	837	176	16	836	176	<b>836</b>	<b>176</b>	836	176		
434.zeusmp	16	753	193	<b>755</b>	<b>193</b>	764	191	16	753	193	<b>755</b>	<b>193</b>	764	191		
435.gromacs	16	724	158	733	156	<b>732</b>	<b>156</b>	16	727	157	<b>723</b>	<b>158</b>	720	159		
436.cactusADM	16	964	198	<b>965</b>	<b>198</b>	974	196	16	964	198	<b>965</b>	<b>198</b>	974	196		
437.leslie3d	16	<b>1359</b>	<b>111</b>	1366	110	1358	111	8	654	115	<b>653</b>	<b>115</b>	653	115		
444.namd	16	867	148	<b>864</b>	<b>149</b>	861	149	16	<b>847</b>	<b>152</b>	840	153	847	151		
447.dealII	16	<b>693</b>	<b>264</b>	696	263	692	265	16	<b>693</b>	<b>264</b>	696	263	692	265		
450.soplex	16	1044	128	<b>1045</b>	<b>128</b>	1045	128	8	490	136	491	136	<b>491</b>	<b>136</b>		
453.povray	16	389	219	390	218	<b>389</b>	<b>219</b>	16	318	267	<b>319</b>	<b>267</b>	322	264		
454.calculix	16	666	198	<b>668</b>	<b>198</b>	670	197	16	666	198	<b>668</b>	<b>198</b>	670	197		
459.GemsFDTD	16	<b>1645</b>	<b>103</b>	1642	103	1650	103	8	<b>778</b>	<b>109</b>	777	109	781	109		
465.tonto	16	850	185	<b>848</b>	<b>186</b>	848	186	16	793	198	<b>781</b>	<b>202</b>	777	203		
470.lbm	16	2182	101	<b>2184</b>	<b>101</b>	2186	101	8	1019	108	<b>1020</b>	<b>108</b>	1020	108		
481.wrf	16	<b>922</b>	<b>194</b>	921	194	941	190	16	<b>922</b>	<b>194</b>	921	194	941	190		
482.sphinx3	16	<b>1764</b>	<b>177</b>	1764	177	1763	177	16	1643	190	<b>1643</b>	<b>190</b>	1644	190		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used to invoke the command numactl to bind copies to the cores. (For details, please see the config file.)

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

Load Default BIOS Settings and then change the following  
C-State Disabled  
Data Reuse Optimization Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 170

Sun Fire X4270 M2 (Intel Xeon E5620 2.4 GHz)

SPECfp\_rate\_base2006 = 164

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

## Platform Notes (Continued)

Hardware Prefetch Enabled  
Adjacent Cache Line Prefetch Enabled  
L1 Data Prefetch Enabled

## General Notes

This result is measured on a Sun Fire X4170 M2 server. The Sun Fire X4170 M2 and the Sun Fire X4270 M2 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 170

Sun Fire X4270 M2 (Intel Xeon E5620 2.4 GHz)

SPECfp\_rate\_base2006 = 164

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 170

Sun Fire X4270 M2 (Intel Xeon E5620 2.4 GHz)

SPECfp\_rate\_base2006 = 164

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 170

Sun Fire X4270 M2 (Intel Xeon E5620 2.4 GHz)

SPECfp\_rate\_base2006 = 164

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

## Peak Optimization Flags (Continued)

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.html>  
[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.20101027.html](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.xml>  
[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.20101027.xml](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:18:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 October 2010.