



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 22.2

IBM BladeCenter HS22V (Intel Xeon E5503)

SPECint_base2006 = 20.5

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

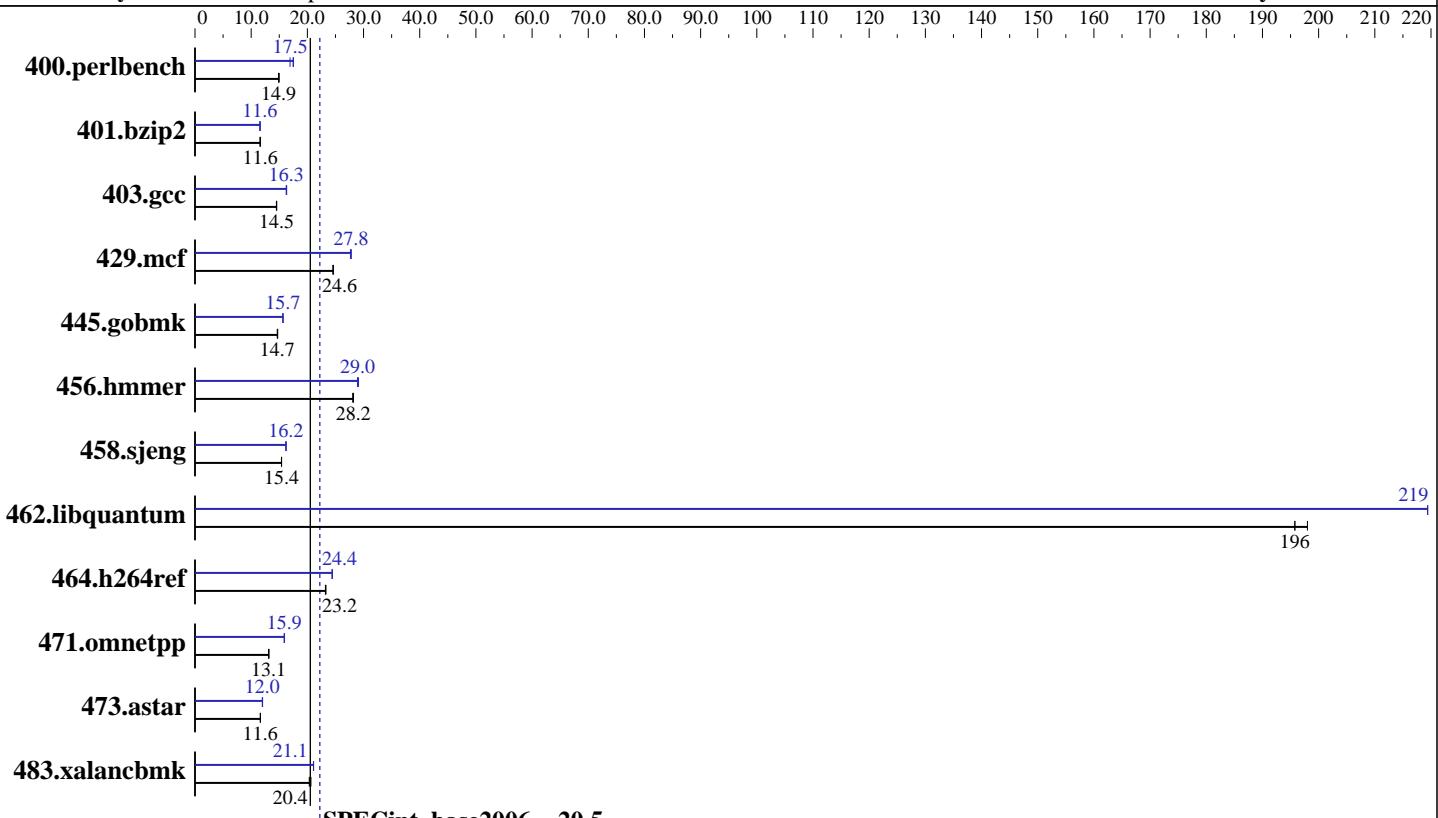

Hardware

| | |
|----------------------|--|
| CPU Name: | Intel Xeon E5503 |
| CPU Characteristics: | |
| CPU MHz: | 2000 |
| FPU: | Integrated |
| CPU(s) enabled: | 4 cores, 2 chips, 2 cores/chip |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 4 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 24 GB (12 x 2 GB 2Rx8 PC3-10600R, ECC, running at 800 MHz and CL6) |
| Disk Subsystem: | 2 x 50 GB SATA, SSD, RAID 0 |
| Other Hardware: | None |

Software

| | |
|-------------------|---|
| Operating System: | SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default |
| Compiler: | Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064 |
| Auto Parallel: | Yes |
| File System: | ext3 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V8.1 |



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.2

IBM BladeCenter HS22V (Intel Xeon E5503)

SPECint_base2006 = 20.5

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 656 | 14.9 | 652 | 15.0 | 657 | 14.9 | 560 | 17.5 | 557 | 17.5 | 577 | 16.9 |
| 401.bzip2 | 830 | 11.6 | 833 | 11.6 | 831 | 11.6 | 835 | 11.6 | 834 | 11.6 | 832 | 11.6 |
| 403.gcc | 553 | 14.5 | 554 | 14.5 | 556 | 14.5 | 493 | 16.3 | 495 | 16.3 | 495 | 16.2 |
| 429.mcf | 371 | 24.6 | 371 | 24.6 | 371 | 24.6 | 330 | 27.7 | 328 | 27.8 | 328 | 27.8 |
| 445.gobmk | 716 | 14.7 | 715 | 14.7 | 713 | 14.7 | 670 | 15.6 | 670 | 15.7 | 670 | 15.7 |
| 456.hmmer | 331 | 28.2 | 331 | 28.2 | 332 | 28.1 | 323 | 28.9 | 321 | 29.1 | 322 | 29.0 |
| 458 sjeng | 786 | 15.4 | 786 | 15.4 | 785 | 15.4 | 748 | 16.2 | 747 | 16.2 | 747 | 16.2 |
| 462.libquantum | 106 | 196 | 106 | 196 | 105 | 198 | 94.4 | 219 | 94.4 | 219 | 94.4 | 219 |
| 464.h264ref | 950 | 23.3 | 953 | 23.2 | 952 | 23.2 | 907 | 24.4 | 905 | 24.4 | 906 | 24.4 |
| 471.omnetpp | 477 | 13.1 | 477 | 13.1 | 475 | 13.2 | 393 | 15.9 | 393 | 15.9 | 392 | 15.9 |
| 473.astar | 604 | 11.6 | 602 | 11.7 | 603 | 11.6 | 583 | 12.0 | 586 | 12.0 | 584 | 12.0 |
| 483.xalancbmk | 334 | 20.6 | 338 | 20.4 | 339 | 20.3 | 327 | 21.1 | 327 | 21.1 | 327 | 21.1 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Power C-states enabled in BIOS

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.2

IBM BladeCenter HS22V (Intel Xeon E5503)

SPECint_base2006 = 20.5

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags (Continued)

```
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmpllr/usr3/alrahate/cpu2006.1.1.icl11.1/libicl11.1-64bit -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
429.mcf: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.2

IBM BladeCenter HS22V (Intel Xeon E5503)

SPECint_base2006 = 20.5

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
   403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
   458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
  -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
  -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
  -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
  -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
  -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -unroll12 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
  -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.2

IBM BladeCenter HS22V (Intel Xeon E5503)

SPECint_base2006 = 20.5

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
                -Wl,-z,muldefs
                -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:29:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2010.