



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

SPECfp®2006 = 31.9

SPECfp\_base2006 = 21.9

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

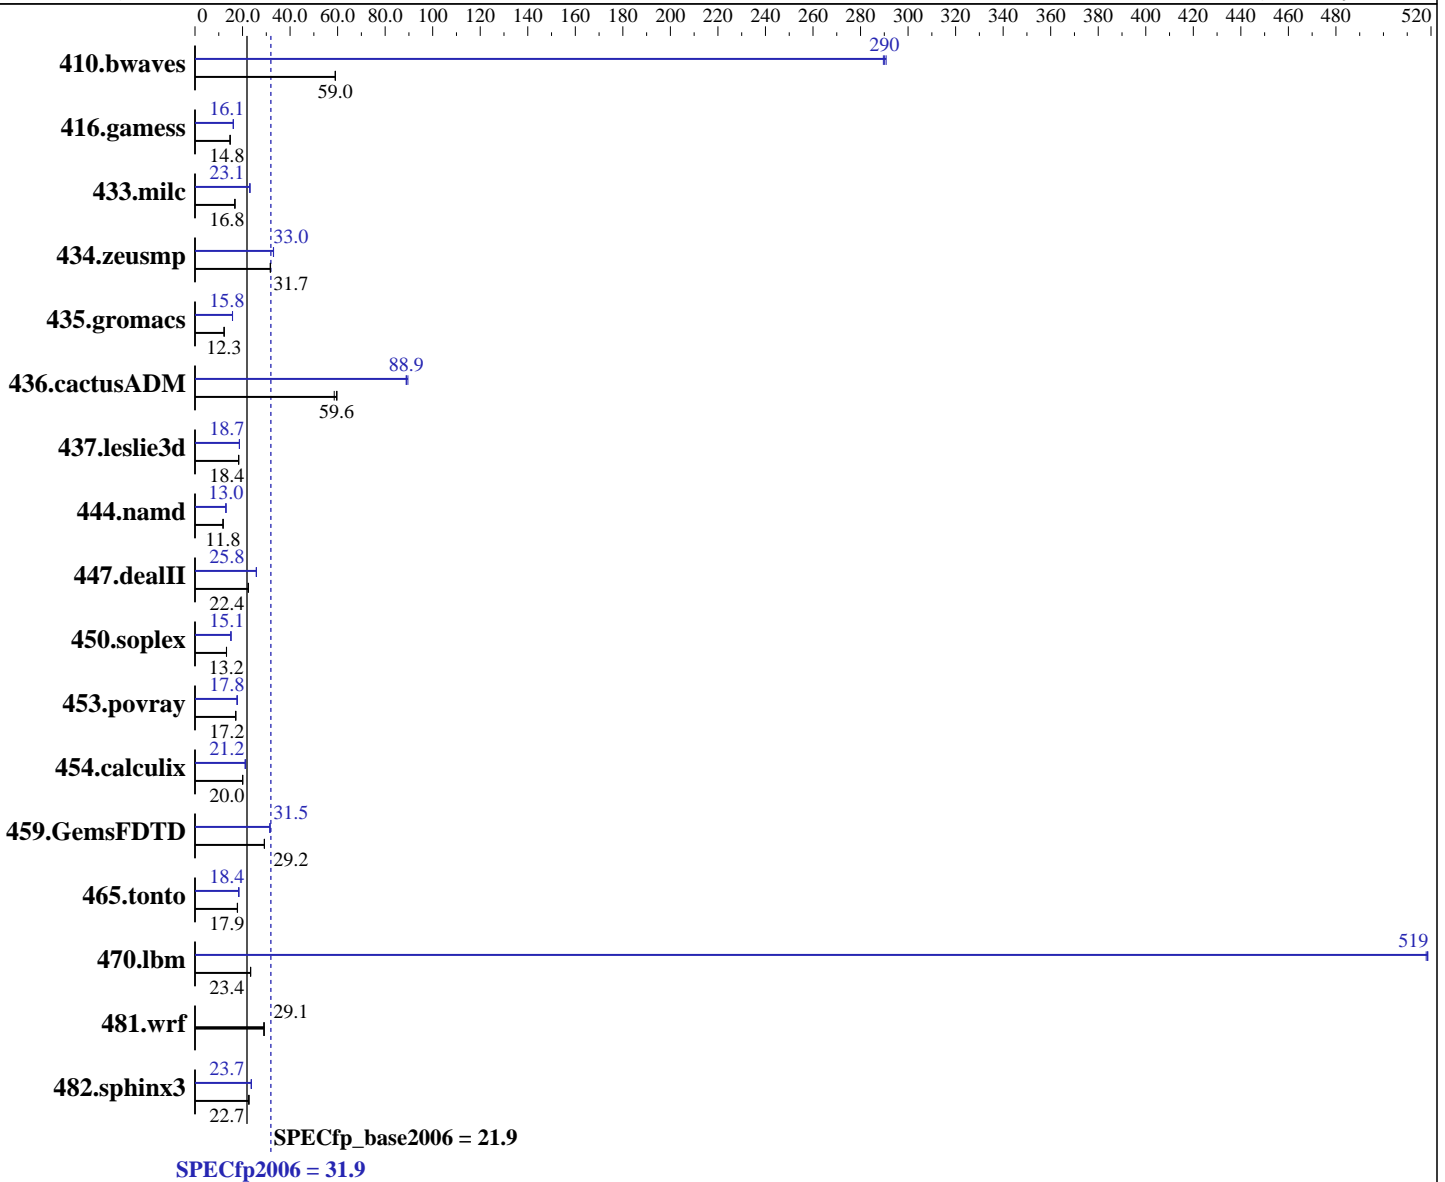

### Hardware

CPU Name: AMD Opteron 6134  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5,  
 Advanced Platform, Kernel 2.6.18-194.el5  
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

SPECfp2006 = 31.9

SPECfp\_base2006 = 21.9

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>230</u></b>	<b><u>59.0</u></b>	230	59.0	230	59.1	46.7	291	46.9	290	<b><u>46.8</u></b>	<b><u>290</u></b>
416.gamess	<b><u>1325</u></b>	<b><u>14.8</u></b>	1323	14.8	1326	14.8	1215	16.1	1213	16.1	<b><u>1214</u></b>	<b><u>16.1</u></b>
433.milc	<b><u>548</u></b>	<b><u>16.8</u></b>	545	16.8	548	16.7	397	23.1	<b><u>397</u></b>	<b><u>23.1</u></b>	398	23.0
434.zeusmp	<b><u>287</u></b>	<b><u>31.7</u></b>	287	31.7	286	31.8	<b><u>276</u></b>	<b><u>33.0</u></b>	276	33.0	275	33.1
435.gromacs	582	12.3	582	12.3	<b><u>582</u></b>	<b><u>12.3</u></b>	<b><u>453</u></b>	<b><u>15.8</u></b>	452	15.8	453	15.8
436.cactusADM	200	59.7	204	58.6	<b><u>201</u></b>	<b><u>59.6</u></b>	133	89.6	134	88.9	<b><u>134</u></b>	<b><u>88.9</u></b>
437.leslie3d	514	18.3	510	18.4	<b><u>512</u></b>	<b><u>18.4</u></b>	504	18.7	502	18.7	<b><u>502</u></b>	<b><u>18.7</u></b>
444.namd	<b><u>680</u></b>	<b><u>11.8</u></b>	680	11.8	677	11.9	<b><u>616</u></b>	<b><u>13.0</u></b>	616	13.0	616	13.0
447.dealII	510	22.4	<b><u>510</u></b>	<b><u>22.4</u></b>	509	22.5	443	25.8	<b><u>443</u></b>	<b><u>25.8</u></b>	442	25.9
450.soplex	630	13.2	628	13.3	<b><u>630</u></b>	<b><u>13.2</u></b>	<b><u>552</u></b>	<b><u>15.1</u></b>	553	15.1	550	15.2
453.povray	310	17.2	<b><u>310</u></b>	<b><u>17.2</u></b>	312	17.1	299	17.8	301	17.7	<b><u>300</u></b>	<b><u>17.8</u></b>
454.calculix	410	20.1	412	20.0	<b><u>412</u></b>	<b><u>20.0</u></b>	<b><u>389</u></b>	<b><u>21.2</u></b>	387	21.3	392	21.1
459.GemsFDTD	<b><u>363</u></b>	<b><u>29.2</u></b>	363	29.2	364	29.2	<b><u>336</u></b>	<b><u>31.5</u></b>	336	31.6	336	31.5
465.tonto	550	17.9	553	17.8	<b><u>551</u></b>	<b><u>17.9</u></b>	535	18.4	<b><u>535</u></b>	<b><u>18.4</u></b>	533	18.5
470.lbm	<b><u>587</u></b>	<b><u>23.4</u></b>	588	23.4	587	23.4	26.5	519	<b><u>26.5</u></b>	<b><u>519</u></b>	26.5	518
481.wrf	384	29.1	386	29.0	<b><u>384</u></b>	<b><u>29.1</u></b>	384	29.1	386	29.0	<b><u>384</u></b>	<b><u>29.1</u></b>
482.sphinx3	858	22.7	<b><u>859</u></b>	<b><u>22.7</u></b>	864	22.6	<b><u>822</u></b>	<b><u>23.7</u></b>	821	23.7	823	23.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=8000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

SPECfp2006 = 31.9

SPECfp\_base2006 = 21.9

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
openc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

SPECfp2006 = 31.9

SPECfp\_base2006 = 21.9

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Base Optimization Flags

### C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

### C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel\_overhead=10000  
-LNO:fusion\_peeling\_limit=0 -HP:bdt=2m:heap=2m

### Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo  
-LNO:parallel\_overhead=10000 -LNO:fusion\_peeling\_limit=0

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

SPECfp2006 = 31.9

SPECfp\_base2006 = 21.9

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-CG:compute\_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse\_cse\_regs=0  
-LNO:prefetch\_ahead=4 -CG:locs\_shallow\_depth=1  
-CG:cmp\_peep=on -CG:compute\_to=on -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -CG:load\_exe=0 -fno-exceptions  
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc\_alg=2  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -LNO:blocking=off  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

SPECfp2006 = 31.9

SPECfp\_base2006 = 21.9

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Optimization Flags (Continued)

410.bwaves (continued):

-LNO:ignore\_feedback=off -LNO:apo\_use\_feedback=on  
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off

-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll\_size=256

-LNO:prefetch\_ahead=4 -LNO:parallel\_overhead=32768  
-GRA:prioritize\_by\_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2

-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -Ofast -apo

-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -apo  
-LANG:heap\_allocation\_threshold=1000 -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch\_ahead=30

-CG:load\_exe=0 -CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2  
-CG:compute\_to=on -WOPT:unroll=2 -GRA:optimize\_boundary=on  
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6134

**SPECfp2006 = 31.9**

**SPECfp\_base2006 = 21.9**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:11:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 December 2010.