



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

SPECfp<sup>®</sup>2006 = 32.1

SPECfp\_base2006 = 22.2

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

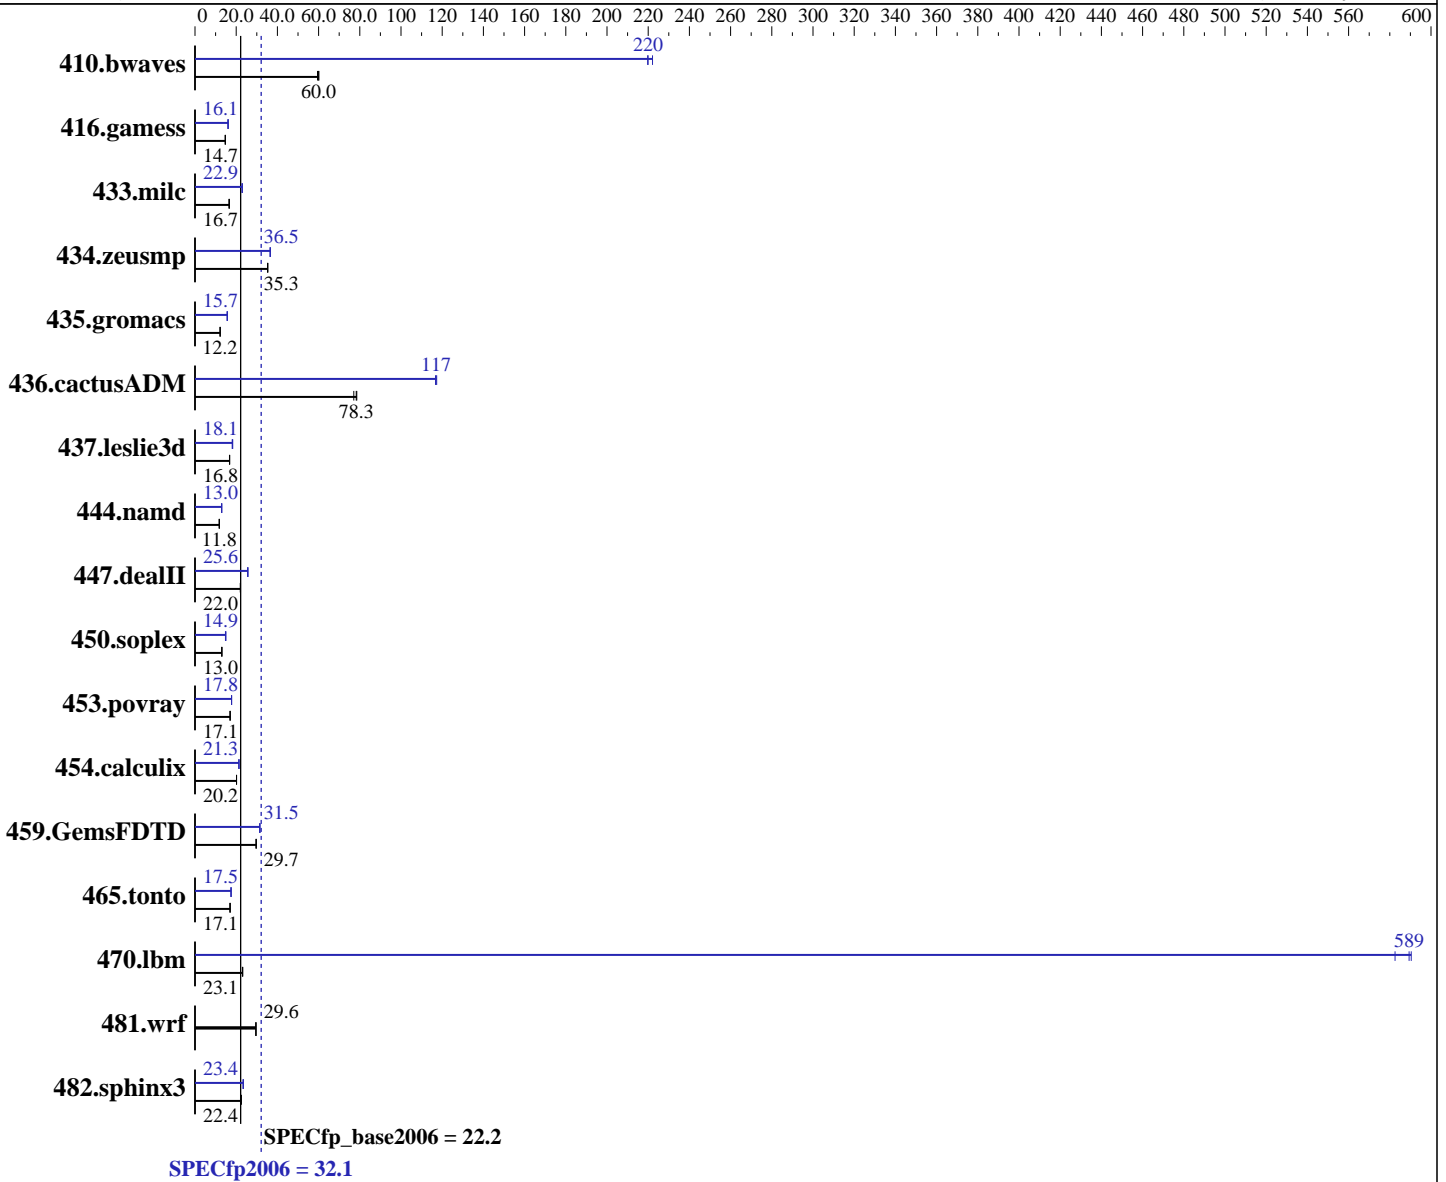

### Hardware

CPU Name: AMD Opteron 6176 SE  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5, Advanced Platform, Kernel 2.6.18-194.el5  
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

SPECfp2006 = 32.1

SPECfp\_base2006 = 22.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	229	59.5	<b><u>227</u></b>	<b><u>60.0</u></b>	226	60.1	61.2	222	<b><u>61.8</u></b>	<b><u>220</u></b>	61.8	220
416.gamess	1329	14.7	1333	14.7	<b><u>1330</u></b>	<b><u>14.7</u></b>	1227	16.0	<b><u>1217</u></b>	<b><u>16.1</u></b>	1213	16.1
433.milc	<b><u>551</u></b>	<b><u>16.7</u></b>	556	16.5	551	16.7	400	22.9	401	22.9	<b><u>401</u></b>	<b><u>22.9</u></b>
434.zeusmp	258	35.2	258	35.3	<b><u>258</u></b>	<b><u>35.3</u></b>	249	36.5	249	36.5	<b><u>249</u></b>	<b><u>36.5</u></b>
435.gromacs	585	12.2	<b><u>585</u></b>	<b><u>12.2</u></b>	585	12.2	<b><u>456</u></b>	<b><u>15.7</u></b>	456	15.6	455	15.7
436.cactusADM	152	78.5	<b><u>153</u></b>	<b><u>78.3</u></b>	155	77.1	102	117	<b><u>102</u></b>	<b><u>117</u></b>	102	117
437.leslie3d	562	16.7	<b><u>561</u></b>	<b><u>16.8</u></b>	557	16.9	<b><u>518</u></b>	<b><u>18.1</u></b>	519	18.1	513	18.3
444.namd	<b><u>680</u></b>	<b><u>11.8</u></b>	679	11.8	681	11.8	618	13.0	<b><u>619</u></b>	<b><u>13.0</u></b>	620	12.9
447.dealII	520	22.0	518	22.1	<b><u>519</u></b>	<b><u>22.0</u></b>	445	25.7	<b><u>447</u></b>	<b><u>25.6</u></b>	447	25.6
450.soplex	639	13.0	642	13.0	<b><u>640</u></b>	<b><u>13.0</u></b>	<b><u>561</u></b>	<b><u>14.9</u></b>	555	15.0	564	14.8
453.povray	311	17.1	<b><u>312</u></b>	<b><u>17.1</u></b>	313	17.0	<b><u>300</u></b>	<b><u>17.8</u></b>	299	17.8	300	17.7
454.calculix	<b><u>409</u></b>	<b><u>20.2</u></b>	409	20.2	409	20.1	387	21.3	387	21.3	<b><u>387</u></b>	<b><u>21.3</u></b>
459.GemsFDTD	<b><u>357</u></b>	<b><u>29.7</u></b>	358	29.7	357	29.7	<b><u>337</u></b>	<b><u>31.5</u></b>	337	31.5	338	31.4
465.tonto	580	17.0	576	17.1	<b><u>577</u></b>	<b><u>17.1</u></b>	561	17.5	<b><u>561</u></b>	<b><u>17.5</u></b>	564	17.4
470.lbm	593	23.2	<b><u>594</u></b>	<b><u>23.1</u></b>	597	23.0	23.6	583	<b><u>23.3</u></b>	<b><u>589</u></b>	23.3	590
481.wrf	377	29.6	378	29.5	<b><u>378</u></b>	<b><u>29.6</u></b>	377	29.6	378	29.5	<b><u>378</u></b>	<b><u>29.6</u></b>
482.sphinx3	868	22.5	<b><u>868</u></b>	<b><u>22.4</u></b>	871	22.4	<b><u>832</u></b>	<b><u>23.4</u></b>	836	23.3	829	23.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=8000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

SPECfp2006 = 32.1

SPECfp\_base2006 = 22.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

SPECfp2006 = 32.1

SPECfp\_base2006 = 22.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Base Optimization Flags

### C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

### C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel\_overhead=10000  
-LNO:fusion\_peeling\_limit=0 -HP:bdt=2m:heap=2m

### Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo  
-LNO:parallel\_overhead=10000 -LNO:fusion\_peeling\_limit=0

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

SPECfp2006 = 32.1

SPECfp\_base2006 = 22.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-CG:compute\_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse\_cse\_regs=0  
-LNO:prefetch\_ahead=4 -CG:locs\_shallow\_depth=1  
-CG:cmp\_peep=on -CG:compute\_to=on -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -CG:load\_exe=0 -fno-exceptions  
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc\_alg=2  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -LNO:blocking=off  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

SPECfp2006 = 32.1

SPECfp\_base2006 = 22.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Optimization Flags (Continued)

410.bwaves (continued):

-LNO:ignore\_feedback=off -LNO:apo\_use\_feedback=on  
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off

-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll\_size=256

-LNO:prefetch\_ahead=4 -LNO:parallel\_overhead=32768  
-GRA:prioritize\_by\_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2

-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -Ofast -apo

-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -apo  
-LANG:heap\_allocation\_threshold=1000 -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch\_ahead=30

-CG:load\_exe=0 -CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2  
-CG:compute\_to=on -WOPT:unroll=2 -GRA:optimize\_boundary=on  
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6176 SE

**SPECfp2006 = 32.1**

**SPECfp\_base2006 = 22.2**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Sep-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:04:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 December 2010.