



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp®2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

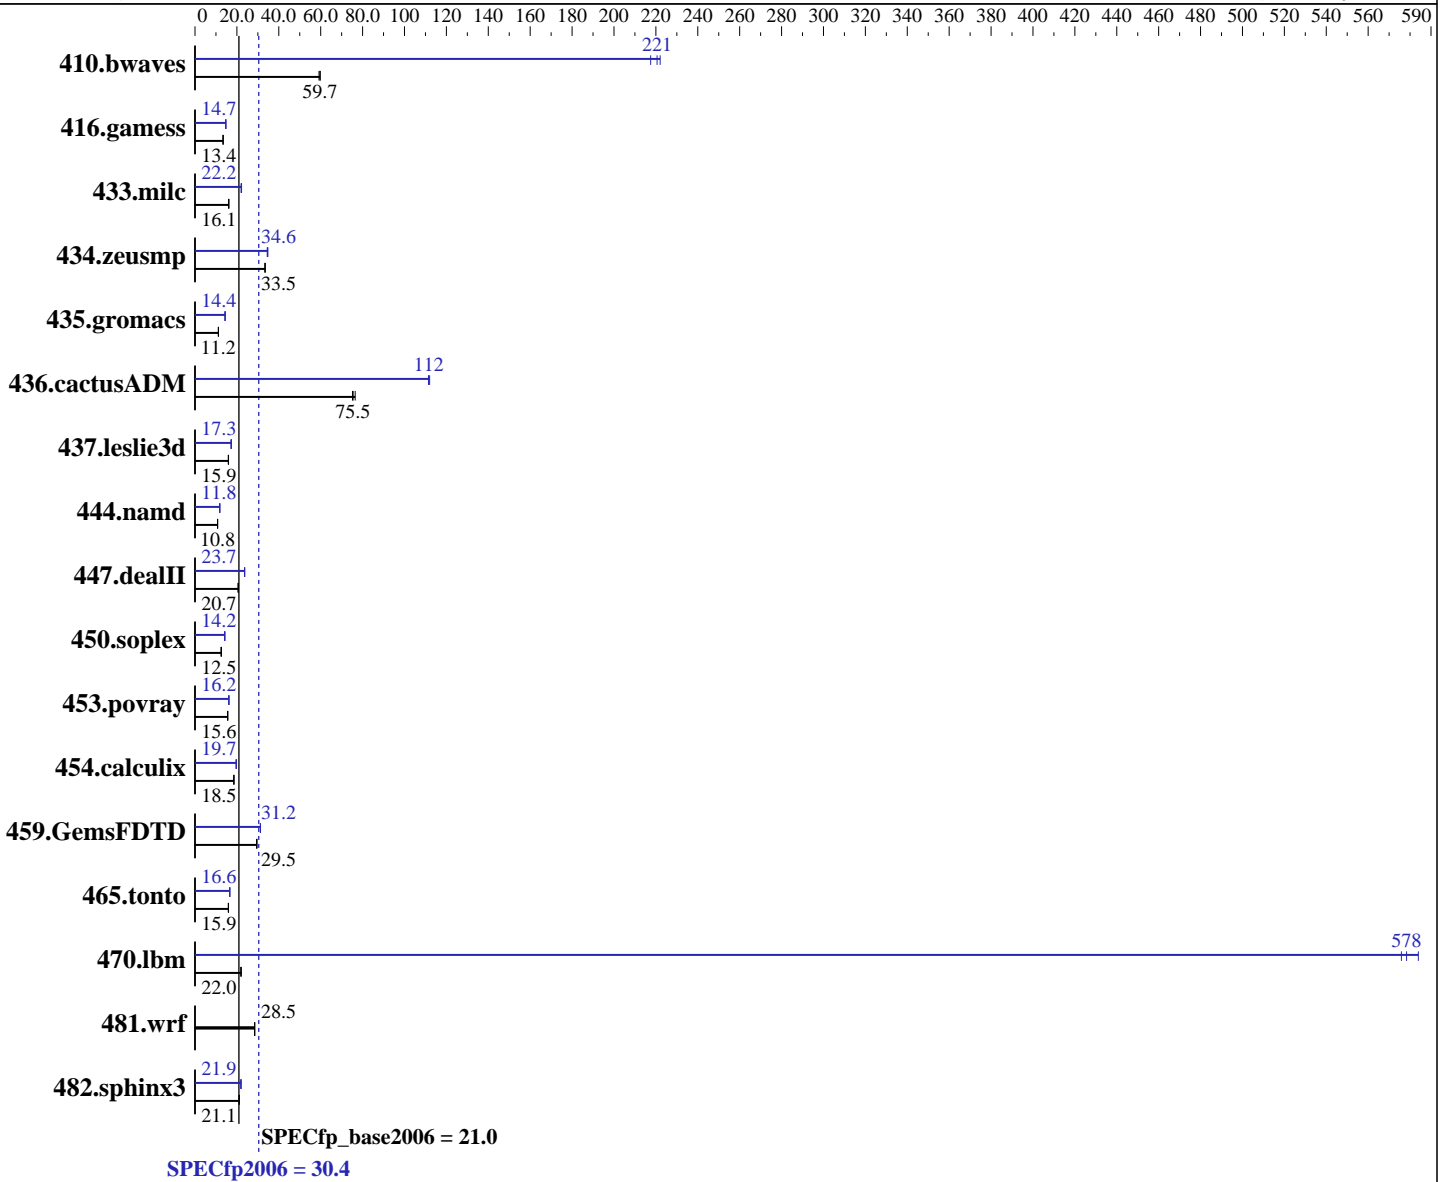

Hardware

CPU Name: AMD Opteron 6172
 CPU Characteristics: 2100
 CPU MHz: Integrated
 FPU: 48 cores, 4 chips, 12 cores/chip
 CPU(s) enabled: 2,4 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Software

Operating System: Red Hat Enterprise Linux Server release 5.5, Advanced Platform, Kernel 2.6.18-194.el5
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	230	59.2	228	59.7	228	59.7	61.6	221	62.5	218	61.2	222
416.gamess	1459	13.4	1458	13.4	1460	13.4	1329	14.7	1334	14.7	1332	14.7
433.milc	571	16.1	569	16.1	570	16.1	417	22.0	413	22.2	414	22.2
434.zeusmp	272	33.5	273	33.4	272	33.5	263	34.6	264	34.5	262	34.8
435.gromacs	638	11.2	639	11.2	639	11.2	497	14.4	497	14.4	497	14.4
436.cactusADM	156	76.5	159	75.2	158	75.5	107	112	107	111	107	112
437.leslie3d	590	15.9	590	15.9	587	16.0	546	17.2	544	17.3	541	17.4
444.namd	745	10.8	745	10.8	742	10.8	678	11.8	678	11.8	679	11.8
447.dealII	554	20.7	555	20.6	554	20.7	483	23.7	483	23.7	483	23.7
450.soplex	665	12.5	665	12.5	667	12.5	587	14.2	586	14.2	588	14.2
453.povray	342	15.5	340	15.6	340	15.6	328	16.2	328	16.2	331	16.1
454.calculix	446	18.5	443	18.6	445	18.5	418	19.8	421	19.6	418	19.7
459.GemsFDTD	360	29.5	360	29.5	359	29.5	340	31.2	340	31.2	340	31.2
465.tonto	618	15.9	615	16.0	617	15.9	593	16.6	591	16.6	595	16.5
470.lbm	625	22.0	628	21.9	623	22.1	23.8	578	23.9	576	23.5	584
481.wrf	392	28.5	393	28.4	391	28.6	392	28.5	393	28.4	391	28.6
482.sphinx3	923	21.1	925	21.1	921	21.2	891	21.9	887	22.0	888	21.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=8000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
-CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
-LNO:prefetch=3 -LNO:prefetch_ahead=5

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off

-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256

-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-GRA:prioritize_by_density=on -m3dnw -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2

-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -Ofast -apo

-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -apo
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30

-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6172

SPECfp2006 = 30.4

SPECfp_base2006 = 21.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:12:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 December 2010.