



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu SPARC Enterprise M8000

SPECfp[®]2006 = 41.8

SPECfp_base2006 = 33.1

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Oracle Corporation

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

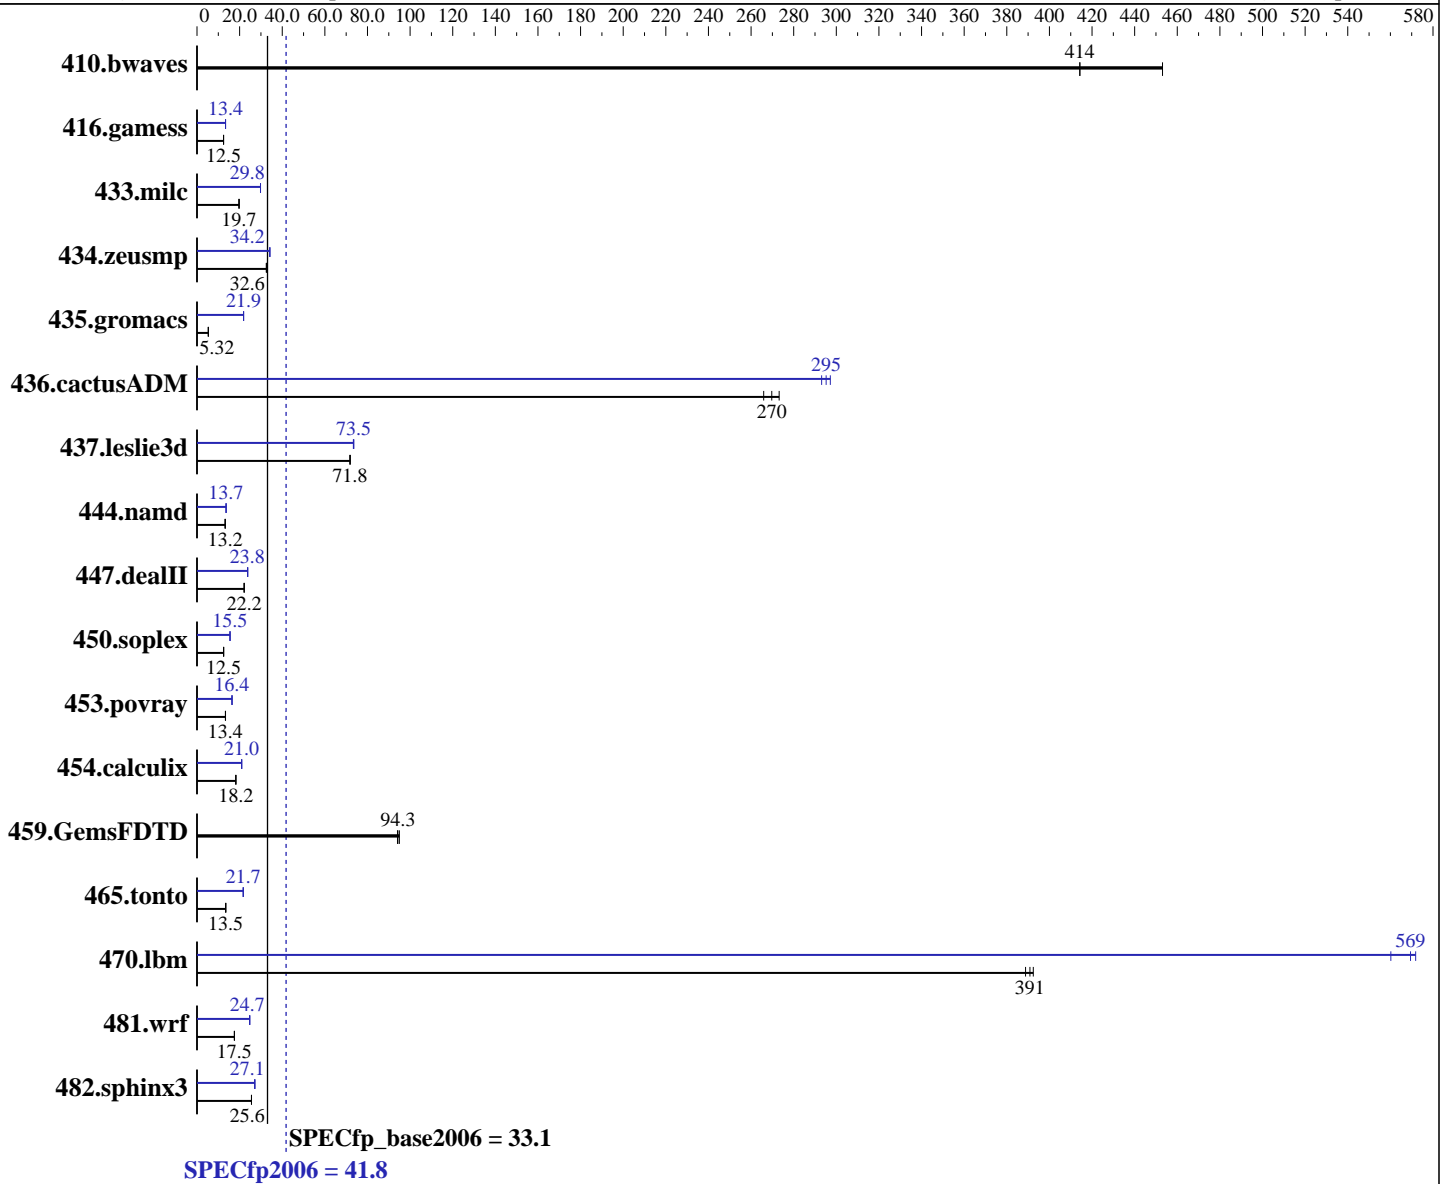

Hardware

CPU Name: SPARC64 VII+
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip

Continued on next page

Software

Operating System: Oracle Solaris 10 9/10
 Compiler: Oracle Solaris Studio 12.2
 Auto Parallel: Yes
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp2006 = 41.8
SPECfp_base2006 = 33.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 512 GB (128 x 4 GB, 8-way interleaved)
Disk Subsystem: 698 GB mirrored partition on
12 x 146 GB 15K RPM SAS disks
in each of 2 StorageTek 2530 Array
(24 total disk, 12 in each array)
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	30.0	453	32.8	414	<u>32.8</u>	<u>414</u>	30.0	453	32.8	414	<u>32.8</u>	<u>414</u>
416.gamess	1570	12.5	<u>1571</u>	<u>12.5</u>	1571	12.5	1462	13.4	<u>1462</u>	<u>13.4</u>	1462	13.4
433.milc	<u>465</u>	<u>19.7</u>	464	19.8	466	19.7	308	29.8	<u>308</u>	<u>29.8</u>	308	29.8
434.zeusmp	279	32.6	<u>279</u>	<u>32.6</u>	279	32.6	266	34.2	<u>266</u>	<u>34.2</u>	266	34.1
435.gromacs	1343	5.31	<u>1342</u>	<u>5.32</u>	1340	5.33	327	21.9	327	21.9	<u>327</u>	<u>21.9</u>
436.cactusADM	<u>44.3</u>	<u>270</u>	44.9	266	43.7	273	40.2	297	<u>40.5</u>	<u>295</u>	40.8	293
437.leslie3d	131	71.8	<u>131</u>	<u>71.8</u>	131	71.9	128	73.6	<u>128</u>	<u>73.5</u>	128	73.4
444.namd	<u>606</u>	<u>13.2</u>	606	13.2	606	13.2	587	13.7	<u>587</u>	<u>13.7</u>	587	13.7
447.dealII	516	22.2	<u>516</u>	<u>22.2</u>	517	22.1	481	23.8	<u>481</u>	<u>23.8</u>	481	23.8
450.soplex	667	12.5	668	12.5	<u>667</u>	<u>12.5</u>	538	15.5	538	15.5	<u>538</u>	<u>15.5</u>
453.povray	398	13.4	<u>398</u>	<u>13.4</u>	399	13.3	323	16.5	324	16.4	<u>324</u>	<u>16.4</u>
454.calculix	453	18.2	452	18.2	<u>453</u>	<u>18.2</u>	393	21.0	<u>394</u>	<u>21.0</u>	394	21.0
459.GemsFDTD	<u>113</u>	<u>94.3</u>	112	95.0	113	94.1	<u>113</u>	<u>94.3</u>	112	95.0	113	94.1
465.tonto	<u>729</u>	<u>13.5</u>	731	13.5	729	13.5	<u>453</u>	<u>21.7</u>	453	21.7	454	21.7
470.lbm	<u>35.2</u>	<u>391</u>	35.0	392	35.3	389	24.0	572	24.5	560	<u>24.1</u>	<u>569</u>
481.wrf	<u>636</u>	<u>17.5</u>	637	17.5	636	17.6	452	24.7	<u>452</u>	<u>24.7</u>	451	24.7
482.sphinx3	762	25.6	<u>762</u>	<u>25.6</u>	763	25.6	719	27.1	719	27.1	<u>719</u>	<u>27.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08

Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp2006 = 41.8
SPECfp_base2006 = 33.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

```
/etc/system parameters
autoup=600
    Causes pages older than the listed number of seconds to
    be written by fsflush.
tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
lpg_alloc_prefer=1
    Indicates that extra effort should be taken to ensure
    that pages are created in the nearby lgroup (NUMA location).
The "webconsole" service was turned off using
svcadm disable webconsole
The system had 75 GB of swap space.
```

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M8000 server from Oracle. The SPARC Enterprise M8000 server from Oracle and from Fujitsu are electrically equivalent.

General Notes

Environment variables set by runspec before the start of the run:

```
OMP_NUM_THREADS = "64"
SUNW_MP_PROCBIND = "127 125 123 121 119 117 115 113 111 109 107 105 103
101 99 97 95 93 91 89 87 85 83 81 79 77 75 73 71 69 67 65 63 61 59 57 55
53 51 49 47 45 43 41 39 37 35 33 31 29 27 25 23 21 19 17 15 13 11 9 7 5
3 1 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46
48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94
96 98 100 102 104 106 108 110 112 114 116 118 120 122 124 126"
SUNW_MP_THR_IDLE = "SPIN"
```

447.dealIII (peak): "apache_stdctx_4_2_1" src.alt was used.
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp2006 = 41.8
SPECfp_base2006 = 33.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

General Notes (Continued)

447.dealIII (base): "apache_stdccx_4_2_1" src.alt was used.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xpagesize=4M -xipo=2 -xprefetch=latx:2
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access -xautopar
-xreduction

C++ benchmarks:
-xdepend -fast -fma=fused -xpagesize=4M -xipo=2 -xprefetch=latx:2
-xprefetch_level=2 -xalias_level=compatible -library=no%Cstd
-I/export/bmk2/apache/stdccx-4.2.1/include
-I/export/bmk2/apache/stdccx-4.2.1/build/include
-L/export/bmk2/apache/stdccx-4.2.1/build/lib
-R/export/bmk2/apache/stdccx-4.2.1/build/lib -lstd8d

Fortran benchmarks:
-fast -fma=fused -xpagesize=4M -xipo=2 -xprefetch=latx:2
-xprefetch_level=2 -xautopar -xreduction

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xpagesize=4M -xipo=2
-xprefetch=latx:2 -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access -xautopar -xreduction
-xprefetch_level=2

Base Other Flags

C benchmarks:
-xjobs=32 -V -#

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp2006 = 41.8
SPECfp_base2006 = 33.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Other Flags (Continued)

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -fma=fused -xpagesize=4M -xipo=2 -xprefetch_level=2
-W2,-Ainline:rs=400 -xalias_level=std -xautopar -xreduction
-W2,-Aparallel:nthreads=8

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xautopar -xreduction
-W2,-Aparallel:nthreads=128 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -fma=fused
-xautopar -xreduction -xalias_level=std

C++ benchmarks:

444.namd: -xdepend -fast -fma=fused -xpagesize=4M -xalias_level=any
-library=stlport4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp2006 = 41.8
SPECfp_base2006 = 33.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

447.dealIII: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xprefetch_level=2 -xrestrict
-xalias_level=compatible -library=no%Cstd
-I/export/bmk2/apache/stdcxx-4.2.1/include
-I/export/bmk2/apache/stdcxx-4.2.1/build/include
-L/export/bmk2/apache/stdcxx-4.2.1/build/lib
-R/export/bmk2/apache/stdcxx-4.2.1/build/lib -lst8d

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xprefetch_level=2 -xalias_level=compatible
-xrestrict -xprefetch_auto_type=indirect_array_access
-library=stlport4 -Qoption cg -Qlp-ol=1
-Qoption cg -Qlp-it=3 -Qoption cg -Qlp-imb=1
-Qoption iropt -Apf:pdl=3

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xrestrict -xalias_level=compatible
-library=stlport4

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xprefetch_level=3

434.zeusmp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xautopar -xreduction

437.leslie3d: Same as 434.zeusmp

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -fma=fused -xautopar -xreduction
-Qoption iropt -Aparallel:nthreads=4 -lumem

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xipo=2 -xpagesize=4M -xautopar -xreduction
-Qoption iropt -Aparallel:nthreads=4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp2006 = 41.8
SPECfp_base2006 = 33.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

```

436.cactusADM: -xprofile=collect:./feedback(pass 1)
                -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
                -fma=fused -xpagesize=4M -xipo=2 -xautopar -xreduction

454.calculix: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
              -fma=fused -xpagesize=4M -xipo=2 -xprefetch_level=3
              -xprefetch=latx:3.0 -xalias_level=std -xautopar -xreduction
              -Qoption iropt -Aparallel:nthreads=4

481.wrf: -fast(cc) -fast(f90) -fma=fused -xpagesize=4M -xipo=2
         -xprefetch_level=3 -xunroll=8 -xautopar -xreduction
         -Qoption iropt -Aparallel:nthreads=12

```

Peak Other Flags

C benchmarks:
-xjobs=32 -V -#

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:44:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.