



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5690, 3.47 GHz

**SPECfp®\_rate2006 = 274**

**SPECfp\_rate\_base2006 = 267**

CPU2006 license: 19


Test date: Jan-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Nov-2010

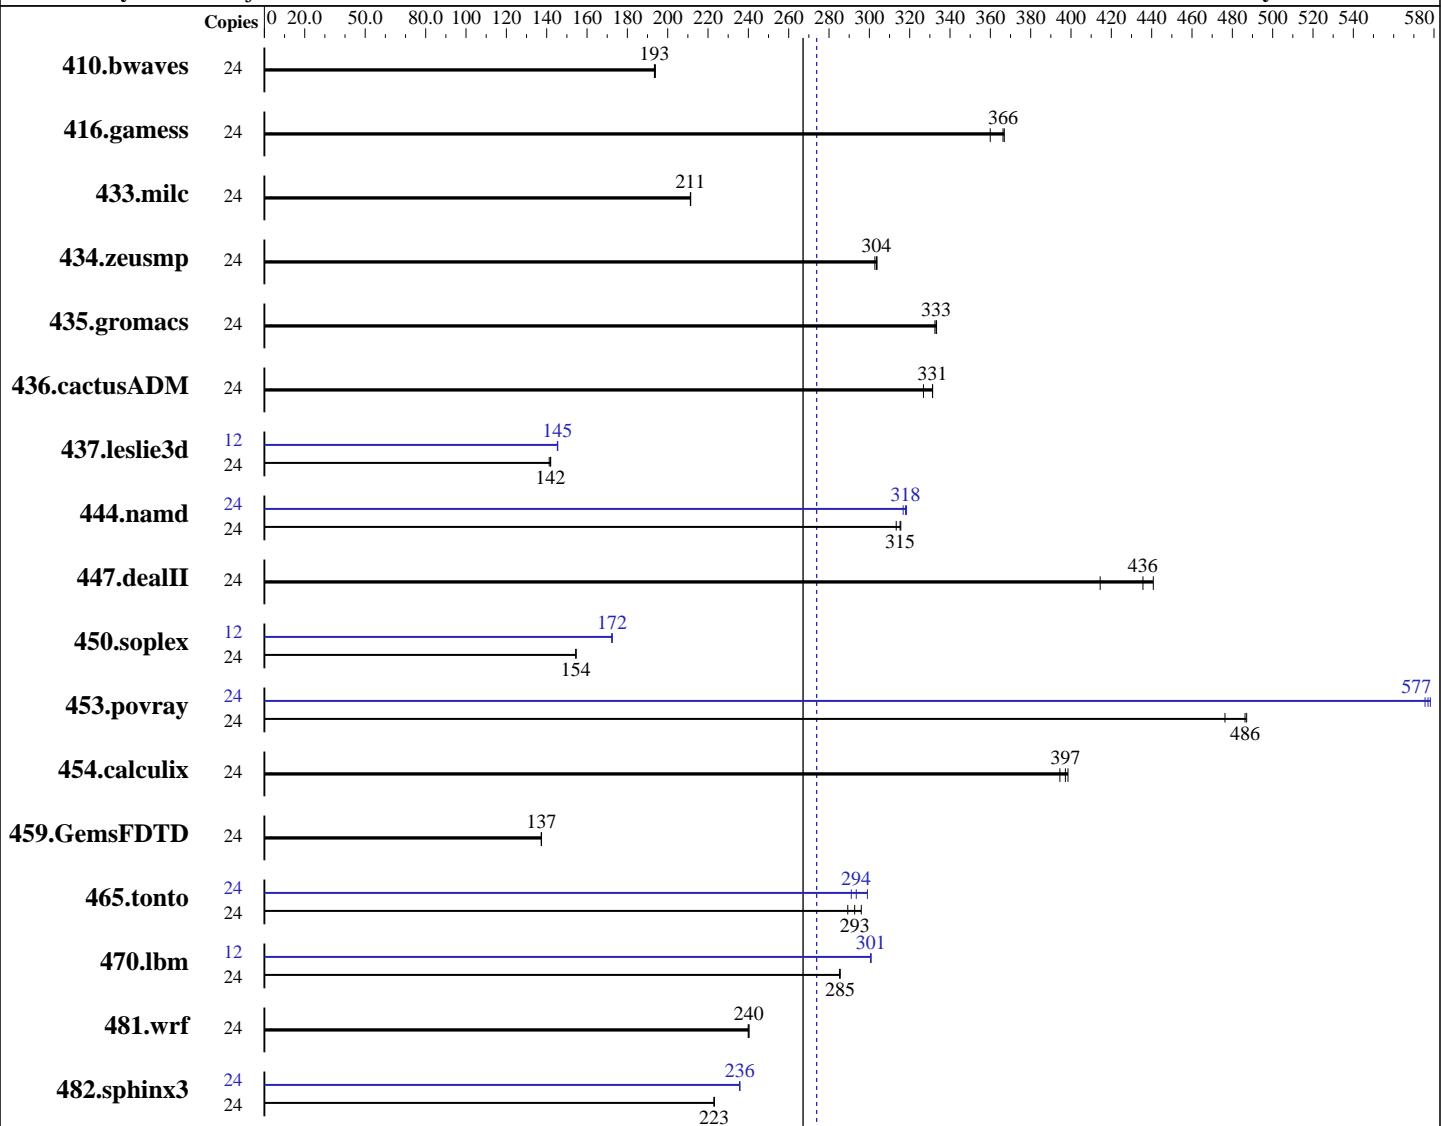

### Hardware

CPU Name: Intel Xeon X5690  
CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
CPU MHz: 3467  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.0.082 Build 20101006  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5690, 3.47 GHz

**SPECfp\_rate2006 = 274**

CPU2006 license: 19

Test date: Jan-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Nov-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: --

Peak Pointers: 32/64-bit  
 Other Software: none

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1682	194	<b>1686</b>	<b>193</b>	1686	193	24	1682	194	<b>1686</b>	<b>193</b>	1686	193
416.gamess	24	<b>1283</b>	<b>366</b>	1306	360	1281	367	24	<b>1283</b>	<b>366</b>	1306	360	1281	367
433.milc	24	<b>1042</b>	<b>211</b>	1043	211	1042	211	24	<b>1042</b>	<b>211</b>	1043	211	1042	211
434.zeusmp	24	721	303	719	304	<b>720</b>	<b>304</b>	24	721	303	719	304	<b>720</b>	<b>304</b>
435.gromacs	24	515	333	<b>514</b>	<b>333</b>	514	333	24	515	333	<b>514</b>	<b>333</b>	514	333
436.cactusADM	24	<b>866</b>	<b>331</b>	865	331	878	327	24	<b>866</b>	<b>331</b>	865	331	878	327
437.leslie3d	24	<b>1589</b>	<b>142</b>	1589	142	1597	141	12	<b>776</b>	<b>145</b>	775	145	<b>776</b>	<b>145</b>
444.namd	24	614	313	<b>611</b>	<b>315</b>	610	316	24	604	318	608	317	<b>605</b>	<b>318</b>
447.dealII	24	662	414	<b>630</b>	<b>436</b>	623	441	24	662	414	<b>630</b>	<b>436</b>	623	441
450.soplex	24	<b>1296</b>	<b>154</b>	1296	154	1295	155	12	<b>580</b>	<b>172</b>	581	172	580	173
453.povray	24	<b>263</b>	<b>486</b>	268	476	262	487	24	222	576	<b>221</b>	<b>577</b>	221	578
454.calculix	24	497	398	<b>498</b>	<b>397</b>	502	394	24	497	398	<b>498</b>	<b>397</b>	502	394
459.GemsFDTD	24	1853	137	1855	137	<b>1853</b>	<b>137</b>	24	1853	137	1855	137	<b>1853</b>	<b>137</b>
465.tonto	24	<b>807</b>	<b>293</b>	798	296	816	289	24	790	299	<b>805</b>	<b>294</b>	811	291
470.lbm	24	1155	285	<b>1155</b>	<b>285</b>	1156	285	12	<b>548</b>	<b>301</b>	548	301	548	301
481.wrf	24	1116	240	1117	240	<b>1116</b>	<b>240</b>	24	1116	240	1117	240	<b>1116</b>	<b>240</b>
482.sphinx3	24	2096	223	2098	223	<b>2097</b>	<b>223</b>	24	<b>1984</b>	<b>236</b>	1985	236	1984	236

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
 Large pages were not enabled for this run

## Platform Notes

BIOS configuration:  
 Data Reuse Optimization = Disable  
 Performance/Power Setting = Traditional



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5690, 3.47 GHz

**SPECfp\_rate2006 = 274**

CPU2006 license: 19

Test date: Jan-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Nov-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

    -xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

C++ benchmarks:

    -xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5690, 3.47 GHz

**SPECfp\_rate2006 = 274**

CPU2006 license: 19

**Test date:** Jan-2011

Test sponsor: Fujitsu

**Hardware Availability:** Feb-2011

Tested by: Fujitsu

**Software Availability:** Nov-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5690, 3.47 GHz

**SPECfp\_rate2006 = 274**

CPU2006 license: 19

Test date: Jan-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Nov-2010

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -auto-ilp32

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xsse4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbf/ -Wl,-melf\_x86\_64 -Wl,-hugetlbf-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5690, 3.47 GHz

**SPECfp\_rate2006 = 274**

CPU2006 license: 19

**Test date:** Jan-2011

Test sponsor: Fujitsu

**Hardware Availability:** Feb-2011

Tested by: Fujitsu

**Software Availability:** Nov-2010

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:00:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 February 2011.