



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint<sup>®</sup>\_rate2006 = 397

PRIMERGY RX200 S6, Intel Xeon X5675, 3.07 GHz

SPECint\_rate\_base2006 = 372

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2010

Hardware Availability: Jul-2010

Software Availability: Nov-2010

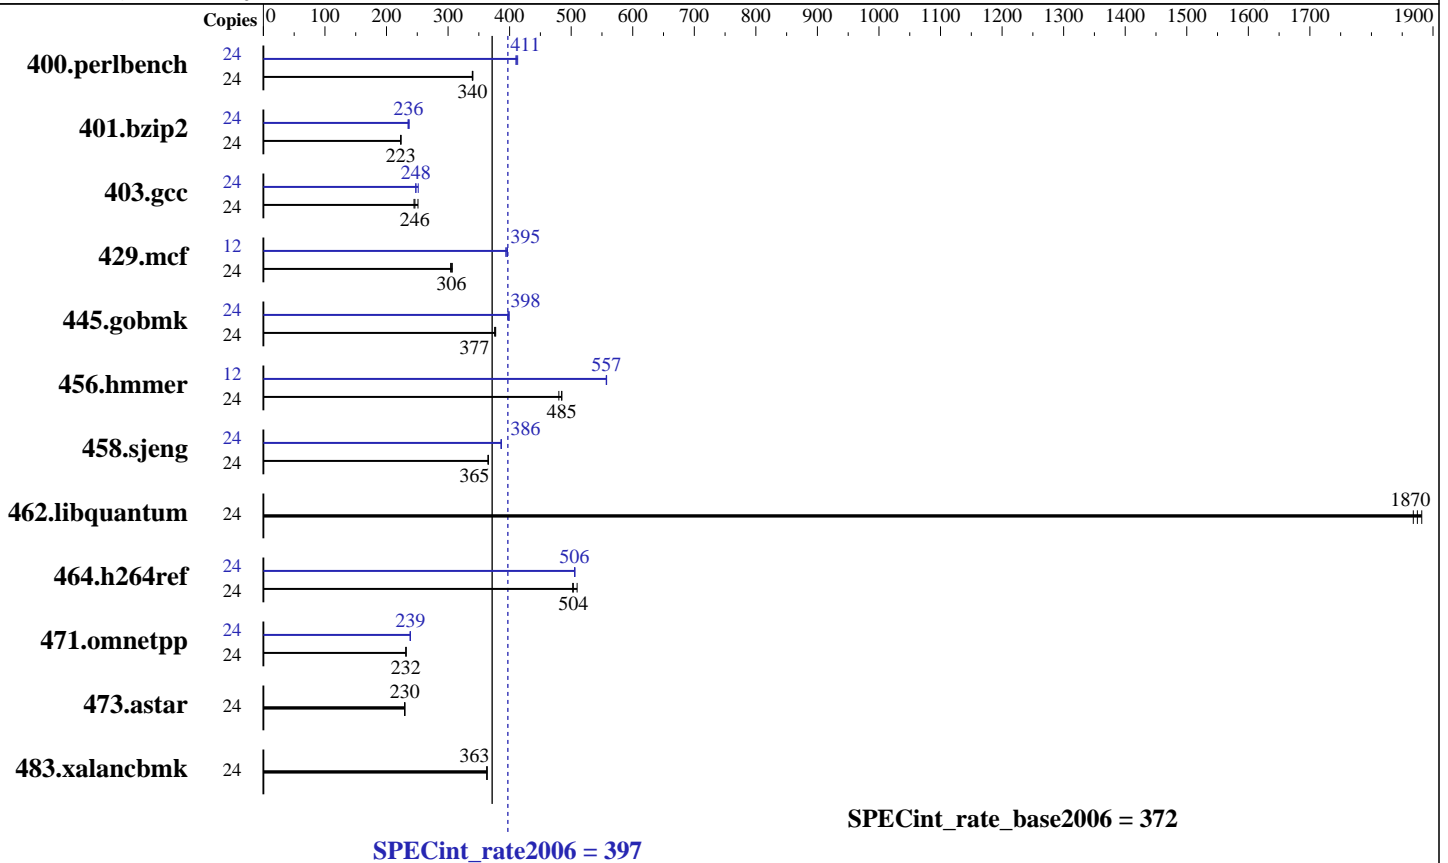

### Hardware

CPU Name: Intel Xeon X5675  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.47 GHz  
 CPU MHz: 3067  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: --

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.0.082 Build 20101006  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 397

PRIMERGY RX200 S6, Intel Xeon X5675, 3.07 GHz

SPECint\_rate\_base2006 = 372

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Dec-2010  
Hardware Availability: Jul-2010  
Software Availability: Nov-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>690</b>	<b>340</b>	689	340	691	339	24	<b>570</b>	<b>411</b>	568	413	572	410
401.bzip2	24	1036	223	<b>1037</b>	<b>223</b>	1038	223	24	978	237	986	235	<b>982</b>	<b>236</b>
403.gcc	24	769	251	<b>785</b>	<b>246</b>	790	245	24	<b>780</b>	<b>248</b>	768	252	780	248
429.mcf	24	713	307	<b>716</b>	<b>306</b>	720	304	12	276	397	278	394	<b>277</b>	<b>395</b>
445.gobmk	24	667	377	<b>669</b>	<b>377</b>	670	376	24	<b>632</b>	<b>398</b>	630	399	634	397
456.hammer	24	462	485	467	480	<b>462</b>	<b>485</b>	12	201	558	<b>201</b>	<b>557</b>	201	557
458.sjeng	24	795	365	<b>795</b>	<b>365</b>	795	365	24	751	387	<b>752</b>	<b>386</b>	752	386
462.libquantum	24	266	1870	264	1880	<b>265</b>	<b>1870</b>	24	266	1870	264	1880	<b>265</b>	<b>1870</b>
464.h264ref	24	1042	510	1057	502	<b>1055</b>	<b>504</b>	24	1049	506	1051	505	<b>1050</b>	<b>506</b>
471.omnetpp	24	648	232	<b>648</b>	<b>232</b>	647	232	24	628	239	629	238	<b>628</b>	<b>239</b>
473.astar	24	<b>734</b>	<b>230</b>	733	230	735	229	24	<b>734</b>	<b>230</b>	733	230	735	229
483.xalancbmk	24	<b>456</b>	<b>363</b>	456	363	456	363	24	<b>456</b>	<b>363</b>	456	363	456	363

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
Large pages were not enabled for this run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 397**

PRIMERGY RX200 S6, Intel Xeon X5675, 3.07 GHz

**SPECint\_rate\_base2006 = 372**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Dec-2010  
**Hardware Availability:** Jul-2010  
**Software Availability:** Nov-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 397

PRIMERGY RX200 S6, Intel Xeon X5675, 3.07 GHz

SPECint\_rate\_base2006 = 372

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2010

Hardware Availability: Jul-2010

Software Availability: Nov-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 397**

PRIMERGY RX200 S6, Intel Xeon X5675, 3.07 GHz

**SPECint\_rate\_base2006 = 372**

**CPU2006 license:** 19

**Test date:** Dec-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2010

**Tested by:** Fujitsu

**Software Availability:** Nov-2010

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 17:01:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 February 2011.