



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®2006 = **22.3**

ProLiant SL165s G7  
(2.30 GHz AMD Opteron 6176)

SPECint\_base2006 = **17.5**

CPU2006 license: 3


Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2010

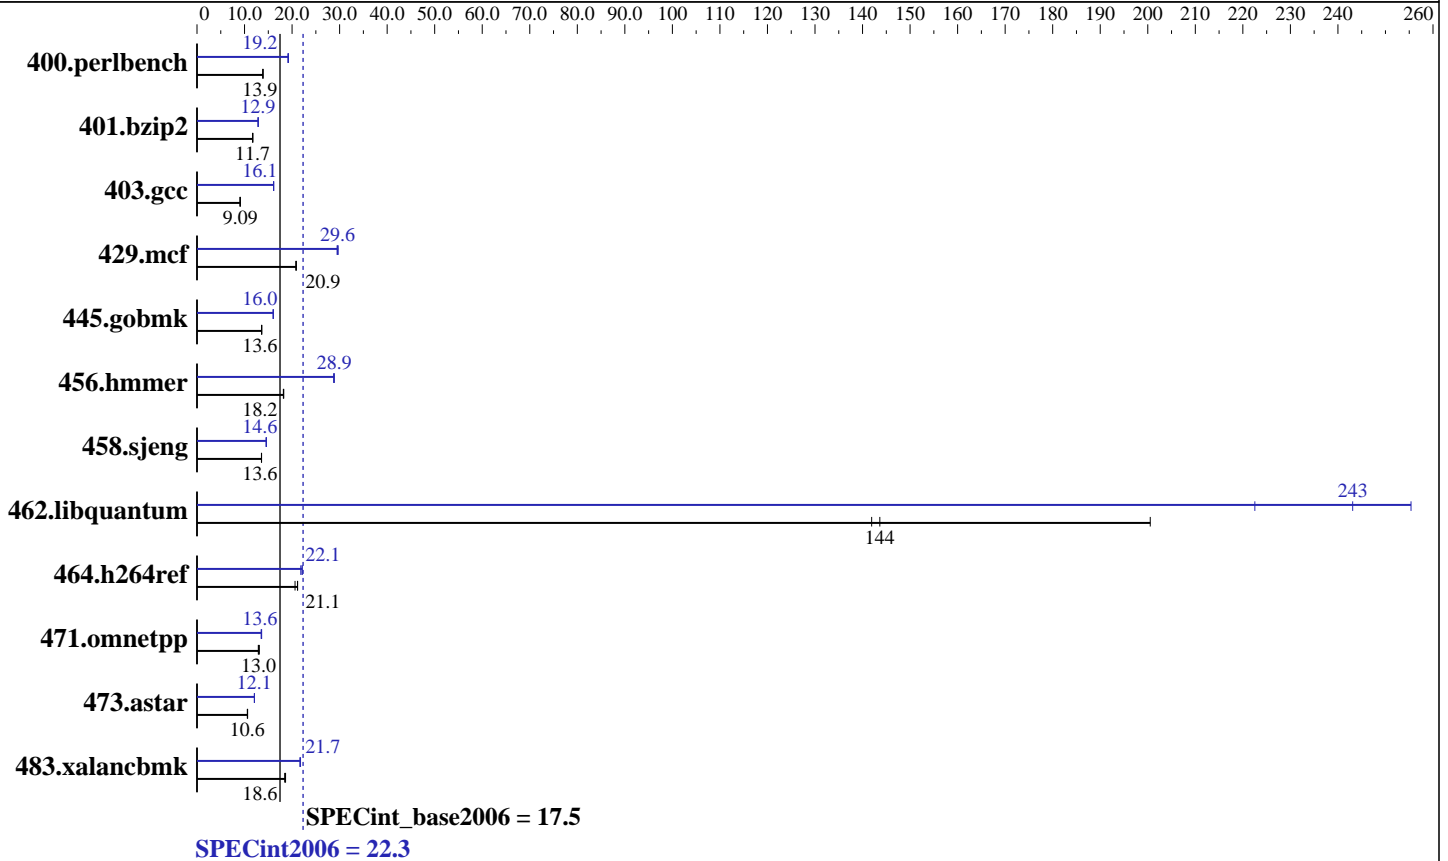

### Hardware

CPU Name: AMD Opteron 6176  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 120 GB 10 K SSD  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1  
 Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint2006 = **22.3**

ProLiant SL165s G7  
(2.30 GHz AMD Opteron 6176)

SPECint\_base2006 = **17.5**

CPU2006 license: 3

Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	705	13.8	<b>704</b>	<b>13.9</b>	704	13.9	<b>508</b>	<b>19.2</b>	511	19.1	508	19.2
401.bzip2	<b>823</b>	<b>11.7</b>	823	11.7	823	11.7	749	12.9	<b>750</b>	<b>12.9</b>	751	12.8
403.gcc	<b>885</b>	<b>9.09</b>	883	9.12	891	9.04	<b>500</b>	<b>16.1</b>	499	16.1	500	16.1
429.mcf	438	20.8	<b>437</b>	<b>20.9</b>	437	20.9	307	29.7	<b>309</b>	<b>29.6</b>	309	29.5
445.gobmk	<b>771</b>	<b>13.6</b>	772	13.6	771	13.6	<b>654</b>	<b>16.0</b>	654	16.0	654	16.1
456.hmmer	<b>513</b>	<b>18.2</b>	511	18.3	514	18.2	325	28.7	323	28.9	<b>323</b>	<b>28.9</b>
458.sjeng	<b>892</b>	<b>13.6</b>	891	13.6	893	13.6	828	14.6	834	14.5	<b>828</b>	<b>14.6</b>
462.libquantum	103	201	<b>144</b>	<b>144</b>	146	142	81.1	255	<b>85.2</b>	<b>243</b>	93.1	223
464.h264ref	1073	20.6	1045	21.2	<b>1047</b>	<b>21.1</b>	<b>1001</b>	<b>22.1</b>	1014	21.8	1000	22.1
471.omnetpp	477	13.1	485	12.9	<b>482</b>	<b>13.0</b>	<b>460</b>	<b>13.6</b>	463	13.5	460	13.6
473.astar	659	10.7	<b>662</b>	<b>10.6</b>	663	10.6	581	12.1	<b>581</b>	<b>12.1</b>	581	12.1
483.xalancbmk	370	18.6	<b>372</b>	<b>18.6</b>	374	18.5	319	21.7	317	21.8	<b>318</b>	<b>21.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm.nr\_hugepages=4000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages  
powersave -f was used to set the CPU frequency to its maximum.

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/amd1002mc-speed-libs-revA/64:/cpu2006/amd1002mc-speed-libs-revA/32"  
O64\_OMP\_AFFINITY\_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"  
O64\_OMP\_SPIN\_USER\_LOCK = "true"  
HUGETLB\_LIMIT = "450"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 22.3**

ProLiant SL165s G7  
(2.30 GHz AMD Opteron 6176)

**SPECint\_base2006 = 17.5**

**CPU2006 license:** 3

**Test date:** Jan-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jul-2010

## General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -apo -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel\_overhead=10000

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 22.3**

ProLiant SL165s G7  
(2.30 GHz AMD Opteron 6176)

**SPECint\_base2006 = 17.5**

**CPU2006 license:** 3

**Test date:** Jan-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jul-2010

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 22.3**

ProLiant SL165s G7  
(2.30 GHz AMD Opteron 6176)

**SPECint\_base2006 = 17.5**

**CPU2006 license:** 3

**Test date:** Jan-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jul-2010

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -IPA:min\_hotness=32 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000  
-IPA:plimit=20000 -mso

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-WOPT:if\_conv=0 -m32 -HP:bdt=2m:heap=2m

473.astar: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant SL165s G7  
(2.30 GHz AMD Opteron 6176)

**SPECint2006 = 22.3**

**SPECint\_base2006 = 17.5**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jul-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 15:04:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 February 2011.