



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = **48.4**

Huawei XH620, Intel Xeon X5660

SPECfp_base2006 = **46.6**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

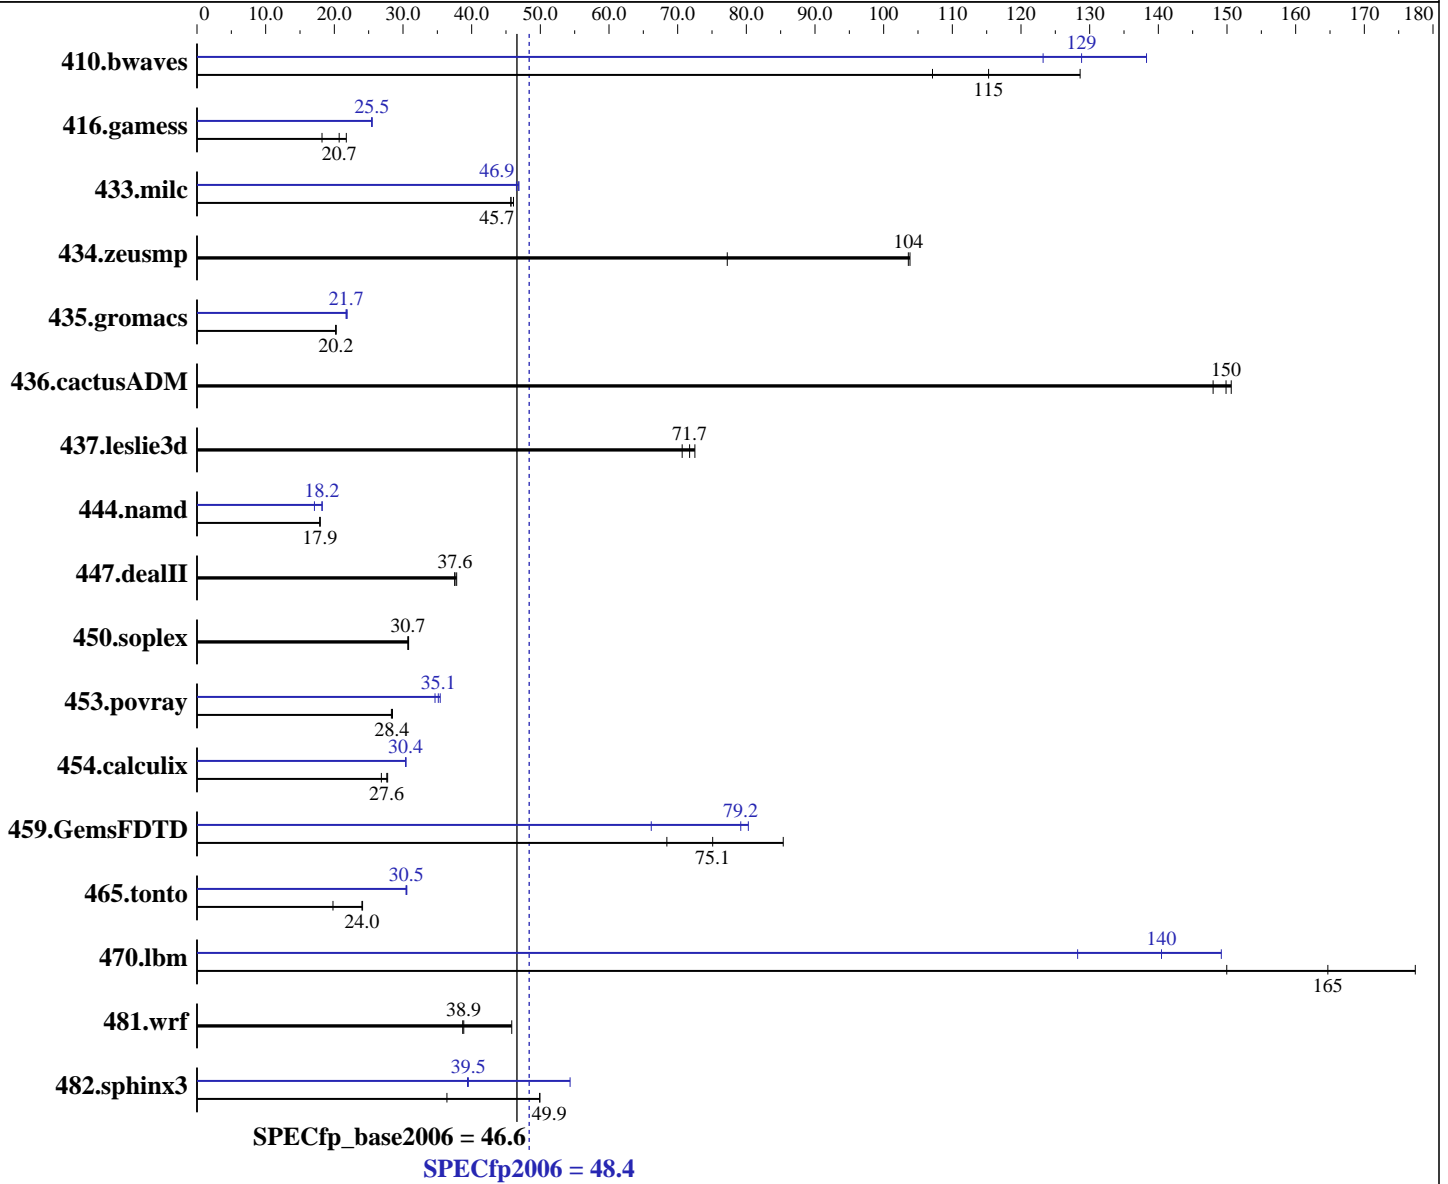

Hardware

CPU Name: Intel Xeon X5660
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 48.4

Huawei XH620, Intel Xeon X5660

SPECfp_base2006 = 46.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SAS, 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	106	129	127	107	118	115	105	129	98.3	138	110	123
416.gamess	946	20.7	1075	18.2	900	21.7	768	25.5	770	25.4	768	25.5
433.milc	201	45.7	199	46.1	201	45.7	197	46.5	196	46.9	196	46.9
434.zeusmp	87.6	104	87.8	104	118	77.2	87.6	104	87.8	104	118	77.2
435.gromacs	353	20.2	354	20.2	353	20.3	329	21.7	326	21.9	328	21.7
436.cactusADM	79.3	151	79.7	150	80.8	148	79.3	151	79.7	150	80.8	148
437.leslie3d	130	72.5	131	71.7	133	70.7	130	72.5	131	71.7	133	70.7
444.namd	448	17.9	447	17.9	448	17.9	469	17.1	440	18.2	441	18.2
447.dealII	305	37.6	305	37.5	303	37.8	305	37.6	305	37.5	303	37.8
450.soplex	271	30.8	271	30.7	271	30.7	271	30.8	271	30.7	271	30.7
453.povray	187	28.5	188	28.3	187	28.4	150	35.4	151	35.1	153	34.7
454.calculix	297	27.8	298	27.6	307	26.8	271	30.4	271	30.4	271	30.4
459.GemsFDTD	141	75.1	124	85.4	155	68.4	134	79.2	132	80.3	160	66.2
465.tonto	408	24.1	410	24.0	497	19.8	323	30.5	322	30.6	323	30.5
470.lbm	77.4	177	91.6	150	83.4	165	92.1	149	97.8	140	107	128
481.wrf	244	45.8	288	38.9	289	38.7	244	45.8	288	38.9	289	38.7
482.sphinx3	390	49.9	391	49.9	535	36.4	359	54.3	495	39.4	493	39.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run. Hugepages were not configured on the system.

Platform Notes

Data Reuse disabled in BIOS.

General Notes

Binaries compiled on RHEL 5.5
OMP_NUM_THREADS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.4
Huawei XH620, Intel Xeon X5660	SPECfp_base2006 =	46.6

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2011
Hardware Availability: Apr-2010
Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.4
Huawei XH620, Intel Xeon X5660	SPECfp_base2006 =	46.6

CPU2006 license: 3175	Test date: Mar-2011
Test sponsor: Huawei	Hardware Availability: Apr-2010
Tested by: Huawei	Software Availability: Jan-2011

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.4
Huawei XH620, Intel Xeon X5660	SPECfp_base2006 =	46.6

CPU2006 license: 3175	Test date: Mar-2011
Test sponsor: Huawei	Hardware Availability: Apr-2010
Tested by: Huawei	Software Availability: Jan-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revA.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revA.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 48.4

Huawei XH620, Intel Xeon X5660

SPECfp_base2006 = 46.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 21:16:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2011.