



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp®2006 = 31.3**

### IBM System x3400 M3 (Intel Xeon E5603)

**SPECfp\_base2006 = 29.5**

CPU2006 license: 11


Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

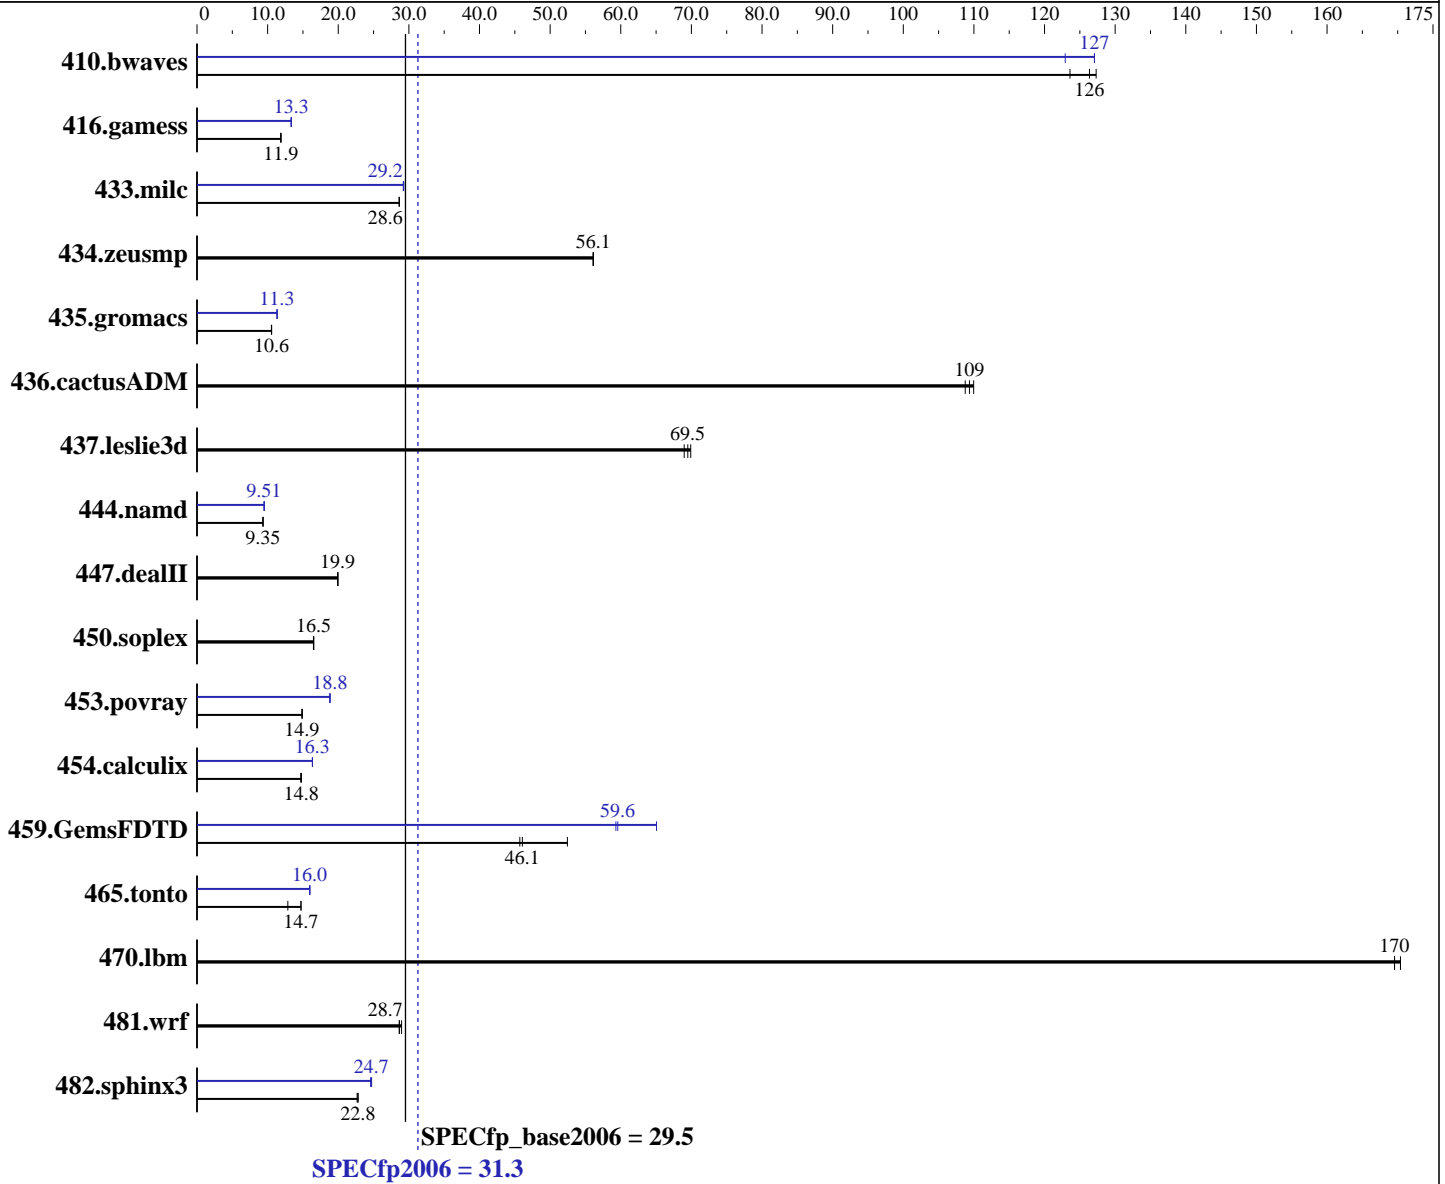

### Hardware

CPU Name: Intel Xeon E5603  
 CPU Characteristics:  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 31.3

IBM System x3400 M3 (Intel Xeon E5603)

SPECfp\_base2006 = 29.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>108</b>	<b>126</b>	110	124	107	127	<b>107</b>	<b>127</b>	111	123	107	127
416.gamess	1652	11.9	<b>1649</b>	<b>11.9</b>	1646	11.9	<b>1468</b>	<b>13.3</b>	1466	13.4	1468	13.3
433.milc	321	28.6	<b>321</b>	<b>28.6</b>	320	28.6	<b>314</b>	<b>29.2</b>	313	29.3	314	29.2
434.zeusmp	162	56.1	<b>162</b>	<b>56.1</b>	162	56.1	162	56.1	<b>162</b>	<b>56.1</b>	162	56.1
435.gromacs	675	10.6	678	10.5	<b>677</b>	<b>10.6</b>	629	11.4	<b>630</b>	<b>11.3</b>	630	11.3
436.cactusADM	<b>109</b>	<b>109</b>	109	110	110	109	<b>109</b>	<b>109</b>	109	110	110	109
437.leslie3d	<b>135</b>	<b>69.5</b>	134	69.9	136	69.0	<b>135</b>	<b>69.5</b>	134	69.9	136	69.0
444.namd	859	9.34	858	9.35	<b>858</b>	<b>9.35</b>	844	9.50	843	9.52	<b>844</b>	<b>9.51</b>
447.dealII	574	19.9	<b>574</b>	<b>19.9</b>	574	19.9	574	19.9	<b>574</b>	<b>19.9</b>	574	19.9
450.soplex	504	16.5	506	16.5	<b>505</b>	<b>16.5</b>	504	16.5	506	16.5	<b>505</b>	<b>16.5</b>
453.povray	357	14.9	<b>357</b>	<b>14.9</b>	358	14.9	<b>283</b>	<b>18.8</b>	283	18.8	282	18.8
454.calculix	<b>559</b>	<b>14.8</b>	561	14.7	558	14.8	505	16.4	505	16.3	<b>505</b>	<b>16.3</b>
459.GemsFDTD	202	52.4	232	45.7	<b>230</b>	<b>46.1</b>	163	65.1	<b>178</b>	<b>59.6</b>	179	59.3
465.tonto	668	14.7	<b>669</b>	<b>14.7</b>	765	12.9	<b>616</b>	<b>16.0</b>	616	16.0	617	16.0
470.ibm	81.0	170	<b>81.0</b>	<b>170</b>	80.6	170	81.0	170	<b>81.0</b>	<b>170</b>	80.6	170
481.wrf	386	29.0	<b>390</b>	<b>28.7</b>	390	28.6	386	29.0	<b>390</b>	<b>28.7</b>	390	28.6
482.sphinx3	<b>856</b>	<b>22.8</b>	854	22.8	860	22.7	788	24.7	<b>790</b>	<b>24.7</b>	793	24.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

Power C-State enabled in BIOS  
Data Reuse disabled in BIOS  
Demand Scrub disabled in BIOS



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 31.3

IBM System x3400 M3 (Intel Xeon E5603)

SPECfp\_base2006 = 29.5

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores  
Binaries compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 31.3

IBM System x3400 M3 (Intel Xeon E5603)

SPECfp\_base2006 = 29.5

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 31.3

IBM System x3400 M3 (Intel Xeon E5603)

SPECfp\_base2006 = 29.5

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 31.3

IBM System x3400 M3 (Intel Xeon E5603)

SPECfp\_base2006 = 29.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 19:48:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 April 2011.