



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = **64.7**

## CELSIUS R670, Intel Xeon X5690

SPECfp\_base2006 = **61.3**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

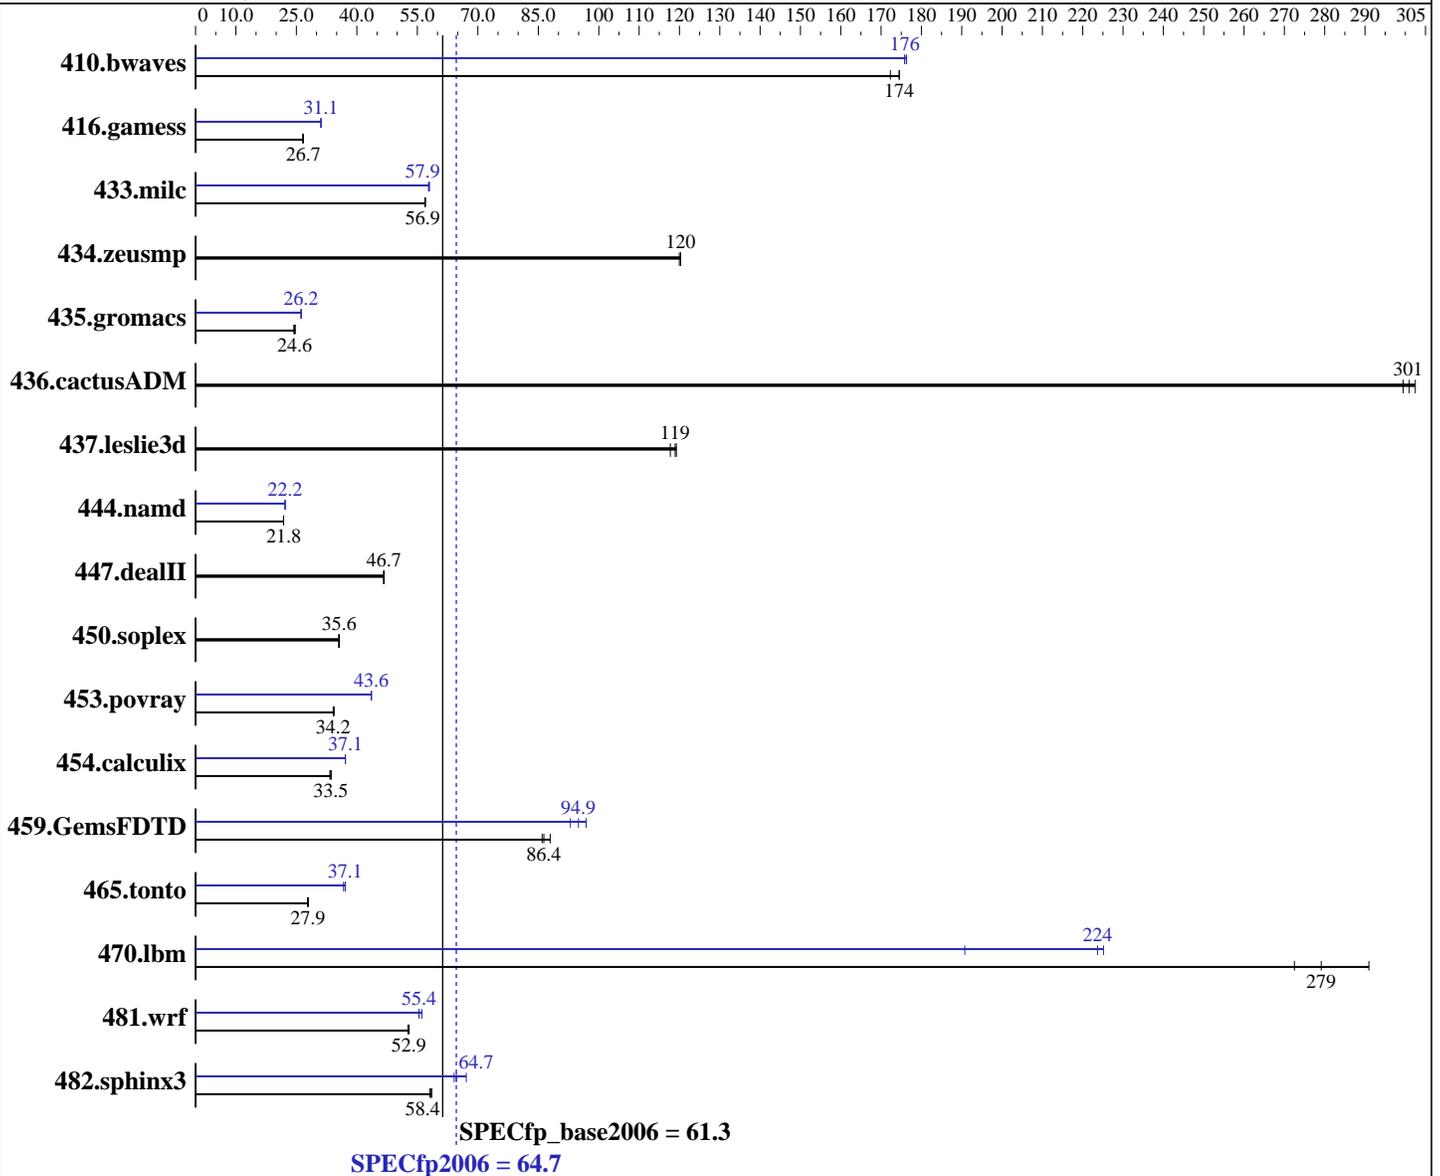

### Hardware

CPU Name: Intel Xeon X5690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
 CPU MHz: 3467  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), kernel 2.6.32.12-0.6-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2.137 Build 20110112  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **64.7**

## CELSIUS R670, Intel Xeon X5690

SPECfp\_base2006 = **61.3**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x SATA II, 400 GB, 7200 rpm  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

### Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	78.9	172	77.9	174	<u>77.9</u>	<u>174</u>	77.1	176	77.3	176	<u>77.3</u>	<u>176</u>
416.gamess	736	26.6	733	26.7	<u>733</u>	<u>26.7</u>	630	31.1	629	31.1	<u>630</u>	<u>31.1</u>
433.milc	161	56.9	161	57.0	<u>161</u>	<u>56.9</u>	<u>159</u>	<u>57.9</u>	159	57.8	158	58.0
434.zeusmp	75.7	120	<u>75.7</u>	<u>120</u>	75.9	120	75.7	120	<u>75.7</u>	<u>120</u>	75.9	120
435.gromacs	289	24.7	<u>290</u>	<u>24.6</u>	293	24.4	<u>273</u>	<u>26.2</u>	273	26.2	272	26.2
436.cactusADM	39.9	299	39.5	302	<u>39.7</u>	<u>301</u>	39.9	299	39.5	302	<u>39.7</u>	<u>301</u>
437.leslie3d	79.8	118	78.8	119	<u>79.0</u>	<u>119</u>	79.8	118	78.8	119	<u>79.0</u>	<u>119</u>
444.namd	<u>367</u>	<u>21.8</u>	367	21.8	367	21.8	361	22.2	<u>361</u>	<u>22.2</u>	361	22.2
447.dealII	245	46.8	245	46.6	<u>245</u>	<u>46.7</u>	245	46.8	245	46.6	<u>245</u>	<u>46.7</u>
450.soplex	234	35.6	235	35.5	<u>234</u>	<u>35.6</u>	234	35.6	235	35.5	<u>234</u>	<u>35.6</u>
453.povray	155	34.4	156	34.2	<u>156</u>	<u>34.2</u>	122	43.6	<u>122</u>	<u>43.6</u>	122	43.6
454.calculix	<u>246</u>	<u>33.5</u>	248	33.3	245	33.6	<u>222</u>	<u>37.1</u>	222	37.1	222	37.2
459.GemsFDTD	<u>123</u>	<u>86.4</u>	121	87.9	123	85.9	110	96.9	114	92.9	<u>112</u>	<u>94.9</u>
465.tonto	354	27.8	<u>353</u>	<u>27.9</u>	352	28.0	268	36.7	265	37.1	<u>265</u>	<u>37.1</u>
470.lbm	50.4	272	47.2	291	<u>49.2</u>	<u>279</u>	<u>61.4</u>	<u>224</u>	61.0	225	72.0	191
481.wrf	211	53.0	212	52.7	<u>211</u>	<u>52.9</u>	202	55.4	199	56.1	<u>201</u>	<u>55.4</u>
482.sphinx3	335	58.1	333	58.5	<u>333</u>	<u>58.4</u>	304	64.1	<u>301</u>	<u>64.7</u>	290	67.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Hugepages were enabled by:
mount -t hugetlbfs nodev /mnt/hugepages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

### Platform Notes

BIOS settings:  
Hyper-Threading Technology = Disabled  
Date Reuse Optimization = Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 64.7

CELSIUS R670, Intel Xeon X5690

SPECfp\_base2006 = 61.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 64.7

CELSIUS R670, Intel Xeon X5690

SPECfp\_base2006 = 61.3

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -parallel  
-ansi-alias -static -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 64.7

CELSIUS R670, Intel Xeon X5690

SPECfp\_base2006 = 61.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-ansi-alias

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Platform.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 64.7

CELSIUS R670, Intel Xeon X5690

SPECfp\_base2006 = 61.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:59:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 April 2011.