



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]2006 = 44.5

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp_base2006 = 43.3

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

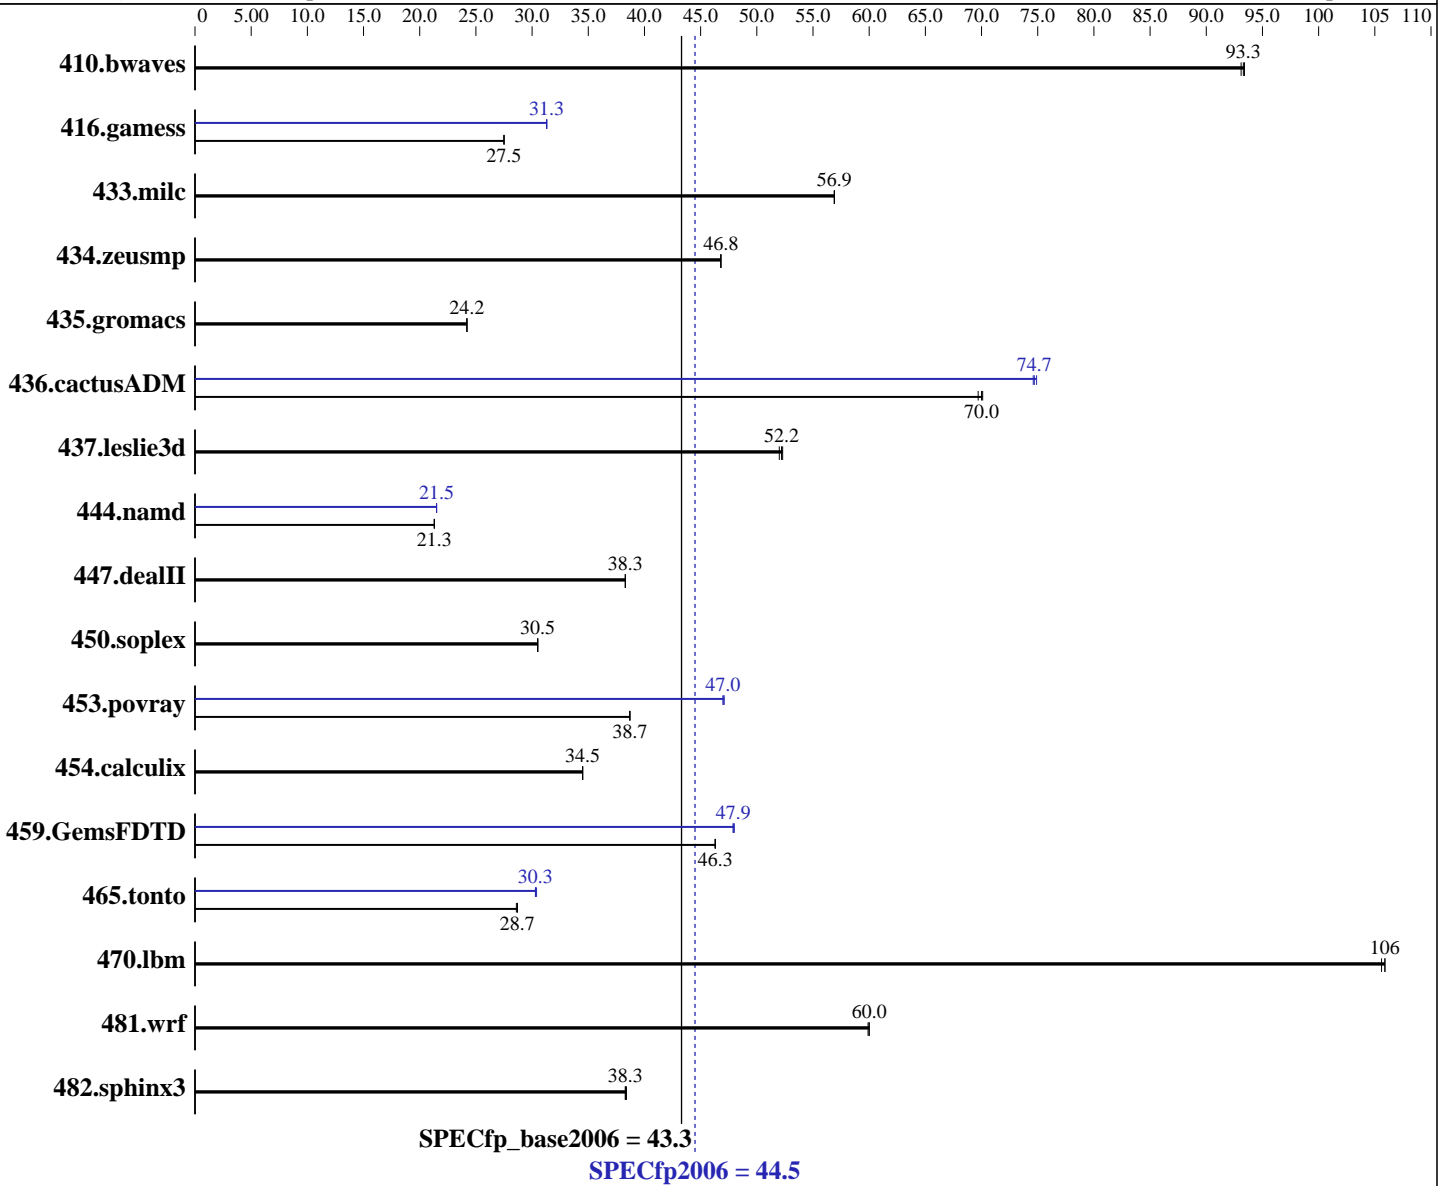

Hardware

CPU Name: Intel Core i3-2100
 CPU Characteristics:
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for Intel64
 Version 12.0.3.163 Build 20110217
 Intel Visual Fortran Compiler XE for Intel64
 Version 12.0.0.104 Build 20101006
 Microsoft Visual Studio 2008 Professional SP1
 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 44.5

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp_base2006 = 43.3

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	146	93.1	146	93.3	146	93.4	146	93.1	146	93.3	146	93.4
416.gamess	713	27.5	713	27.5	713	27.5	625	31.3	625	31.3	625	31.3
433.milc	161	56.9	161	56.9	161	56.9	161	56.9	161	56.9	161	56.9
434.zeusmp	194	46.8	195	46.8	194	46.8	194	46.8	195	46.8	194	46.8
435.gromacs	295	24.2	295	24.2	295	24.2	295	24.2	295	24.2	295	24.2
436.cactusADM	172	69.7	171	70.0	170	70.1	160	74.7	160	74.9	160	74.6
437.leslie3d	180	52.2	181	52.0	180	52.3	180	52.2	181	52.0	180	52.3
444.namd	376	21.3	376	21.3	376	21.3	372	21.5	372	21.5	372	21.5
447.dealII	299	38.3	299	38.3	299	38.3	299	38.3	299	38.3	299	38.3
450.soplex	273	30.5	273	30.5	274	30.5	273	30.5	273	30.5	274	30.5
453.povray	137	38.7	138	38.7	138	38.7	113	47.0	113	47.1	113	47.0
454.calculix	239	34.5	239	34.5	239	34.5	239	34.5	239	34.5	239	34.5
459.GemsFDTD	229	46.3	229	46.3	229	46.3	221	48.0	221	47.9	222	47.9
465.tonto	344	28.6	343	28.7	343	28.7	324	30.4	324	30.3	324	30.3
470.lbm	130	106	130	106	130	106	130	106	130	106	130	106
481.wrf	186	60.0	186	59.9	186	60.0	186	60.0	186	59.9	186	60.0
482.sphinx3	508	38.4	509	38.3	509	38.3	508	38.4	509	38.3	509	38.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 OMP_NUM_THREADS set to number of processors cores
 KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qstd=c99

C++ benchmarks:
 icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 44.5

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp_base2006 = 43.3

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 44.5

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp_base2006 = 43.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-
/F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 44.5

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECfp_base2006 = 43.3

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2
-Qauto-ilp32 /F1000000000

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:44:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 May 2011.