




# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

BladeSymphony BS320 (Intel Xeon X5675)

**SPECfp®2006 = 59.5**

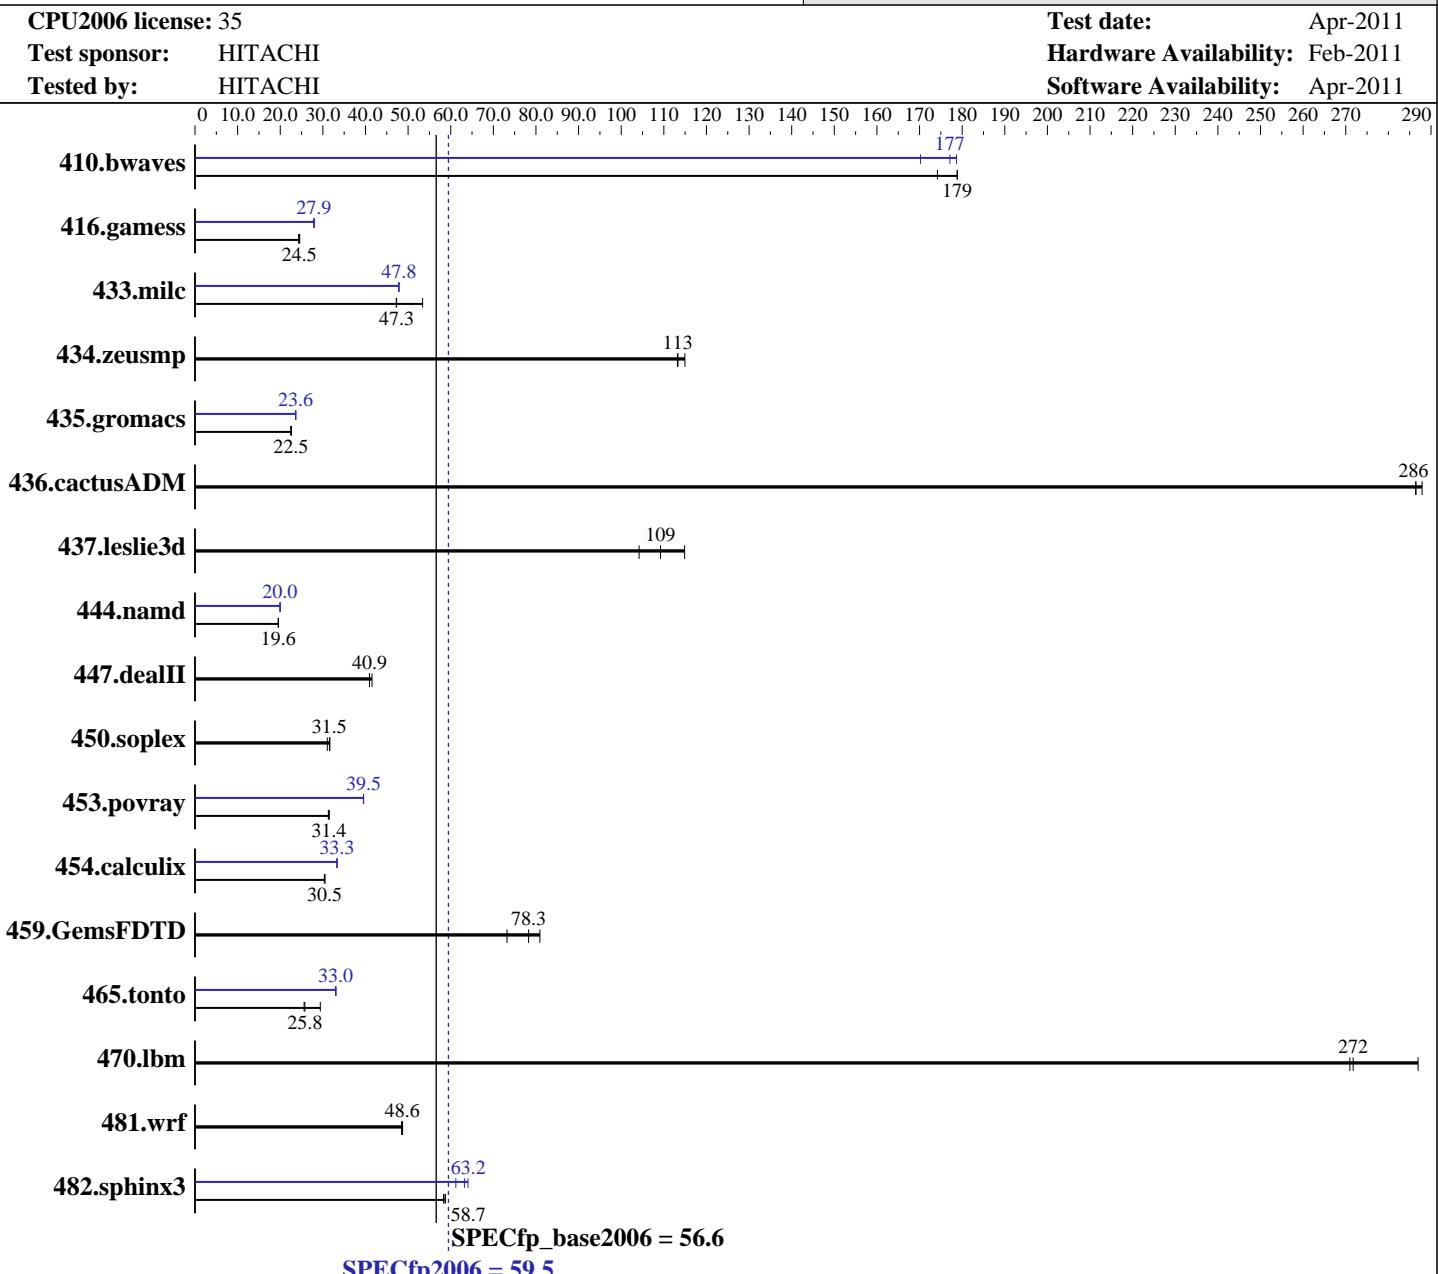

## Hardware

CPU Name: Intel Xeon X5675  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
 CPU MHz: 3060  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86\_64  
 Compiler: Intel C++ Compiler XE for Linux Version 12.0.3.174 Build 20110309  
 Intel Fortran Compiler XE for Linux Version 12.0.3.174 Build 20110309  
 Auto Parallel: Yes  
 File System: ext3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon X5675)

**SPECfp2006 = 59.5**

CPU2006 license: 35

Test date: Apr-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2011

Tested by: HITACHI

Software Availability: Apr-2011

L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1333 MHz)
Disk Subsystem:	2 x 147 GB 10000 rpm SAS RAID1 configuration
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	78.0	174	76.0	179	<b><u>76.0</u></b>	<b><u>179</u></b>	79.8	170	76.1	179	<b><u>76.7</u></b>	<b><u>177</u></b>
416.gamess	805	24.3	<b><u>799</u></b>	<b><u>24.5</u></b>	797	24.6	<b><u>702</u></b>	<b><u>27.9</u></b>	699	28.0	702	27.9
433.milc	<b><u>194</u></b>	<b><u>47.3</u></b>	194	47.2	172	53.4	192	47.8	192	47.9	<b><u>192</u></b>	<b><u>47.8</u></b>
434.zeusmp	80.4	113	<b><u>80.3</u></b>	<b><u>113</u></b>	79.2	115	80.4	113	<b><u>80.3</u></b>	<b><u>113</u></b>	79.2	115
435.gromacs	316	22.6	318	22.5	<b><u>317</u></b>	<b><u>22.5</u></b>	<b><u>302</u></b>	<b><u>23.6</u></b>	303	23.6	302	23.7
436.cactusADM	41.7	286	<b><u>41.7</u></b>	<b><u>286</u></b>	41.5	288	41.7	286	<b><u>41.7</u></b>	<b><u>286</u></b>	41.5	288
437.leslie3d	81.8	115	<b><u>86.1</u></b>	<b><u>109</u></b>	90.2	104	81.8	115	<b><u>86.1</u></b>	<b><u>109</u></b>	90.2	104
444.namd	409	19.6	411	19.5	<b><u>410</u></b>	<b><u>19.6</u></b>	402	20.0	<b><u>402</u></b>	<b><u>20.0</u></b>	402	20.0
447.dealII	<b><u>279</u></b>	<b><u>40.9</u></b>	279	40.9	275	41.5	<b><u>279</u></b>	<b><u>40.9</u></b>	279	40.9	275	41.5
450.soplex	269	31.0	<b><u>264</u></b>	<b><u>31.5</u></b>	263	31.7	269	31.0	<b><u>264</u></b>	<b><u>31.5</u></b>	263	31.7
453.povray	<b><u>169</u></b>	<b><u>31.4</u></b>	169	31.5	170	31.3	134	39.6	135	39.5	<b><u>135</u></b>	<b><u>39.5</u></b>
454.calculix	<b><u>271</u></b>	<b><u>30.5</u></b>	272	30.3	271	30.5	248	33.3	248	33.3	<b><u>248</u></b>	<b><u>33.3</u></b>
459.GemsFDTD	<b><u>136</u></b>	<b><u>78.3</u></b>	131	80.9	145	73.2	<b><u>136</u></b>	<b><u>78.3</u></b>	131	80.9	145	73.2
465.tonto	<b><u>382</u></b>	<b><u>25.8</u></b>	384	25.6	335	29.4	298	33.1	<b><u>298</u></b>	<b><u>33.0</u></b>	298	33.0
470.lbm	50.7	271	47.9	287	<b><u>50.6</u></b>	<b><u>272</u></b>	50.7	271	47.9	287	<b><u>50.6</u></b>	<b><u>272</u></b>
481.wrf	229	48.7	230	48.5	<b><u>230</u></b>	<b><u>48.6</u></b>	229	48.7	230	48.5	<b><u>230</u></b>	<b><u>48.6</u></b>
482.sphinx3	<b><u>332</u></b>	<b><u>58.7</u></b>	334	58.3	332	58.7	<b><u>308</u></b>	<b><u>63.2</u></b>	318	61.2	304	64.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run Hugepages was enabled with the following:

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:

Intel HT Technology = Disabled  
Data Reuse Optimization = Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon X5675)

**SPECfp2006 =**

**59.5**

**SPECfp\_base2006 =**

**56.6**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:**

Apr-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Apr-2011

## Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon X5675)

**SPECfp2006 =**

**59.5**

**SPECfp\_base2006 =**

**56.6**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:**

Apr-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Apr-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon X5675)

SPECfp2006 =

59.5

SPECfp\_base2006 =

56.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date:

Apr-2011

Hardware Availability:

Feb-2011

Software Availability:

Apr-2011

## Peak Optimization Flags (Continued)

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/PlatformHitachi.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/PlatformHitachi.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:08:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 May 2011.