



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp<sup>®</sup>2006 = **33.9**

### IBM System x3690 X5 (Intel Xeon E7-2803)

SPECfp\_base2006 = **31.8**

CPU2006 license: 11


Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

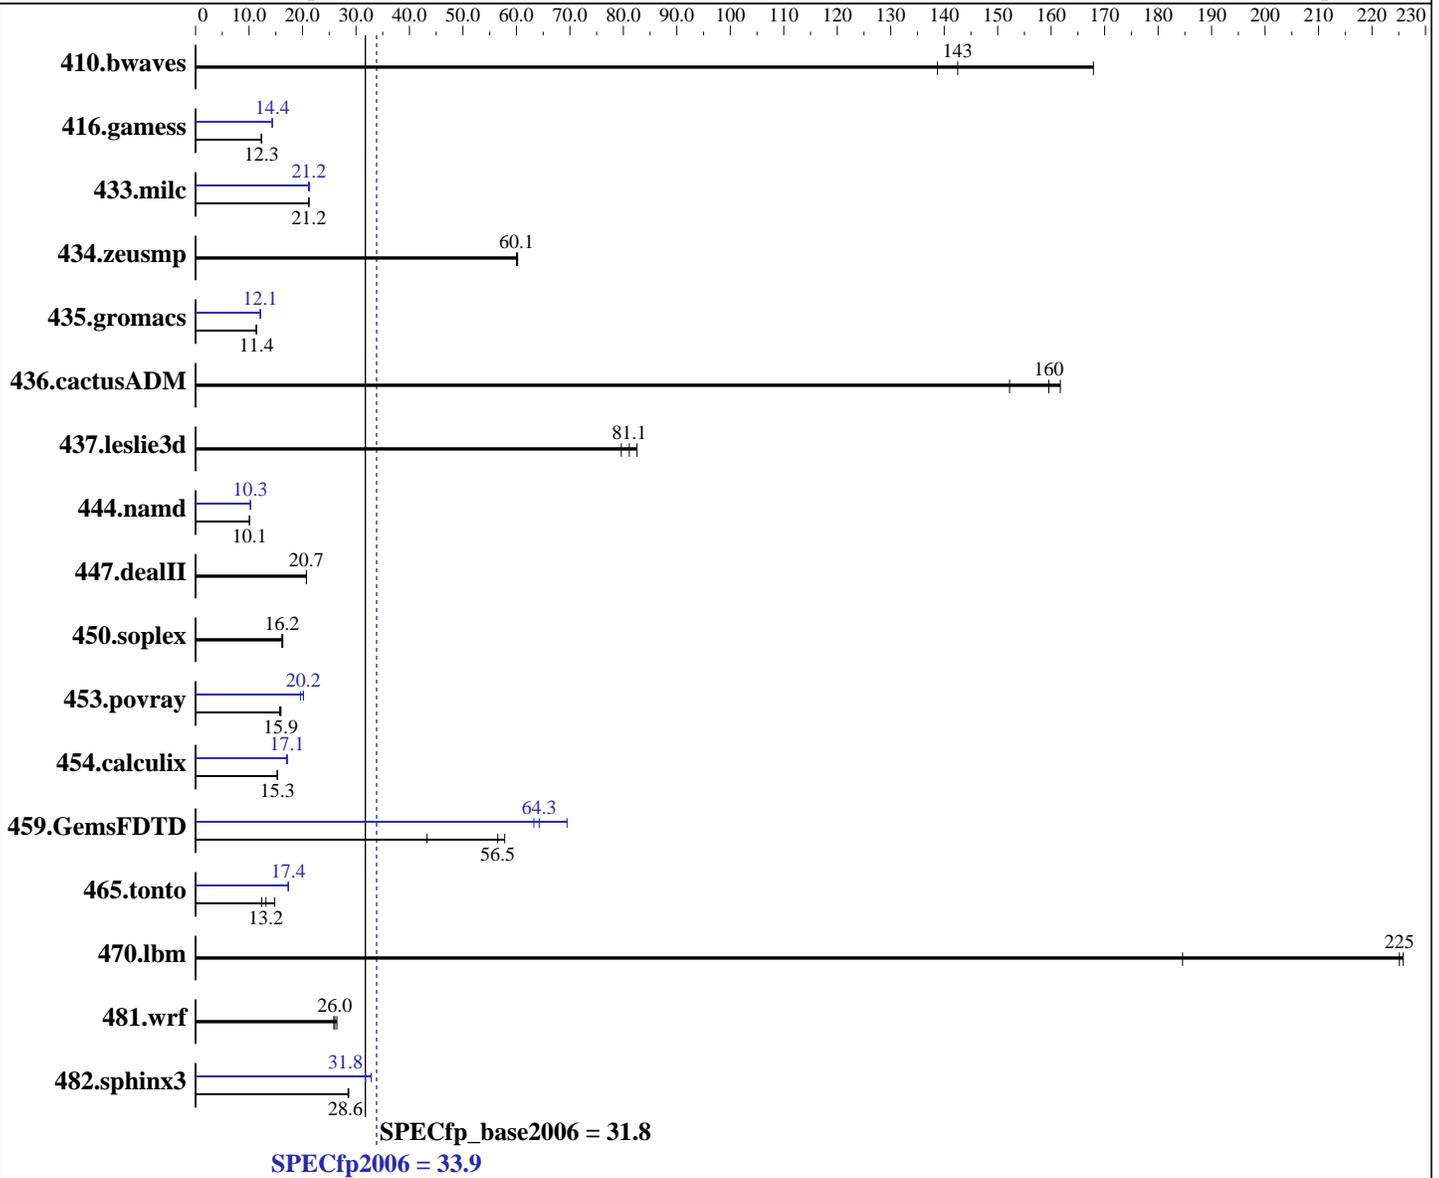

### Hardware

CPU Name: Intel Xeon E7-2803  
 CPU Characteristics:  
 CPU MHz: 1733  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = **33.9**

## IBM System x3690 X5 (Intel Xeon E7-2803)

SPECfp\_base2006 = **31.8**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

L3 Cache: 18 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 800 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	97.9	139	<b>95.4</b>	<b>143</b>	80.9	168	97.9	139	<b>95.4</b>	<b>143</b>	80.9	168
416.gamess	1583	12.4	1597	12.3	<b>1586</b>	<b>12.3</b>	<b>1363</b>	<b>14.4</b>	1363	14.4	1369	14.3
433.milc	433	21.2	433	21.2	<b>433</b>	<b>21.2</b>	435	21.1	<b>433</b>	<b>21.2</b>	430	21.3
434.zeusmp	<b>152</b>	<b>60.1</b>	151	60.2	152	60.1	<b>152</b>	<b>60.1</b>	151	60.2	152	60.1
435.gromacs	626	11.4	<b>626</b>	<b>11.4</b>	630	11.3	<b>590</b>	<b>12.1</b>	591	12.1	586	12.2
436.cactusADM	73.9	162	<b>74.9</b>	<b>160</b>	78.5	152	73.9	162	<b>74.9</b>	<b>160</b>	78.5	152
437.leslie3d	<b>116</b>	<b>81.1</b>	118	79.6	114	82.6	<b>116</b>	<b>81.1</b>	118	79.6	114	82.6
444.namd	<b>795</b>	<b>10.1</b>	796	10.1	795	10.1	781	10.3	782	10.3	<b>782</b>	<b>10.3</b>
447.dealII	551	20.7	552	20.7	<b>552</b>	<b>20.7</b>	551	20.7	552	20.7	<b>552</b>	<b>20.7</b>
450.soplex	516	16.2	511	16.3	<b>516</b>	<b>16.2</b>	516	16.2	511	16.3	<b>516</b>	<b>16.2</b>
453.povray	<b>334</b>	<b>15.9</b>	338	15.7	333	16.0	271	19.6	264	20.2	<b>264</b>	<b>20.2</b>
454.calculix	540	15.3	<b>539</b>	<b>15.3</b>	539	15.3	486	17.0	<b>482</b>	<b>17.1</b>	481	17.2
459.GemsFDTD	245	43.3	184	57.8	<b>188</b>	<b>56.5</b>	153	69.5	168	63.3	<b>165</b>	<b>64.3</b>
465.tonto	664	14.8	795	12.4	<b>747</b>	<b>13.2</b>	567	17.4	568	17.3	<b>567</b>	<b>17.4</b>
470.lbm	74.4	185	60.8	226	<b>61.0</b>	<b>225</b>	74.4	185	60.8	226	<b>61.0</b>	<b>225</b>
481.wrf	423	26.4	<b>429</b>	<b>26.0</b>	432	25.9	423	26.4	<b>429</b>	<b>26.0</b>	432	25.9
482.sphinx3	680	28.6	<b>682</b>	<b>28.6</b>	683	28.5	<b>614</b>	<b>31.8</b>	593	32.8	614	31.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited
'nodenv /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## General Notes

OMP\_NUM\_THREADS set to number of cores  
Binaries compiled on RHEL 5.5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.9

IBM System x3690 X5 (Intel Xeon E7-2803)

SPECfp\_base2006 = 31.8

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.9

IBM System x3690 X5 (Intel Xeon E7-2803)

SPECfp\_base2006 = 31.8

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.9

IBM System x3690 X5 (Intel Xeon E7-2803)

SPECfp\_base2006 = 31.8

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.9

IBM System x3690 X5 (Intel Xeon E7-2803)

SPECfp\_base2006 = 31.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 17:30:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 June 2011.