



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®2006 = 34.3**

PowerEdge M910 (Intel Xeon E7-2803, 1.73 GHz)

**SPECfp\_base2006 = 31.5**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

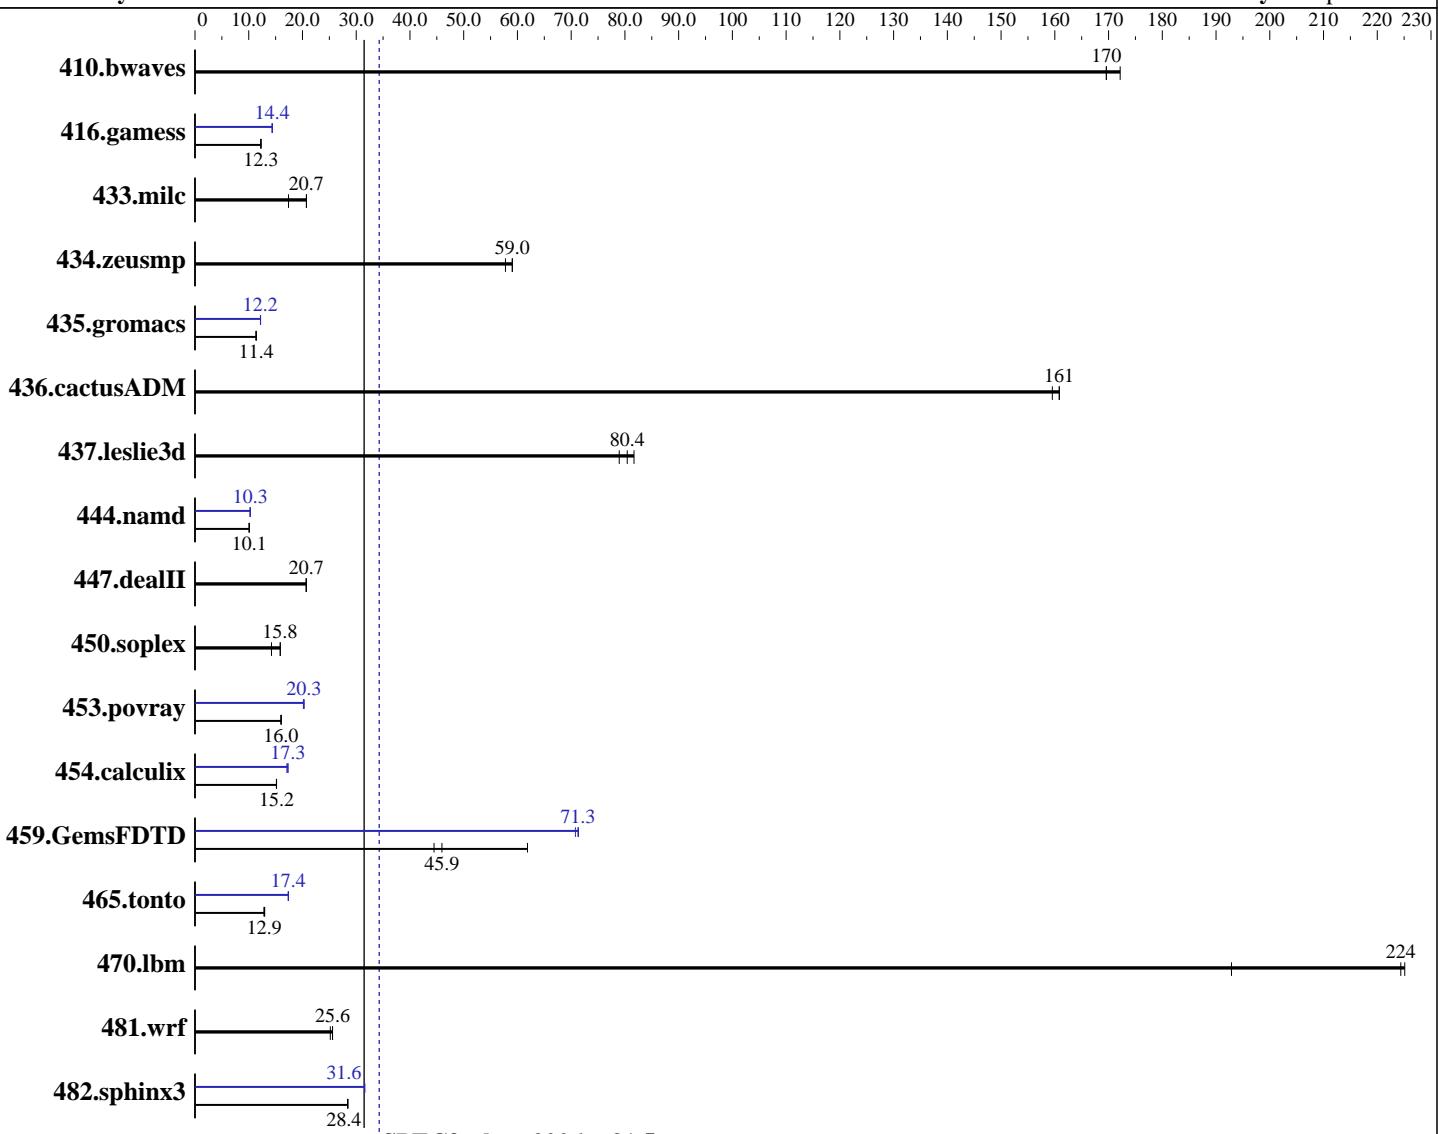

**SPECfp\_base2006 = 31.5**

**SPECfp2006 = 34.3**

## Hardware

CPU Name: Intel Xeon E7-2803  
 CPU Characteristics:  
 CPU MHz: 1733  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 34.3**

PowerEdge M910 (Intel Xeon E7-2803, 1.73 GHz)

**SPECfp\_base2006 = 31.5**

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC, running at 800 MHz)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>80.1</b>	<b>170</b>	80.1	170	78.9	172	<b>80.1</b>	<b>170</b>	80.1	170	78.9	172
416.gamess	1592	12.3	<b>1598</b>	<b>12.3</b>	1598	12.3	1364	14.4	<b>1362</b>	<b>14.4</b>	1360	14.4
433.milc	528	17.4	443	20.7	<b>443</b>	<b>20.7</b>	528	17.4	443	20.7	<b>443</b>	<b>20.7</b>
434.zeusmp	158	57.8	154	59.0	<b>154</b>	<b>59.0</b>	158	57.8	154	59.0	<b>154</b>	<b>59.0</b>
435.gromacs	629	11.3	<b>627</b>	<b>11.4</b>	626	11.4	<b>586</b>	<b>12.2</b>	585	12.2	586	12.2
436.cactusADM	74.9	160	74.3	161	<b>74.3</b>	<b>161</b>	74.9	160	74.3	161	<b>74.3</b>	<b>161</b>
437.leslie3d	115	81.7	119	78.9	<b>117</b>	<b>80.4</b>	115	81.7	119	78.9	<b>117</b>	<b>80.4</b>
444.namd	795	10.1	795	10.1	<b>795</b>	<b>10.1</b>	781	10.3	780	10.3	<b>781</b>	<b>10.3</b>
447.dealII	<b>552</b>	<b>20.7</b>	552	20.7	553	20.7	<b>552</b>	<b>20.7</b>	552	20.7	553	20.7
450.soplex	525	15.9	586	14.2	<b>526</b>	<b>15.8</b>	525	15.9	586	14.2	<b>526</b>	<b>15.8</b>
453.povray	333	16.0	331	16.1	<b>332</b>	<b>16.0</b>	<b>263</b>	<b>20.3</b>	264	20.2	262	20.3
454.calculix	545	15.1	<b>544</b>	<b>15.2</b>	544	15.2	477	17.3	482	17.1	<b>477</b>	<b>17.3</b>
459.GemsFDTD	171	61.9	239	44.5	<b>231</b>	<b>45.9</b>	150	70.8	<b>149</b>	<b>71.3</b>	149	71.4
465.tonto	759	13.0	<b>763</b>	<b>12.9</b>	766	12.8	<b>567</b>	17.3	<b>566</b>	<b>17.4</b>	566	17.4
470.lbm	<b>61.2</b>	<b>224</b>	61.0	225	71.2	193	<b>61.2</b>	<b>224</b>	61.0	225	71.2	193
481.wrf	436	25.6	<b>436</b>	<b>25.6</b>	444	25.2	<b>436</b>	25.6	<b>436</b>	<b>25.6</b>	444	25.2
482.sphinx3	686	28.4	<b>686</b>	<b>28.4</b>	684	28.5	<b>618</b>	<b>31.6</b>	618	31.6	617	31.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)  
 Logical Processor = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 34.3**

PowerEdge M910 (Intel Xeon E7-2803, 1.73 GHz)

**SPECfp\_base2006 = 31.5**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores  
Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 34.3**

PowerEdge M910 (Intel Xeon E7-2803, 1.73 GHz)

**SPECfp\_base2006 = 31.5**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 34.3**

PowerEdge M910 (Intel Xeon E7-2803, 1.73 GHz)

**SPECfp\_base2006 = 31.5**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

```
453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
             -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep- -static
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel
                -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT
```

```
465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
             -opt-malloc-options=3 -auto -unroll14
             -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
              -ansi-alias
```

436.cactusADM: basepeak = yes

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 34.3**

PowerEdge M910 (Intel Xeon E7-2803, 1.73 GHz)

**SPECfp\_base2006 = 31.5**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2011

**Hardware Availability:** Apr-2011

**Software Availability:** Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:39:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 June 2011.