



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]2006 = 56.3

PRIMERGY TX100 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp_base2006 = 54.1

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

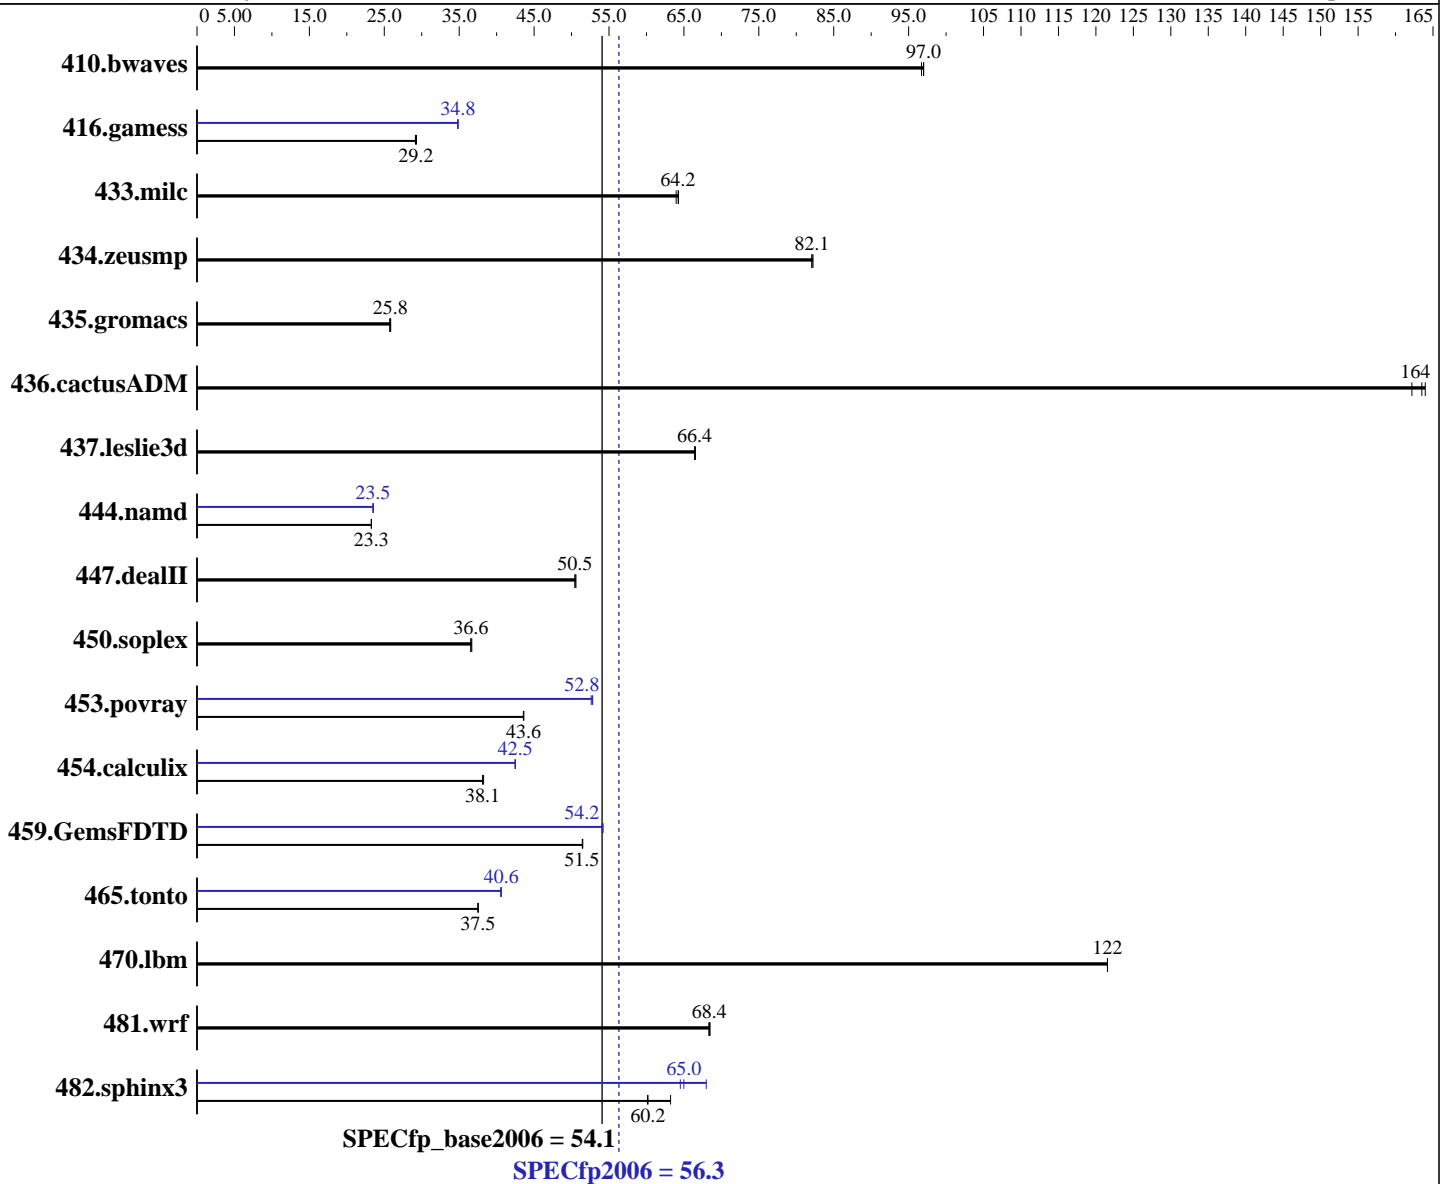

Hardware

CPU Name: Intel Xeon E3-1220
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **56.3**

PRIMERGY TX100 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp_base2006 = **54.1**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	141	96.7	140	97.0	140	97.0	141	96.7	140	97.0	140	97.0
416.gamess	668	29.3	670	29.2	672	29.2	563	34.8	562	34.9	562	34.8
433.milc	143	64.2	143	64.3	144	64.0	143	64.2	143	64.3	144	64.0
434.zeusmp	111	82.1	111	82.2	111	82.1	111	82.1	111	82.2	111	82.1
435.gromacs	277	25.8	276	25.9	278	25.7	277	25.8	276	25.9	278	25.7
436.cactusADM	73.7	162	73.1	164	72.9	164	73.7	162	73.1	164	72.9	164
437.leslie3d	141	66.4	141	66.4	141	66.5	141	66.4	141	66.4	141	66.5
444.namd	344	23.3	344	23.3	345	23.3	341	23.5	341	23.5	341	23.5
447.dealII	227	50.5	226	50.6	227	50.5	227	50.5	226	50.6	227	50.5
450.soplex	228	36.6	227	36.7	228	36.5	228	36.6	227	36.7	228	36.5
453.povray	122	43.6	122	43.6	122	43.6	101	52.8	101	52.8	101	52.6
454.calculix	216	38.1	216	38.1	216	38.3	194	42.5	194	42.5	194	42.5
459.GemsFDTD	206	51.4	206	51.5	206	51.5	196	54.2	196	54.1	196	54.2
465.tonto	262	37.5	262	37.5	262	37.5	243	40.5	242	40.6	242	40.6
470.lbm	113	122	113	122	113	122	113	122	113	122	113	122
481.wrf	163	68.5	163	68.4	163	68.3	163	68.5	163	68.4	163	68.3
482.sphinx3	308	63.2	324	60.1	324	60.2	300	65.0	287	68.0	302	64.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodetv /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 56.3

PRIMERGY TX100 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp_base2006 = 54.1

CPU2006 license: 19

Test date: Jun-2011

Test sponsor: Fujitsu

Hardware Availability: Sep-2011

Tested by: Fujitsu

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 56.3

PRIMERGY TX100 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp_base2006 = 54.1

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

447.dealIII: `basepeak = yes`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 56.3

PRIMERGY TX100 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp_base2006 = 54.1

CPU2006 license: 19

Test date: Jun-2011

Test sponsor: Fujitsu

Hardware Availability: Sep-2011

Tested by: Fujitsu

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 56.3

PRIMERGY TX100 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp_base2006 = 54.1

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:34:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 September 2011.