



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = **60.6**

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECfp_base2006 = **59.0**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

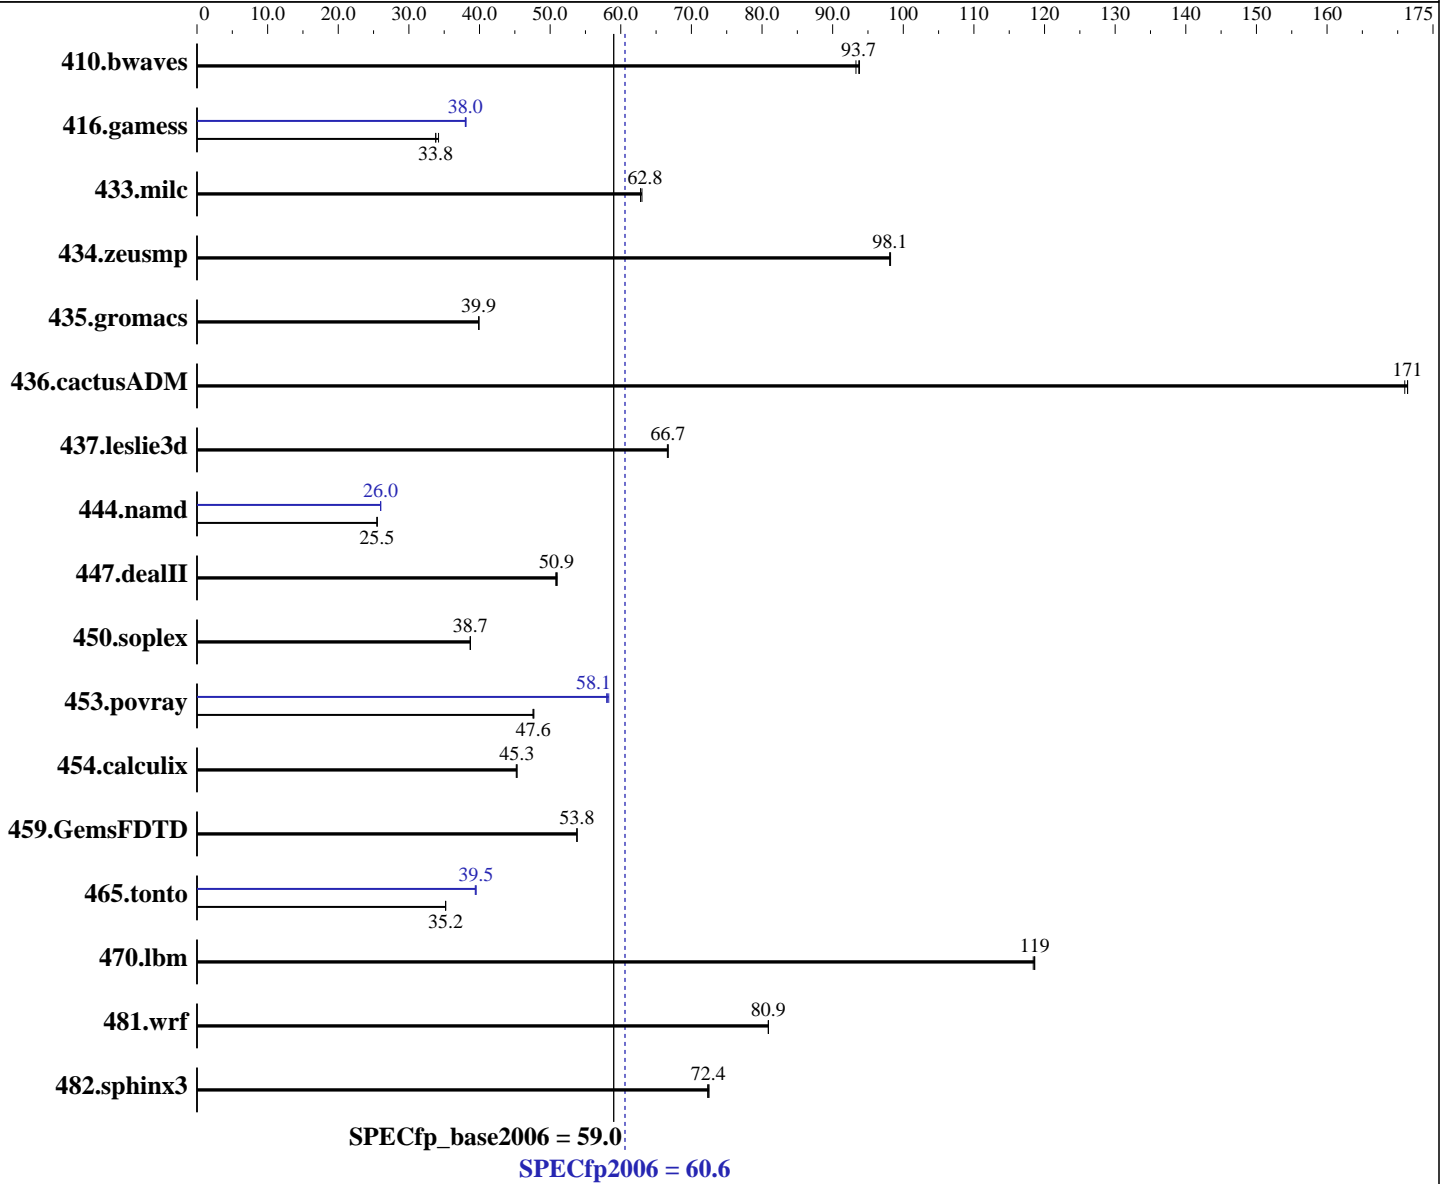

Hardware

CPU Name: Intel Core i7-2600K
 CPU Characteristics: Intel Turbo Boost Technology up to 3.8 GHz
 CPU MHz: 3401
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Microsoft Windows 7 Ultimate
 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows;
 Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **60.6**

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECfp_base2006 = **59.0**

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
 Other Hardware: None

Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	146	93.3	145	93.8	145	93.7	146	93.3	145	93.8	145	93.7
416.gamess	572	34.2	579	33.8	579	33.8	515	38.0	515	38.0	514	38.1
433.milc	146	63.0	146	62.8	146	62.8	146	63.0	146	62.8	146	62.8
434.zeusmp	92.8	98.1	92.7	98.2	92.8	98.1	92.8	98.1	92.7	98.2	92.8	98.1
435.gromacs	179	39.9	179	39.9	179	39.9	179	39.9	179	39.9	179	39.9
436.cactusADM	69.7	171	69.7	171	69.9	171	69.7	171	69.7	171	69.9	171
437.leslie3d	141	66.7	141	66.6	141	66.7	141	66.7	141	66.6	141	66.7
444.namd	315	25.5	315	25.5	315	25.5	309	26.0	308	26.0	308	26.0
447.dealII	225	51.0	225	50.8	225	50.9	225	51.0	225	50.8	225	50.9
450.soplex	215	38.7	216	38.7	215	38.7	215	38.7	216	38.7	215	38.7
453.povray	112	47.7	112	47.6	112	47.6	91.3	58.3	91.7	58.0	91.5	58.1
454.calculix	182	45.3	182	45.3	182	45.2	182	45.3	182	45.3	182	45.2
459.GemsFDTD	197	53.8	197	53.8	197	53.8	197	53.8	197	53.8	197	53.8
465.tonto	280	35.2	280	35.2	280	35.2	249	39.5	250	39.4	249	39.5
470.lbm	116	118	116	119	116	119	116	118	116	119	116	119
481.wrf	138	80.9	138	80.9	138	80.9	138	80.9	138	80.9	138	80.9
482.sphinx3	269	72.5	270	72.3	269	72.4	269	72.5	270	72.3	269	72.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

ipsxe-comp-vars batch file invoked with intel64

Platform Notes

Sysinfo program D:\CPU200~1.17A\Docs\sysinfo
 \$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
 running on CltE06995ABEA80 Wed Aug 17 22:47:09 2011

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 60.6

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECfp_base2006 = 59.0

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Platform Notes (Continued)

OS Name : Microsoft Windows 7 Ultimate
OS Version : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model : DZ68DB__
Processor(s) : 1 Processor(s) Installed.
[01]: Intel64 Family 6 Model 42 Stepping 7 GenuineIntel ~3401 Mhz
BIOS Version : Intel Corp. DBZ6810H.86A.0014.2011.0413.1049, 4/13/2011
Total Physical Memory: 8,099 MB

```
Trying 'wmic cpu get /value'  
DeviceID : CPU0  
L2CacheSize : 1024  
L3CacheSize : 8192  
MaxClockSpeed : 3401  
Name : Intel(R) Core(TM) i7-2600K CPU @ 3.40GHz  
NumberOfCores : 4  
NumberOfLogicalProcessors: 8
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 60.6

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECfp_base2006 = 59.0

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

```

Benchmarks using both Fortran and C:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc9 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc9

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 60.6

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECfp_base2006 = 59.0

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-
/F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 60.6

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECfp_base2006 = 59.0

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.html>

<http://www.spec.org/cpu2006/flags/Intel-Platform-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.xml>

<http://www.spec.org/cpu2006/flags/Intel-Platform-Settings-V1.2-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 01:42:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 October 2011.