



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp®2006 = 46.8

IBM System x3250 M4 (Intel Xeon E3-1220L)

SPECfp\_base2006 = 45.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Aug-2011

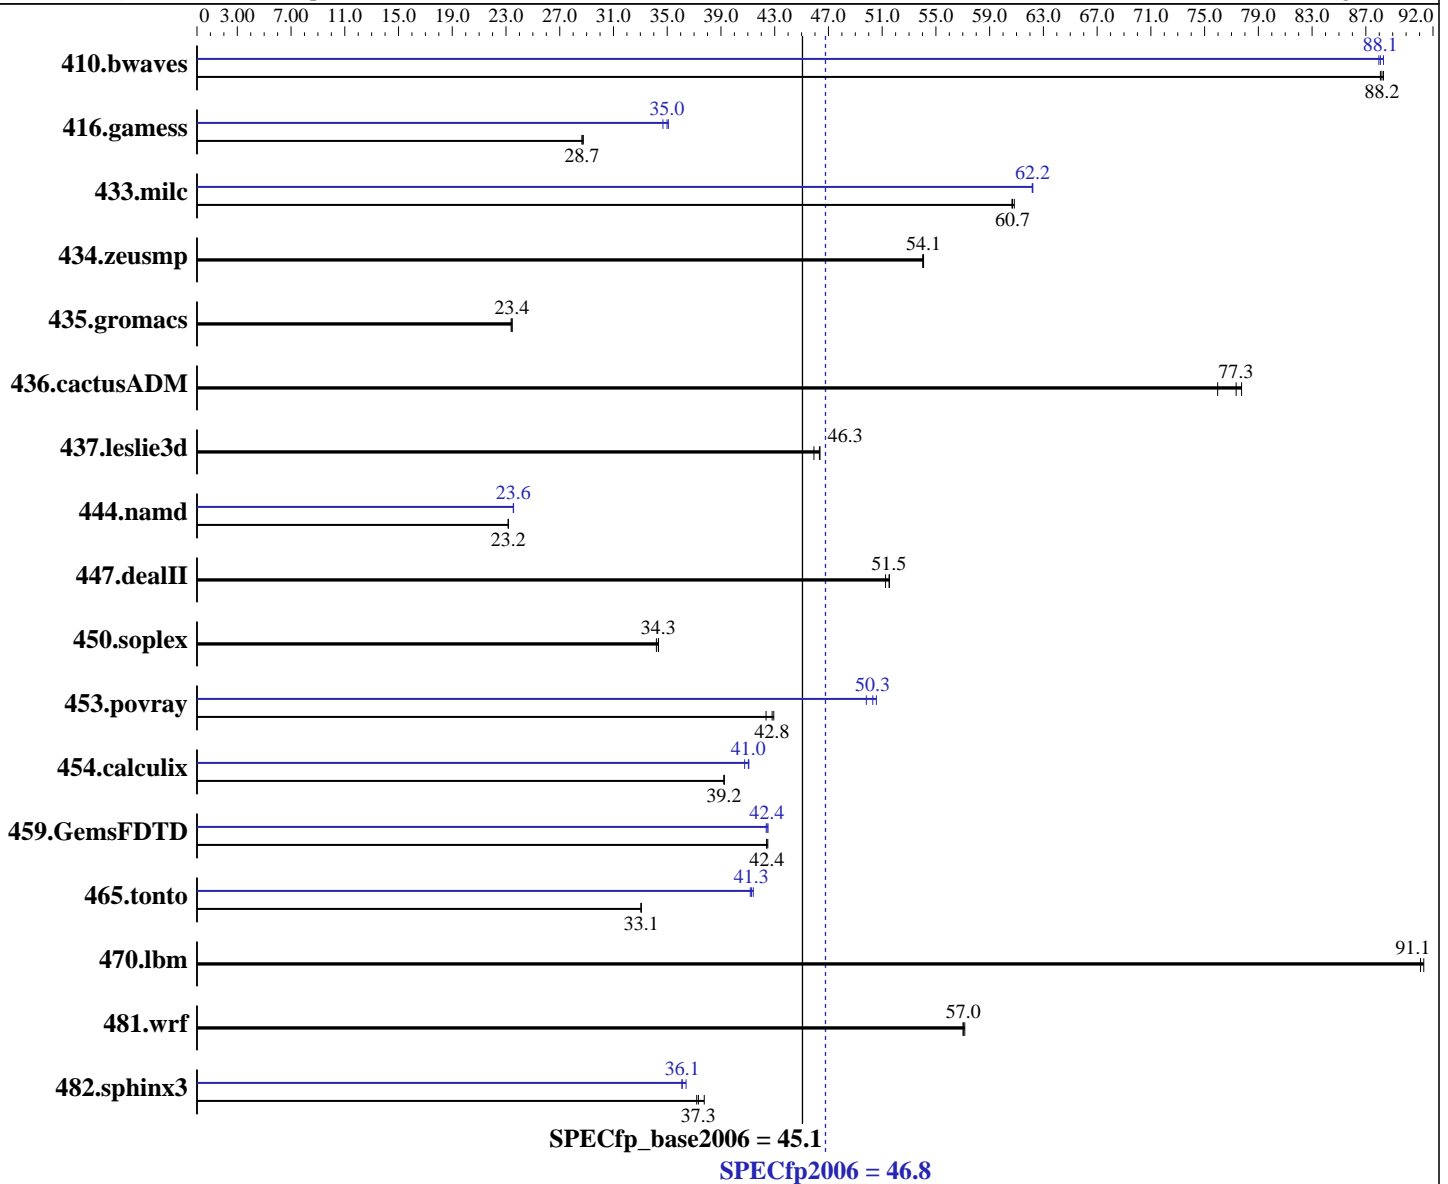

### Hardware

CPU Name: Intel Xeon E3-1220L  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 12.1.0.225 of Intel Compiler XE Build 20110803  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = 46.8

IBM System x3250 M4 (Intel Xeon E3-1220L)

SPECfp\_base2006 = 45.1

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	154	88.1	<b>154</b>	<b>88.2</b>	154	88.3	154	88.0	154	88.3	<b>154</b>	<b>88.1</b>
416.gamess	683	28.7	681	28.8	<b>683</b>	<b>28.7</b>	<b>560</b>	<b>35.0</b>	565	34.7	558	35.1
433.milc	151	60.8	151	60.7	<b>151</b>	<b>60.7</b>	148	62.2	<b>148</b>	<b>62.2</b>	148	62.2
434.zeusmp	168	54.0	168	54.1	<b>168</b>	<b>54.1</b>	168	54.0	168	54.1	<b>168</b>	<b>54.1</b>
435.gromacs	304	23.5	305	23.4	<b>305</b>	<b>23.4</b>	304	23.5	305	23.4	<b>305</b>	<b>23.4</b>
436.cactusADM	154	77.8	<b>154</b>	<b>77.3</b>	157	76.0	154	77.8	<b>154</b>	<b>77.3</b>	157	76.0
437.leslie3d	<b>203</b>	<b>46.3</b>	205	45.9	203	46.4	<b>203</b>	<b>46.3</b>	205	45.9	203	46.4
444.namd	<b>346</b>	<b>23.2</b>	346	23.2	346	23.2	<b>340</b>	<b>23.6</b>	340	23.6	341	23.5
447.dealII	223	51.3	<b>222</b>	<b>51.5</b>	222	51.5	223	51.3	<b>222</b>	<b>51.5</b>	222	51.5
450.soplex	244	34.2	<b>243</b>	<b>34.3</b>	243	34.3	244	34.2	<b>243</b>	<b>34.3</b>	243	34.3
453.povray	126	42.4	124	42.9	<b>124</b>	<b>42.8</b>	<b>106</b>	<b>50.3</b>	105	50.6	107	49.8
454.calculix	210	39.2	210	39.2	<b>210</b>	<b>39.2</b>	202	40.8	201	41.1	<b>201</b>	<b>41.0</b>
459.GemsFDTD	<b>250</b>	<b>42.4</b>	250	42.4	250	42.5	250	42.4	<b>250</b>	<b>42.4</b>	250	42.5
465.tonto	<b>298</b>	<b>33.1</b>	298	33.0	298	33.1	239	41.2	<b>238</b>	<b>41.3</b>	238	41.4
470.lbm	<b>151</b>	<b>91.1</b>	151	91.1	150	91.3	<b>151</b>	<b>91.1</b>	151	91.1	150	91.3
481.wrf	<b>196</b>	<b>57.0</b>	195	57.1	196	57.0	<b>196</b>	<b>57.0</b>	195	57.1	196	57.0
482.sphinx3	524	37.2	516	37.8	<b>522</b>	<b>37.3</b>	540	36.1	535	36.4	<b>540</b>	<b>36.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

BIOS Settings:  
Turbo Mode enabled in BIOS  
C-State enabled in BIOS

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32:/root/SPECcpu12.1/ic12.1-libs/intel64"  
OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory  
using RHEL5.5 with binutils-2.17.50.0.6-14.el5  
Stack size set to unlimited using "ulimit -s unlimited"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 46.8

IBM System x3250 M4 (Intel Xeon E3-1220L)

SPECfp\_base2006 = 45.1

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## General Notes (Continued)

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 46.8

IBM System x3250 M4 (Intel Xeon E3-1220L)

SPECfp\_base2006 = 45.1

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 46.8

IBM System x3250 M4 (Intel Xeon E3-1220L)

SPECfp\_base2006 = 45.1

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 46.8

IBM System x3250 M4 (Intel Xeon E3-1220L)

SPECfp\_base2006 = 45.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Aug-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:26:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 December 2011.