



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp®2006 = 26.7

ASUS Sabertooth 990FX (AMD FX-8150)

SPECfp_base2006 = 25.7

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Apr-2011

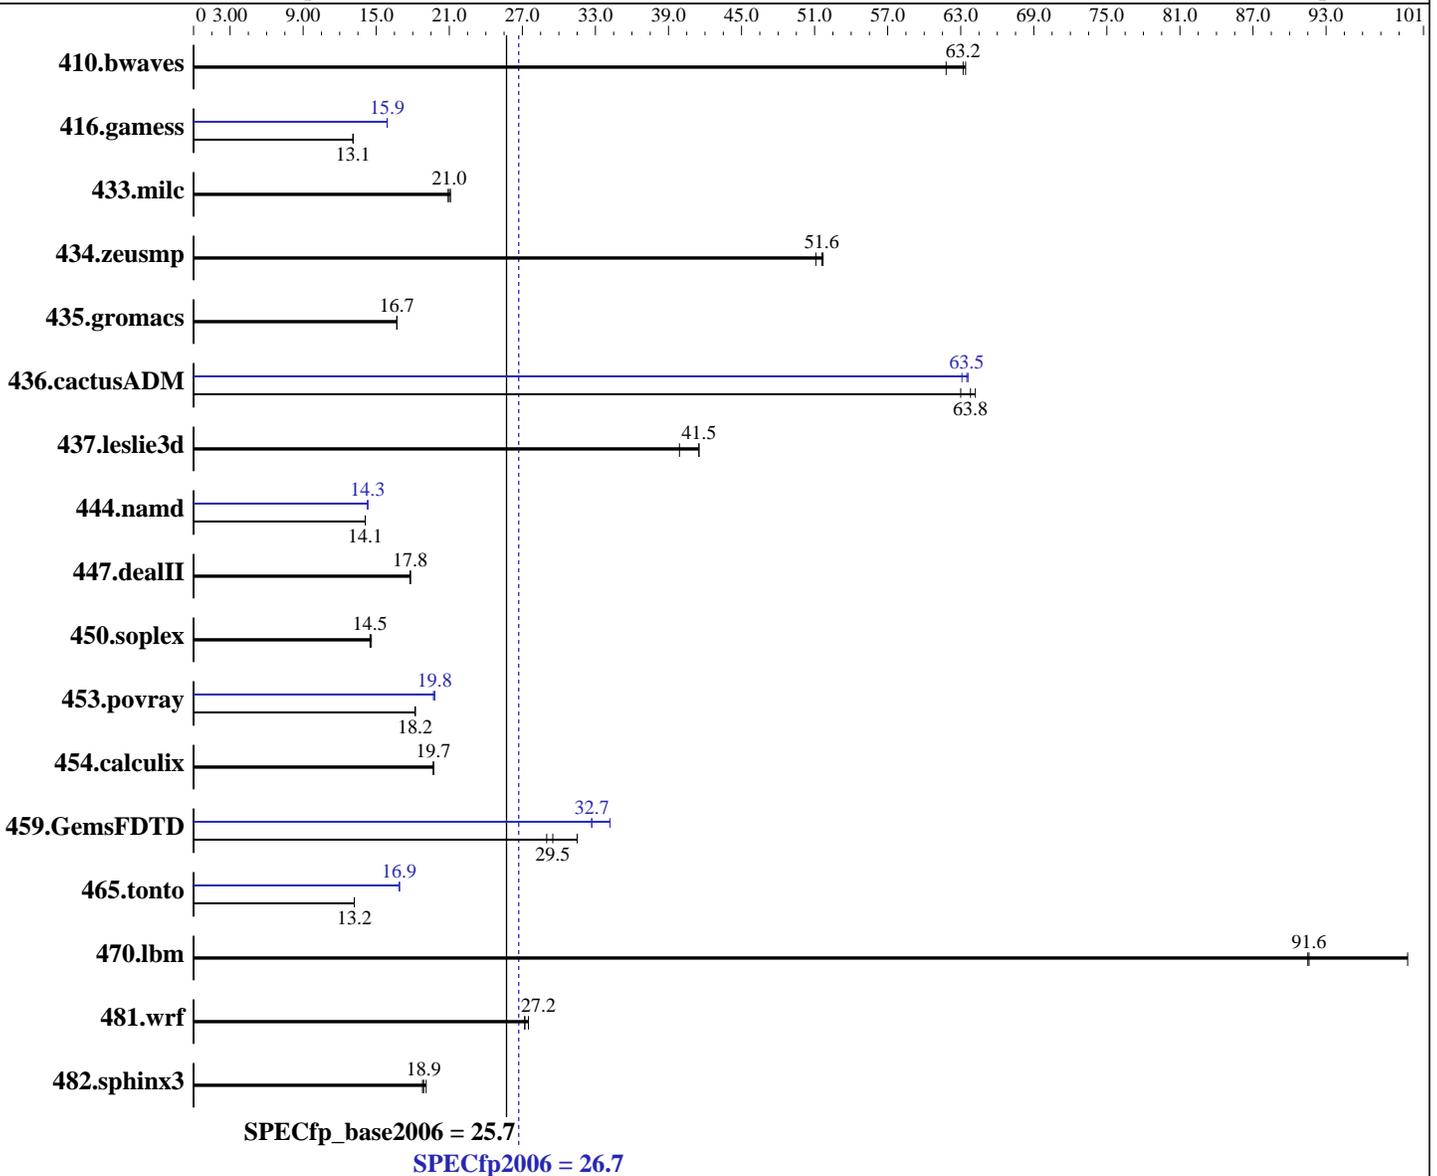

Hardware

CPU Name: AMD FX-8150
 CPU Characteristics: AMD Turbo CORE technology up to 4.20 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip
 CPU(s) orderable: 1 chip

Continued on next page

Software

Operating System: Windows 7 Ultimate SP1 (64-bit)
 Compiler: C/C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;
 Fortran: Version 12.0.3.176 of Intel Visual Fortran Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = **26.7**

ASUS Sabertooth 990FX (AMD FX-8150)

SPECfp_base2006 = **25.7**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Apr-2011

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 8 MB I+D on chip per chip

Other Cache: None

Memory: 8 GB (2 x 4 GB 2Rx4 PC3-10600U-9)

Disk Subsystem: Intel 160GB SSD

Other Hardware: None

System State: Default

Base Pointers: 32/64-bit

Peak Pointers: 32/64-bit

Other Software: SmartHeap Library Version 9.01 from
<http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>215</u>	<u>63.2</u>	220	61.8	214	63.4	<u>215</u>	<u>63.2</u>	220	61.8	214	63.4
416.gamess	<u>1493</u>	<u>13.1</u>	1493	13.1	1492	13.1	1234	15.9	<u>1234</u>	<u>15.9</u>	1233	15.9
433.milc	440	20.9	436	21.1	<u>437</u>	<u>21.0</u>	440	20.9	436	21.1	<u>437</u>	<u>21.0</u>
434.zeusmp	<u>176</u>	<u>51.6</u>	178	51.1	176	51.7	<u>176</u>	<u>51.6</u>	178	51.1	176	51.7
435.gromacs	<u>429</u>	<u>16.7</u>	429	16.7	428	16.7	<u>429</u>	<u>16.7</u>	429	16.7	428	16.7
436.cactusADM	<u>187</u>	<u>63.8</u>	190	63.0	186	64.2	188	63.6	190	63.1	<u>188</u>	<u>63.5</u>
437.leslie3d	226	41.5	235	39.9	<u>226</u>	<u>41.5</u>	226	41.5	235	39.9	<u>226</u>	<u>41.5</u>
444.namd	568	14.1	568	14.1	<u>568</u>	<u>14.1</u>	562	14.3	562	14.3	<u>562</u>	<u>14.3</u>
447.dealII	643	17.8	643	17.8	<u>643</u>	<u>17.8</u>	643	17.8	643	17.8	<u>643</u>	<u>17.8</u>
450.soplex	573	14.6	576	14.5	<u>576</u>	<u>14.5</u>	573	14.6	576	14.5	<u>576</u>	<u>14.5</u>
453.povray	293	18.2	293	18.2	<u>293</u>	<u>18.2</u>	269	19.7	268	19.8	<u>269</u>	<u>19.8</u>
454.calculix	<u>419</u>	<u>19.7</u>	419	19.7	419	19.7	<u>419</u>	<u>19.7</u>	419	19.7	419	19.7
459.GemsFDTD	<u>360</u>	<u>29.5</u>	337	31.5	365	29.0	325	32.7	<u>324</u>	<u>32.7</u>	310	34.2
465.tonto	743	13.2	745	13.2	<u>744</u>	<u>13.2</u>	582	16.9	582	16.9	<u>582</u>	<u>16.9</u>
470.lbm	150	91.5	138	99.7	<u>150</u>	<u>91.6</u>	150	91.5	138	99.7	<u>150</u>	<u>91.6</u>
481.wrf	<u>410</u>	<u>27.2</u>	406	27.5	410	27.2	<u>410</u>	<u>27.2</u>	406	27.5	410	27.2
482.sphinx3	1022	19.1	<u>1030</u>	<u>18.9</u>	1037	18.8	1022	19.1	<u>1030</u>	<u>18.9</u>	1037	18.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with an ATI HD 6990 discrete graphics card

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.7

ASUS Sabertooth 990FX (AMD FX-8150)

SPECfp_base2006 = 25.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Apr-2011

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99
C++ benchmarks:
icl -Qvc9
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000
C++ benchmarks:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 -Qprec-div- /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE
Fortran benchmarks:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.7

ASUS Sabertooth 990FX (AMD FX-8150)

SPECfp_base2006 = 25.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Apr-2011

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99
C++ benchmarks:
icl -Qvc9
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes
C++ benchmarks:
444.namd: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE
447.dealII: basepeak = yes
450.soplex: basepeak = yes
453.povray: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.7

ASUS Sabertooth 990FX (AMD FX-8150)

SPECfp_base2006 = 25.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Apr-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

465.tonto: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2
-Qauto-ilp32 /F1000000000

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.7

ASUS Sabertooth 990FX (AMD FX-8150)

SPECfp_base2006 = 25.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:08:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 December 2011.