



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>2006 = **91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp\_base2006 = **85.9**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

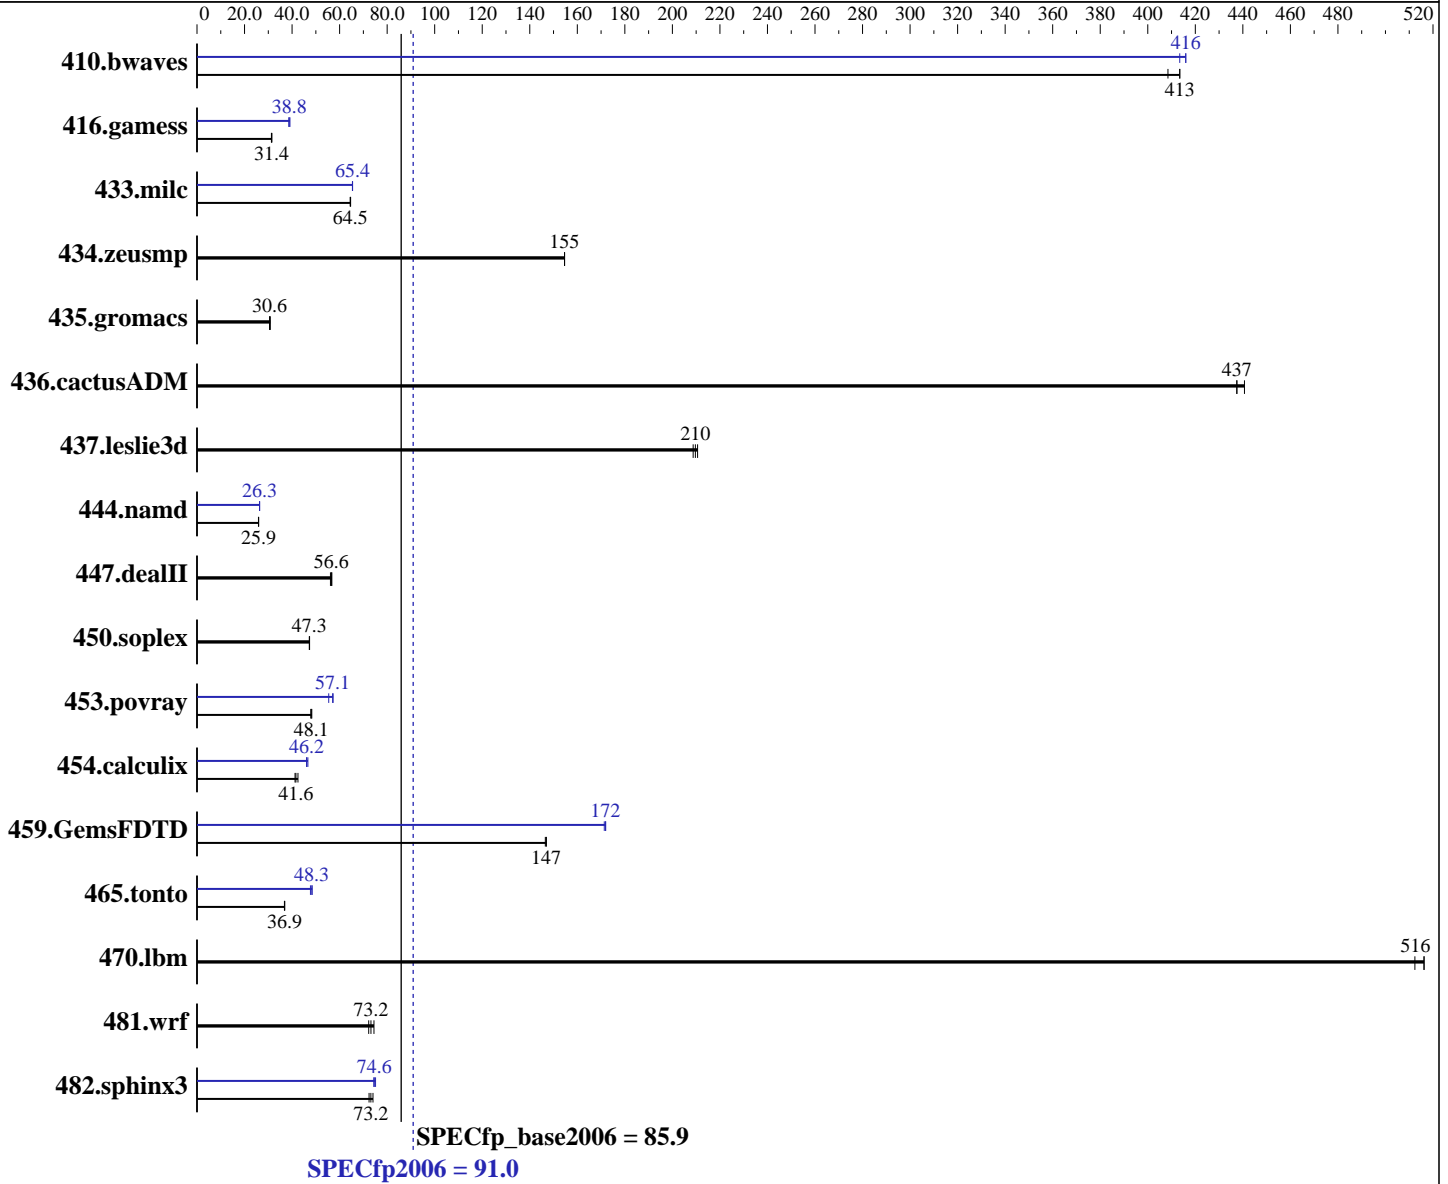

### Hardware

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp\_base2006 = **85.9**

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.3	408	32.9	413	<u>32.9</u>	<u>413</u>	<u>32.7</u>	<u>416</u>	32.7	416	32.9	413
416.gamess	622	31.5	<u>624</u>	<u>31.4</u>	625	31.3	507	38.6	<u>505</u>	<u>38.8</u>	501	39.1
433.milc	<u>142</u>	<u>64.5</u>	142	64.6	142	64.5	<u>140</u>	<u>65.4</u>	140	65.5	140	65.4
434.zeusmp	58.8	155	58.8	155	<u>58.8</u>	<u>155</u>	58.8	155	58.8	155	<u>58.8</u>	<u>155</u>
435.gromacs	232	30.8	<u>233</u>	<u>30.6</u>	234	30.5	232	30.8	<u>233</u>	<u>30.6</u>	234	30.5
436.cactusADM	27.1	441	27.3	437	<u>27.3</u>	<u>437</u>	27.1	441	27.3	437	<u>27.3</u>	<u>437</u>
437.leslie3d	44.6	211	45.0	209	<u>44.8</u>	<u>210</u>	44.6	211	45.0	209	<u>44.8</u>	<u>210</u>
444.namd	309	25.9	310	25.9	<u>310</u>	<u>25.9</u>	304	26.3	<u>305</u>	<u>26.3</u>	305	26.3
447.dealII	202	56.7	204	56.1	<u>202</u>	<u>56.6</u>	202	56.7	204	56.1	<u>202</u>	<u>56.6</u>
450.soplex	<u>176</u>	<u>47.3</u>	176	47.4	176	47.3	<u>176</u>	<u>47.3</u>	176	47.4	176	47.3
453.povray	110	48.3	<u>111</u>	<u>48.1</u>	111	47.9	<u>93.2</u>	<u>57.1</u>	92.9	57.3	96.0	55.4
454.calculix	194	42.5	<u>198</u>	<u>41.6</u>	200	41.2	177	46.7	179	46.1	<u>179</u>	<u>46.2</u>
459.GemsFDTD	72.4	147	72.2	147	<u>72.2</u>	<u>147</u>	61.9	171	61.7	172	<u>61.7</u>	<u>172</u>
465.tonto	<u>267</u>	<u>36.9</u>	268	36.8	267	36.9	<u>204</u>	<u>48.3</u>	203	48.5	206	47.7
470.lbm	<u>26.6</u>	<u>516</u>	26.6	516	26.8	512	<u>26.6</u>	<u>516</u>	26.6	516	26.8	512
481.wrf	<u>153</u>	<u>73.2</u>	155	72.2	150	74.5	<u>153</u>	<u>73.2</u>	155	72.2	150	74.5
482.sphinx3	269	72.4	263	74.0	<u>266</u>	<u>73.2</u>	262	74.4	259	75.1	<u>261</u>	<u>74.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

System Profile set to Performance in BIOS  
 Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on unsvr Mon Feb 6 16:23:44 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

**SPECfp\_base2006 = 85.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Feb-2012

### Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      132089856 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 11 (x86\_64)

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 2

```

uname -a:

```

Linux unsvr 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 6 10:51 last=S

SPEC is set to: /root/CPU2006-1.2

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdal        ext3     265G      66G  185G  27% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "16"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/transparent\_hugepage/enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

**SPECfp\_base2006 = 85.9**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Feb-2012  
**Hardware Availability:** Mar-2012  
**Software Availability:** Feb-2012

## General Notes (Continued)

Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
The Dell PowerEdge R620 and  
the Bull NovaScale R440 F3 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R620 model.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

**SPECfp\_base2006 = 85.9**

**CPU2006 license:** 20

**Test date:** Feb-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Mar-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

**SPECfp\_base2006 = 85.9**

**CPU2006 license:** 20

**Test date:** Feb-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Mar-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 91.0**

NovaScale R440 F3 (Intel Xeon E5-2690, 2.90 GHz)

**SPECfp\_base2006 = 85.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 03:52:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 March 2012.