



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp<sup>®</sup>2006 = **84.3**

SuperServer 6027R-WRF (X9DRW-iF, Intel E5-2670)

SPECfp\_base2006 = **80.1**

CPU2006 license: 001176


Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2011

Tested by: Supermicro

Software Availability: Dec-2011

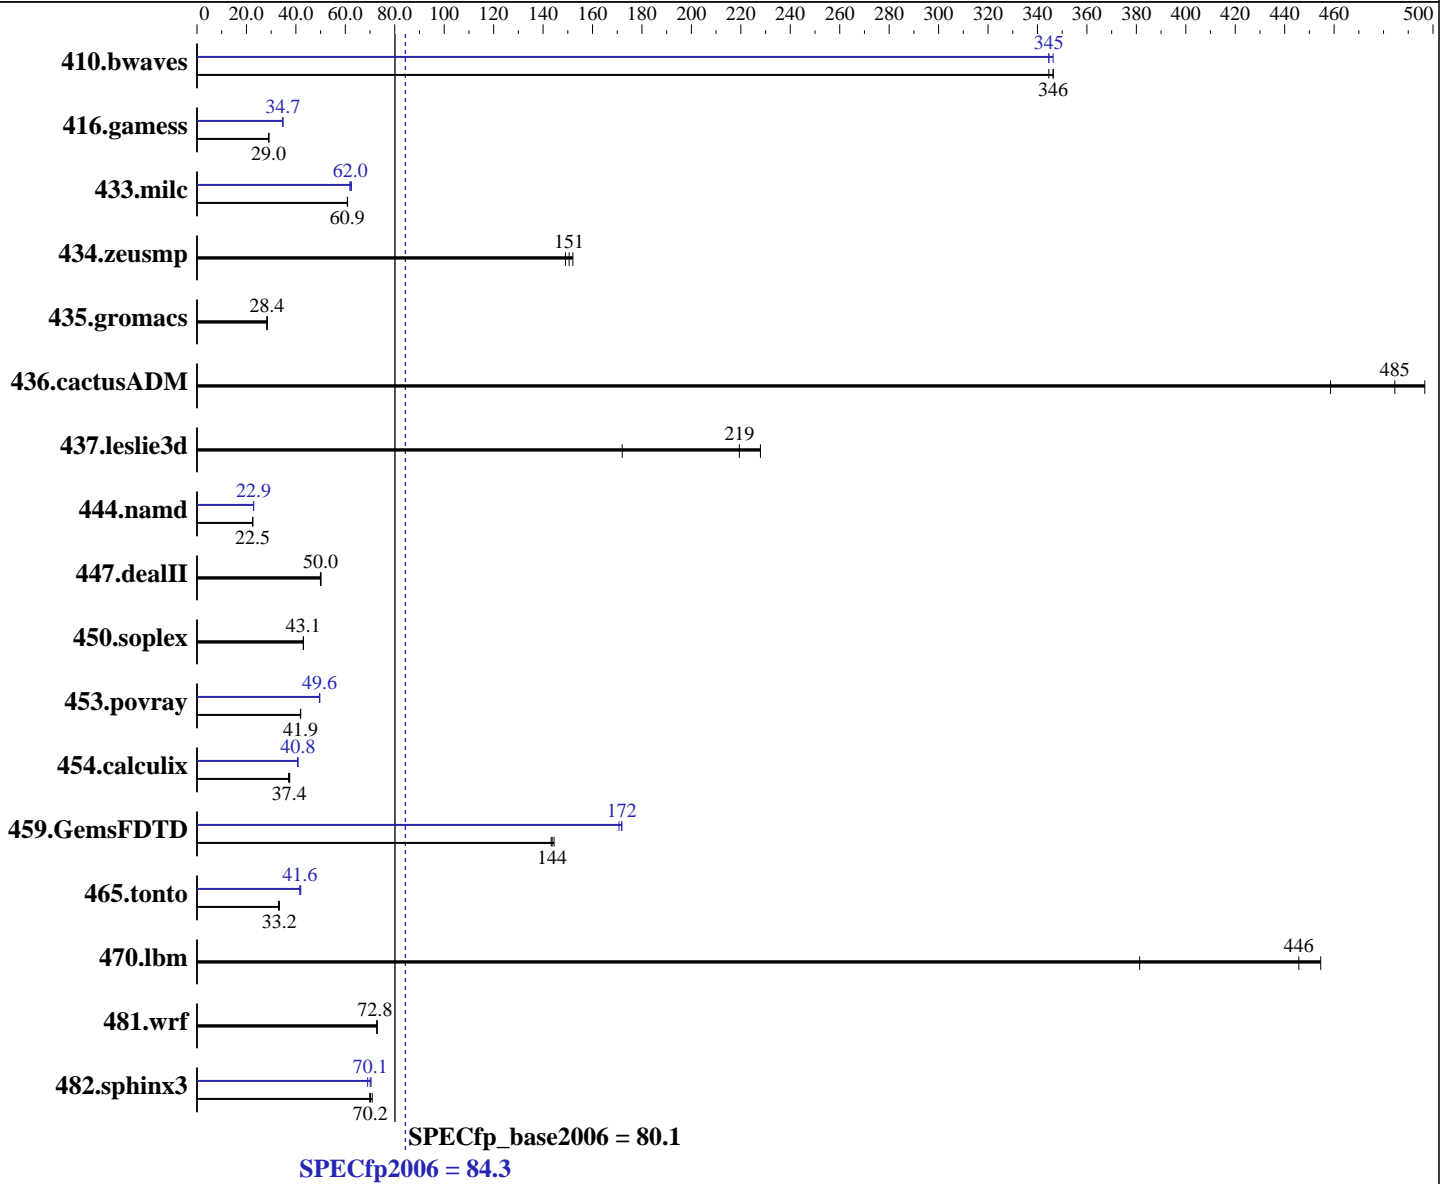

**Hardware**

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **84.3**

SuperServer 6027R-WRF (X9DRW-iF, Intel E5-2670)

SPECfp\_base2006 = **80.1**

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2011

Tested by: Supermicro

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	39.4	345	39.2	346	<b><u>39.2</u></b>	<b><u>346</u></b>	<b><u>39.4</u></b>	<b><u>345</u></b>	39.2	346	39.4	345
416.gamess	<b><u>674</u></b>	<b><u>29.0</u></b>	674	29.1	676	29.0	563	34.8	<b><u>564</u></b>	<b><u>34.7</u></b>	565	34.6
433.milc	<b><u>151</u></b>	<b><u>60.9</u></b>	151	60.8	151	60.9	<b><u>148</u></b>	<b><u>62.0</u></b>	148	61.9	147	62.5
434.zeusmp	59.8	152	<b><u>60.4</u></b>	<b><u>151</u></b>	61.0	149	59.8	152	<b><u>60.4</u></b>	<b><u>151</u></b>	61.0	149
435.gromacs	<b><u>252</u></b>	<b><u>28.4</u></b>	251	28.4	253	28.2	<b><u>252</u></b>	<b><u>28.4</u></b>	251	28.4	253	28.2
436.cactusADM	24.1	497	<b><u>24.7</u></b>	<b><u>485</u></b>	26.1	459	24.1	497	<b><u>24.7</u></b>	<b><u>485</u></b>	26.1	459
437.leslie3d	<b><u>42.8</u></b>	<b><u>219</u></b>	41.2	228	54.6	172	<b><u>42.8</u></b>	<b><u>219</u></b>	41.2	228	54.6	172
444.namd	<b><u>356</u></b>	<b><u>22.5</u></b>	356	22.5	356	22.5	350	22.9	<b><u>350</u></b>	<b><u>22.9</u></b>	350	22.9
447.dealII	229	49.9	228	50.2	<b><u>229</u></b>	<b><u>50.0</u></b>	229	49.9	228	50.2	<b><u>229</u></b>	<b><u>50.0</u></b>
450.soplex	194	43.0	<b><u>194</u></b>	<b><u>43.1</u></b>	194	43.1	194	43.0	<b><u>194</u></b>	<b><u>43.1</u></b>	194	43.1
453.povray	127	41.9	127	41.8	<b><u>127</u></b>	<b><u>41.9</u></b>	107	49.7	<b><u>107</u></b>	<b><u>49.6</u></b>	107	49.5
454.calculix	220	37.5	<b><u>221</u></b>	<b><u>37.4</u></b>	223	37.0	<b><u>202</u></b>	<b><u>40.8</u></b>	202	40.8	202	40.8
459.GemsFDTD	74.1	143	73.5	144	<b><u>73.9</u></b>	<b><u>144</u></b>	61.8	172	<b><u>61.8</u></b>	<b><u>172</u></b>	62.2	171
465.tonto	299	33.0	<b><u>296</u></b>	<b><u>33.2</u></b>	296	33.3	236	41.6	<b><u>236</u></b>	<b><u>41.6</u></b>	234	42.0
470.lbm	36.0	381	30.2	455	<b><u>30.8</u></b>	<b><u>446</u></b>	36.0	381	30.2	455	<b><u>30.8</u></b>	<b><u>446</u></b>
481.wrf	153	72.8	153	72.9	<b><u>153</u></b>	<b><u>72.8</u></b>	153	72.8	153	72.9	<b><u>153</u></b>	<b><u>72.8</u></b>
482.sphinx3	275	70.9	<b><u>278</u></b>	<b><u>70.2</u></b>	279	69.9	277	70.4	<b><u>278</u></b>	<b><u>70.1</u></b>	282	69.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/test/cpu2006/libs/32:/home/test/cpu2006/libs/64"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 84.3**

SuperServer 6027R-WRF (X9DRW-iF, Intel E5-2670)

**SPECfp\_base2006 = 80.1**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Mar-2012  
**Hardware Availability:** Mar-2011  
**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = 84.3

SuperServer 6027R-WRF (X9DRW-iF, Intel E5-2670)

SPECfp\_base2006 = 80.1

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2011

Tested by: Supermicro

Software Availability: Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 84.3

SuperServer 6027R-WRF (X9DRW-iF, Intel E5-2670)

SPECfp\_base2006 = 80.1

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2011

Tested by: Supermicro

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 07:12:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 April 2012.