



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp[®]2006 = **96.0**

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = **85.2**

CPU2006 license: 6


Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

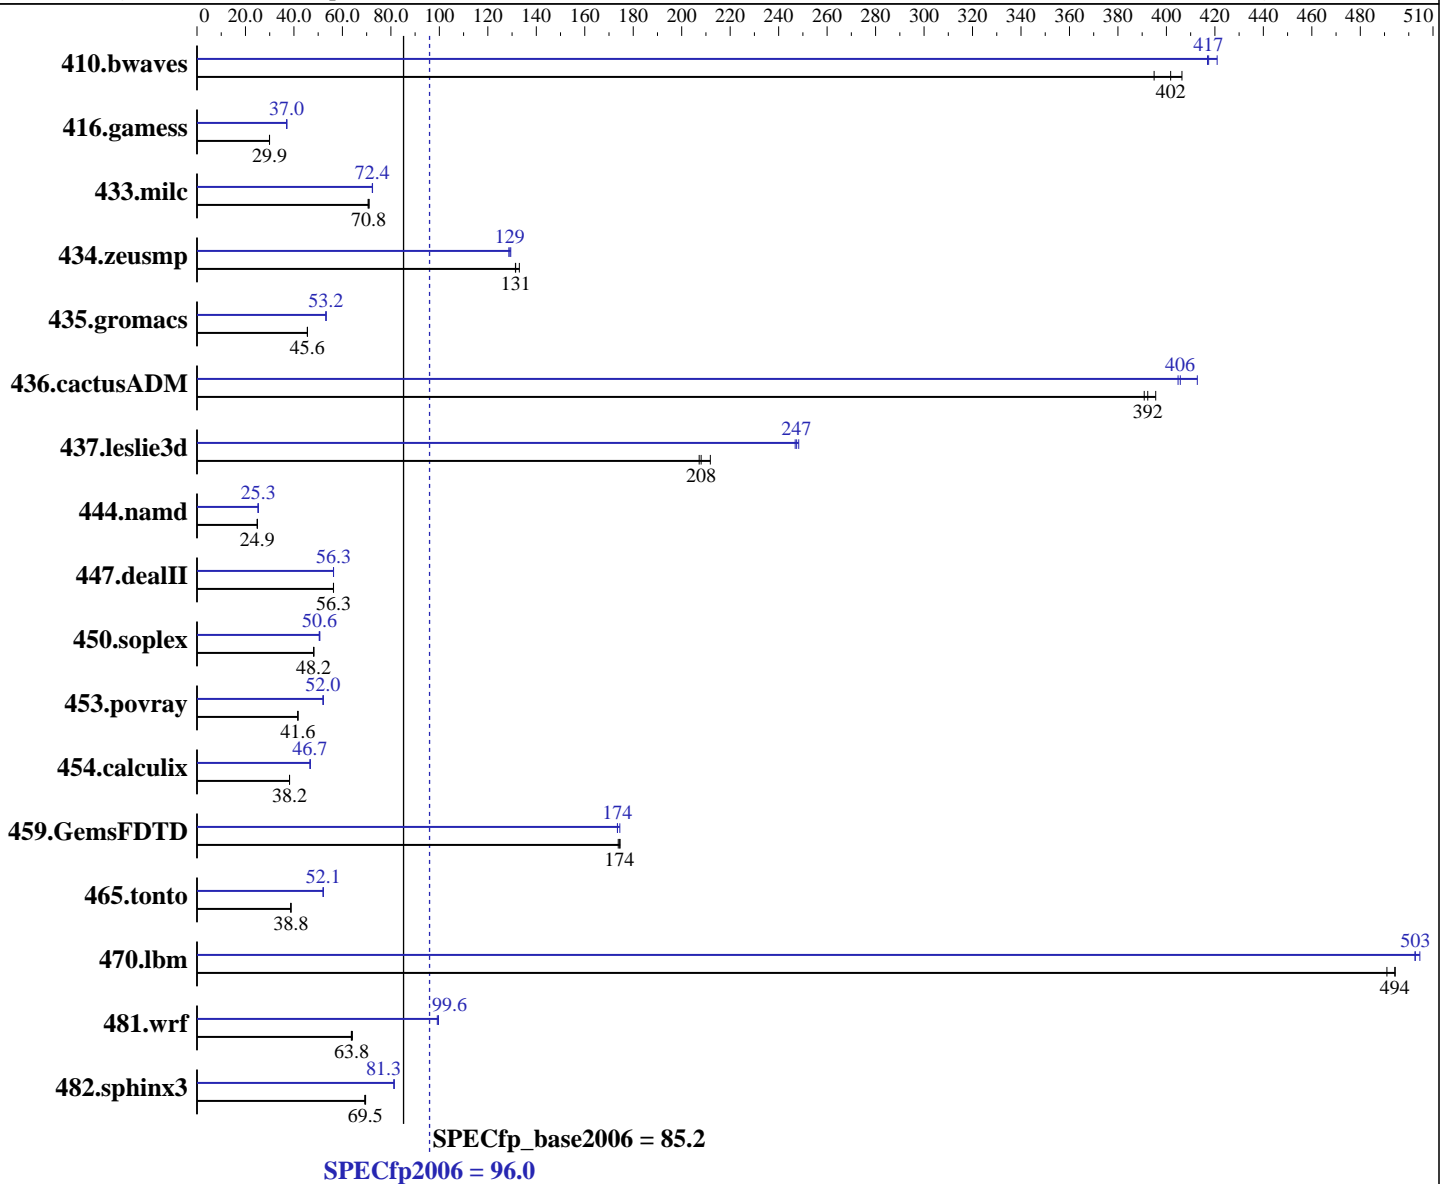

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Solaris 11 11/11 (SRU 02)
 Compiler: C/C++/Fortran: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)
 Auto Parallel: Yes
 File System: zfs (with raidz)
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = **96.0**

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = **85.2**

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 3 x 300 GB 10K RPM SAS
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.8	402	33.4	406	34.4	395	32.6	417	32.3	421	32.6	417
416.gamess	654	29.9	654	29.9	655	29.9	529	37.0	529	37.0	529	37.0
433.milc	130	70.6	129	71.0	130	70.8	127	72.4	127	72.4	127	72.4
434.zeusmp	68.4	133	69.3	131	69.2	131	70.5	129	70.3	129	70.7	129
435.gromacs	157	45.6	157	45.5	157	45.6	134	53.2	134	53.2	134	53.2
436.cactusADM	30.5	392	30.6	391	30.2	396	29.0	413	29.5	406	29.5	405
437.leslie3d	45.4	207	45.2	208	44.4	212	38.1	247	38.0	247	37.9	248
444.namd	322	24.9	322	24.9	322	24.9	318	25.3	318	25.3	318	25.3
447.dealII	203	56.3	203	56.3	203	56.3	203	56.3	203	56.3	203	56.3
450.soplex	173	48.2	173	48.2	173	48.1	165	50.6	165	50.7	165	50.4
453.povray	128	41.6	128	41.6	128	41.6	102	52.0	102	52.0	102	52.1
454.calculix	216	38.2	216	38.2	216	38.2	177	46.7	177	46.7	177	46.7
459.GemsFDTD	61.0	174	60.8	175	60.9	174	60.8	174	61.2	174	61.2	173
465.tonto	254	38.8	254	38.7	254	38.8	189	52.1	189	52.1	189	52.1
470.lbm	28.0	491	27.8	494	27.8	494	27.3	503	27.2	505	27.3	503
481.wrf	174	64.1	175	63.7	175	63.8	112	99.6	113	99.2	112	99.6
482.sphinx3	282	69.2	280	69.6	280	69.5	240	81.3	240	81.3	240	81.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used to bind processes to CPU threads with pbind(1)

Operating System Notes

ulimit -s 10000 (shell): increases stack

```

/etc/system parameters
  autoup=1000
  zfs:zfs_arc_max=0x400000000
  zfs:zfs_arc_min=0x400000000
  ncsiz=0x10000
  lpg_alloc_prefer=1

```

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 96.0

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = 85.2

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Mar-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

Platform Notes

Default BIOS Settings were used, except:
Energy Performance set to Performance

Oracle's Sun Blade X6270 M3 is now known as the Sun Blade X3-2B.

```
Sysinfo program /benchpool/data1/cpu2006v1.2/Docs/sysinfo
: 6775 2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-85 Wed Mar 28 17:23:53 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo -pv
Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2893 MHz)
```

```
/usr/sbin/psrinfo -p: 2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l: 16 cores
/usr/sbin/psrinfo | wc -l: 32 threads
```

```
/usr/sbin/prtconf | grep "Memory size:": 131038 Megabytes
```

```
/etc/release:
```

```
Oracle Solaris 11 11/11 X86
```

```
uname -a:
SunOS bur398-85 5.11 11.0 i86pc i386 i86pc
```

```
disk: df -h
Filesystem      Size  Used  Available Capacity  Mounted on
benchpool/data1 545G  15G   530G      3%   /benchpool/data1
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
MTEXCLUSIVE = "Y"
OMP_NUM_THREADS = "16"
SUNW_MP_PROCBIND = "true"
SUNW_MP_THR_IDLE = "spin"

Base Compiler Invocation

C benchmarks:
cc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 96.0

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = 85.2

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

Base Compiler Invocation (Continued)

C++ benchmarks:
cc

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-g -fast -xipo=2 -m64 -xautopar -xreduction -xalias_level=std

C++ benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4

Fortran benchmarks:
-fast -xipo=2 -m64 -xautopar -xreduction -xpagesize=2M

Benchmarks using both Fortran and C:
-g -fast(cc) -xipo=2 -m64 -xautopar -xreduction -xalias_level=std
-fast(f90) -xpagesize=2M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 96.0

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = 85.2

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Portability Flags

436.cactusADM: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_WORDS_LITTLEENDIAN

Peak Optimization Flags

C benchmarks:

433.milc: -g -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std
-xautopar -xreduction -lmtmalloc

470.lbm: -g -fast -Wu,-nontemporal -xprefetch_level=3 -xipo=2 -m64
-xautopar -xreduction -xpagesize=4K -lmtmalloc

482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xalias_level=std -xrestrict
-xprefetch=no%auto -xautopar -xreduction
-W2,-Aparallel:nthreads=8

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xO3
-xprefetch=no%auto -m64 -xpagesize=2M
-xalias_level=compatible -library=stlport4

447.dealII: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-m64 -Qoption iropt -Rtile

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 96.0

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = 85.2

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

```
453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto
-xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-qoption iropt -Atile:skew=on -qoption iropt -Ainline:cs=700
-library=stlport4
```

Fortran benchmarks:

```
410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=4K -xautopar -xreduction
```

```
416.gamess: -fast -xipo=2 -m64 -xpagesize=2M -xunroll=1
-xvector=no%simd -xprefetch=no%auto
```

```
434.zeusmp: -fast -xipo=2 -m64 -xpagesize=2M -xautopar -xreduction
```

```
437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xautopar -xreduction -lmtmalloc
```

459.GemsFDTD: Same as 434.zeusmp

```
465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=2M -O3
-m64 -stackvar -xprefetch=no%auto -xalias -xautopar
-xreduction -Qoption iropt -Aparallel:nthreads=8 -lfast_r
```

Benchmarks using both Fortran and C:

```
435.gromacs: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -xpagesize=2M -fsimple=2
-Qoption ube -fsimple=3 -xautopar -xreduction
-Qoption iropt -Aparallel:nthreads=8 -lmtmalloc
```

```
436.cactusADM: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90) -m64
-xautopar -xreduction -xpagesize=2M -lumem -lmvec
```

```
454.calculix: -g -fast(cc) -fast(f90) -xipo=0 -m64 -xpagesize=2M
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption ube -xprefetch_mult=24 -xunroll=2
```

```
481.wrf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90) -O4
-xchip=nehalem -xarch=sse4_2 -xipo=2 -m64 -xpagesize=2M
-xprefetch=no%auto -xautopar -xreduction
-Qoption iropt -Aparallel:nthreads=8
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 96.0

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_base2006 = 85.2

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:22:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.