



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

**SPECfp<sup>®</sup>2006 = 60.2**

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

**SPECfp\_base2006 = 58.3**

CPU2006 license: 9019


Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

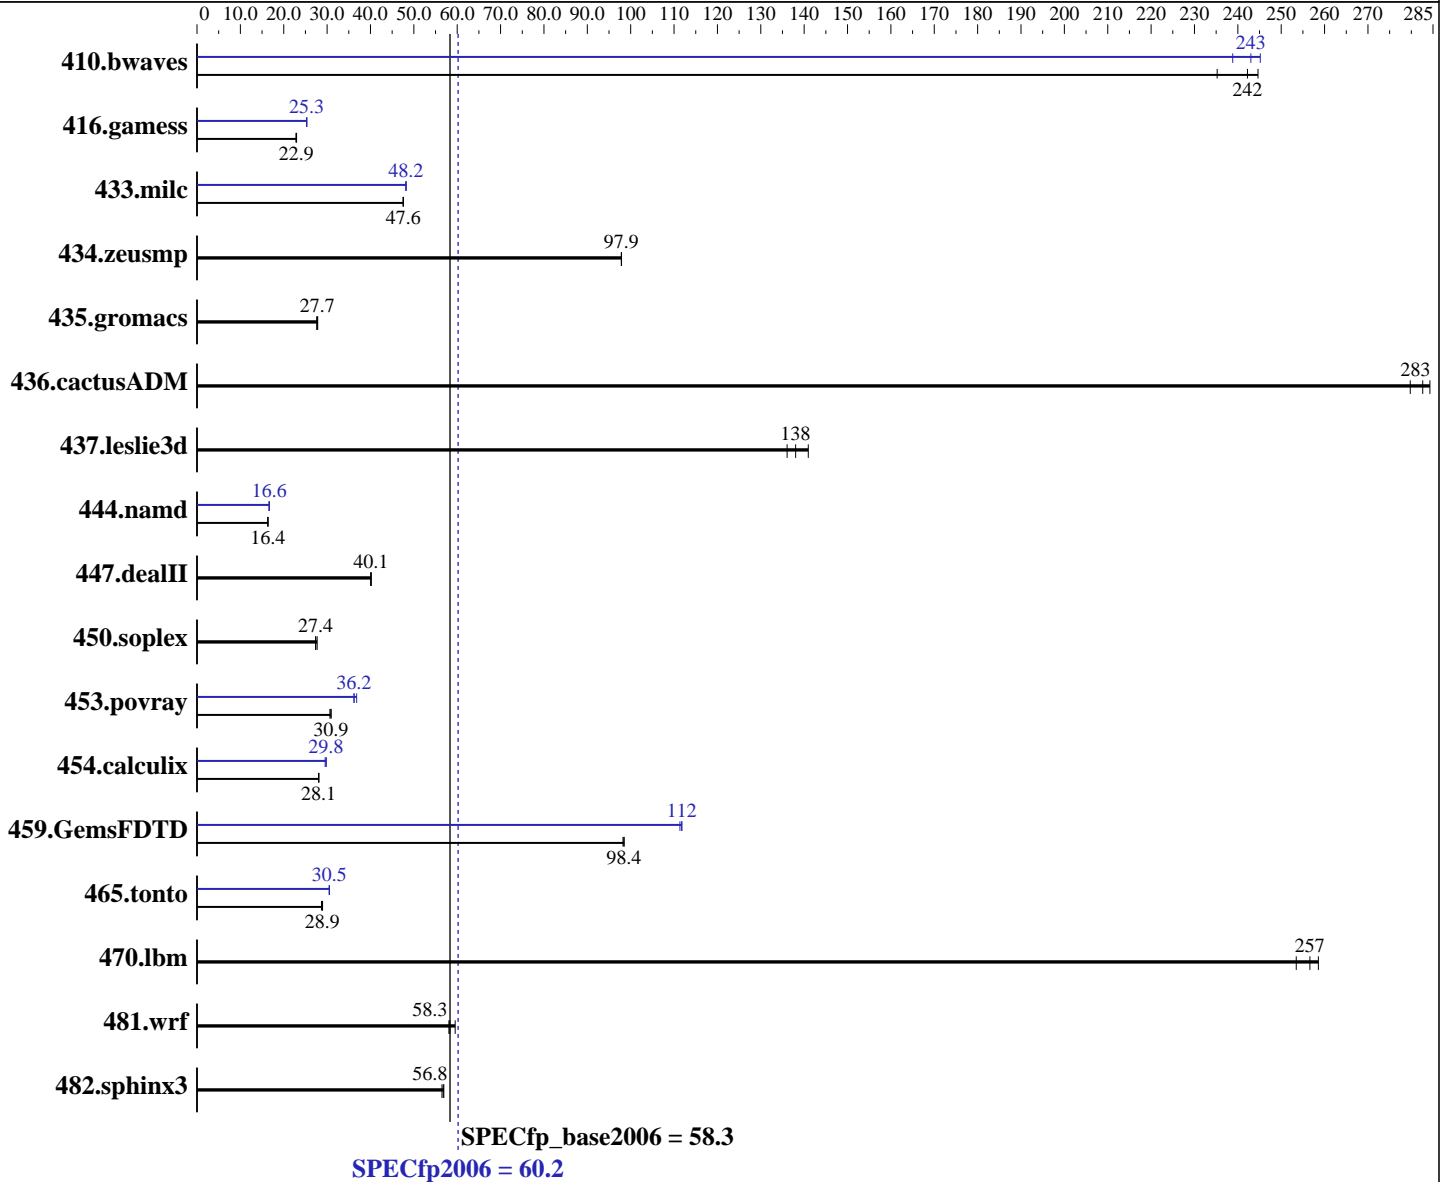

### Hardware

CPU Name: Intel Xeon E5-2609  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp2006 = **60.2**

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECfp\_base2006 = **58.3**

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1067 MHz and CL7)  
 Disk Subsystem: 1 X 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	57.8	235	<b>56.1</b>	<b>242</b>	55.5	245	<b>55.9</b>	<b>243</b>	55.4	245	56.9	239
416.gamess	853	23.0	<b>855</b>	<b>22.9</b>	857	22.8	774	25.3	<b>774</b>	<b>25.3</b>	774	25.3
433.milc	193	47.6	<b>193</b>	<b>47.6</b>	193	47.5	191	48.2	<b>190</b>	<b>48.2</b>	190	48.2
434.zeusmp	93.0	97.9	<b>93.0</b>	<b>97.9</b>	93.0	97.8	93.0	97.9	<b>93.0</b>	<b>97.9</b>	93.0	97.8
435.gromacs	<b>258</b>	<b>27.7</b>	257	27.8	259	27.6	<b>258</b>	<b>27.7</b>	257	27.8	259	27.6
436.cactusADM	42.0	284	42.7	280	<b>42.3</b>	<b>283</b>	42.0	284	42.7	280	<b>42.3</b>	<b>283</b>
437.leslie3d	66.7	141	<b>68.1</b>	<b>138</b>	69.1	136	66.7	141	<b>68.1</b>	<b>138</b>	69.1	136
444.namd	<b>490</b>	<b>16.4</b>	491	16.3	490	16.4	482	16.7	<b>482</b>	<b>16.6</b>	482	16.6
447.dealII	286	40.1	<b>285</b>	<b>40.1</b>	285	40.2	286	40.1	<b>285</b>	<b>40.1</b>	285	40.2
450.soplex	301	27.7	305	27.3	<b>305</b>	<b>27.4</b>	301	27.7	305	27.3	<b>305</b>	<b>27.4</b>
453.povray	174	30.6	<b>172</b>	<b>30.9</b>	172	30.9	147	36.2	145	36.8	<b>147</b>	<b>36.2</b>
454.calculix	294	28.1	294	28.1	<b>294</b>	<b>28.1</b>	<b>277</b>	<b>29.8</b>	277	29.8	279	29.5
459.GemsFDTD	108	98.5	<b>108</b>	<b>98.4</b>	108	98.2	<b>94.9</b>	<b>112</b>	95.3	111	94.9	112
465.tonto	343	28.7	340	29.0	<b>340</b>	<b>28.9</b>	322	30.5	323	30.5	<b>322</b>	<b>30.5</b>
470.lbm	<b>53.5</b>	<b>257</b>	53.1	259	54.2	253	<b>53.5</b>	<b>257</b>	53.1	259	54.2	253
481.wrf	192	58.1	<b>192</b>	<b>58.3</b>	188	59.5	192	58.1	<b>192</b>	<b>58.3</b>	188	59.5
482.sphinx3	345	56.5	<b>343</b>	<b>56.8</b>	342	56.9	345	56.5	<b>343</b>	<b>56.8</b>	342	56.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Processor Power State C6 set to Disabled

Processor Power State C1 Enhanced set to Disabled

Power Technology set to Custom

Energy Performance set to Performance

DRAM Clock Throttling set to Performance

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Thu Apr 19 08:40:49 2012

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 60.2

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECfp\_base2006 = 58.3

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2609 0 @ 2.40GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 4
  siblings     : 4
  physical 0   : cores 0 1 2 3
  physical 1   : cores 0 1 2 3
  cache size   : 10240 KB

```

```

From /proc/meminfo
MemTotal:      132103544 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 19 08:33

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1       ext4      275G  9.9G 251G   4% /

```

```

Additional information from dmidecode:
Memory:
16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 60.2

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECfp\_base2006 = 58.3

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

OMP\_NUM\_THREADS = "8"

Intel HT Technology = Disable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 60.2

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECfp\_base2006 = 58.3

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 60.2

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECfp\_base2006 = 58.3

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

**SPECfp2006 = 60.2**

Cisco UCS C220 M3 (Intel Xeon E5-2609, 2.40 GHz)

**SPECfp\_base2006 = 58.3**

**CPU2006 license:** 9019

**Test date:** Apr-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:59:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 May 2012.