



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp®2006 = 84.4

SuperServer 1017GR-TF (X9SRG-F, Intel E5-1660)

SPECfp\_base2006 = 81.4

CPU2006 license: 001176


Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

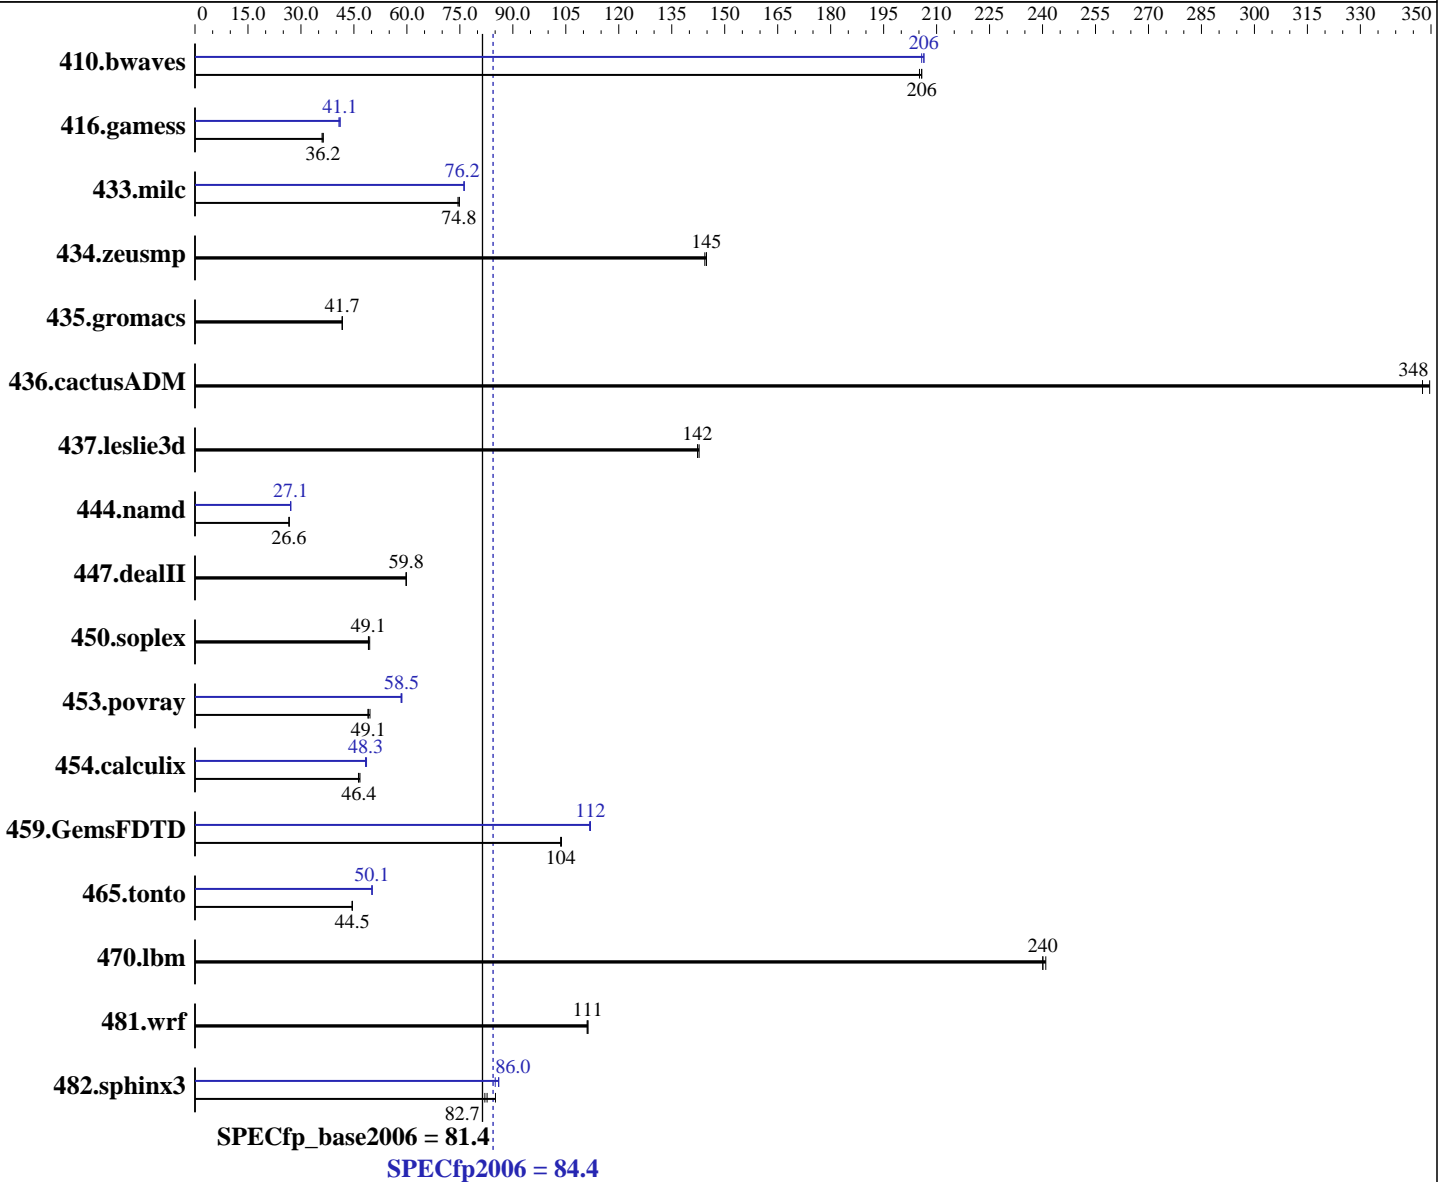

### Hardware

CPU Name: Intel Xeon E5-1660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **84.4**

SuperServer 1017GR-TF (X9SRG-F, Intel E5-1660)

SPECfp\_base2006 = **81.4**

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 160 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>66.0</b>	<b>206</b>	66.0	206	66.2	205	<b>65.8</b>	<b>206</b>	65.8	206	66.0	206
416.gamess	<b>540</b>	<b>36.2</b>	544	36.0	539	36.3	<b>477</b>	<b>41.1</b>	477	41.1	480	40.8
433.milc	123	74.9	123	74.5	<b>123</b>	<b>74.8</b>	<b>120</b>	<b>76.2</b>	120	76.2	120	76.2
434.zeusmp	<b>62.8</b>	<b>145</b>	63.0	144	62.8	145	<b>62.8</b>	<b>145</b>	63.0	144	62.8	145
435.gromacs	171	41.7	171	41.7	<b>171</b>	<b>41.7</b>	171	41.7	171	41.7	<b>171</b>	<b>41.7</b>
436.cactusADM	<b>34.4</b>	<b>348</b>	34.2	350	34.4	348	<b>34.4</b>	<b>348</b>	34.2	350	34.4	348
437.leslie3d	<b>66.0</b>	<b>142</b>	66.0	142	65.8	143	<b>66.0</b>	<b>142</b>	66.0	142	65.8	143
444.namd	<b>301</b>	<b>26.6</b>	301	26.6	301	26.7	296	27.1	296	27.1	<b>296</b>	<b>27.1</b>
447.dealII	191	59.8	191	59.8	<b>191</b>	<b>59.8</b>	191	59.8	191	59.8	<b>191</b>	<b>59.8</b>
450.soplex	<b>170</b>	<b>49.1</b>	169	49.5	170	49.1	<b>170</b>	<b>49.1</b>	169	49.5	170	49.1
453.povray	109	49.0	<b>108</b>	<b>49.1</b>	107	49.6	90.8	58.6	<b>91.0</b>	<b>58.5</b>	91.2	58.4
454.calculix	178	46.3	<b>178</b>	<b>46.4</b>	177	46.7	171	48.3	<b>171</b>	<b>48.3</b>	170	48.6
459.GemsFDTD	102	104	102	104	<b>102</b>	<b>104</b>	94.9	112	94.7	112	<b>94.7</b>	<b>112</b>
465.tonto	221	44.6	221	44.5	<b>221</b>	<b>44.5</b>	196	50.1	196	50.2	<b>196</b>	<b>50.1</b>
470.lbm	<b>57.2</b>	<b>240</b>	57.0	241	57.2	240	<b>57.2</b>	<b>240</b>	57.0	241	57.2	240
481.wrf	<b>100</b>	<b>111</b>	101	111	100	111	<b>100</b>	<b>111</b>	101	111	100	111
482.sphinx3	237	82.1	229	85.1	<b>236</b>	<b>82.7</b>	227	86.0	<b>227</b>	<b>86.0</b>	229	85.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "6"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 84.4**

SuperServer 1017GR-TF (X9SRG-F, Intel E5-1660)

**SPECfp\_base2006 = 81.4**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2012  
**Hardware Availability:** Mar-2012  
**Software Availability:** Oct-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 84.4**

SuperServer 1017GR-TF (X9SRG-F, Intel E5-1660)

**SPECfp\_base2006 = 81.4**

**CPU2006 license:** 001176

**Test date:** Jan-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 84.4

SuperServer 1017GR-TF (X9SRG-F, Intel E5-1660)

SPECfp\_base2006 = 81.4

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:58:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 May 2012.