



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp®2006 = 54.6

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220LV2)

SPECfp\_base2006 = 53.3

CPU2006 license: 001176


Test date: May-2012

Test sponsor: Supermicro

Hardware Availability: May-2012

Tested by: Supermicro

Software Availability: Dec-2011

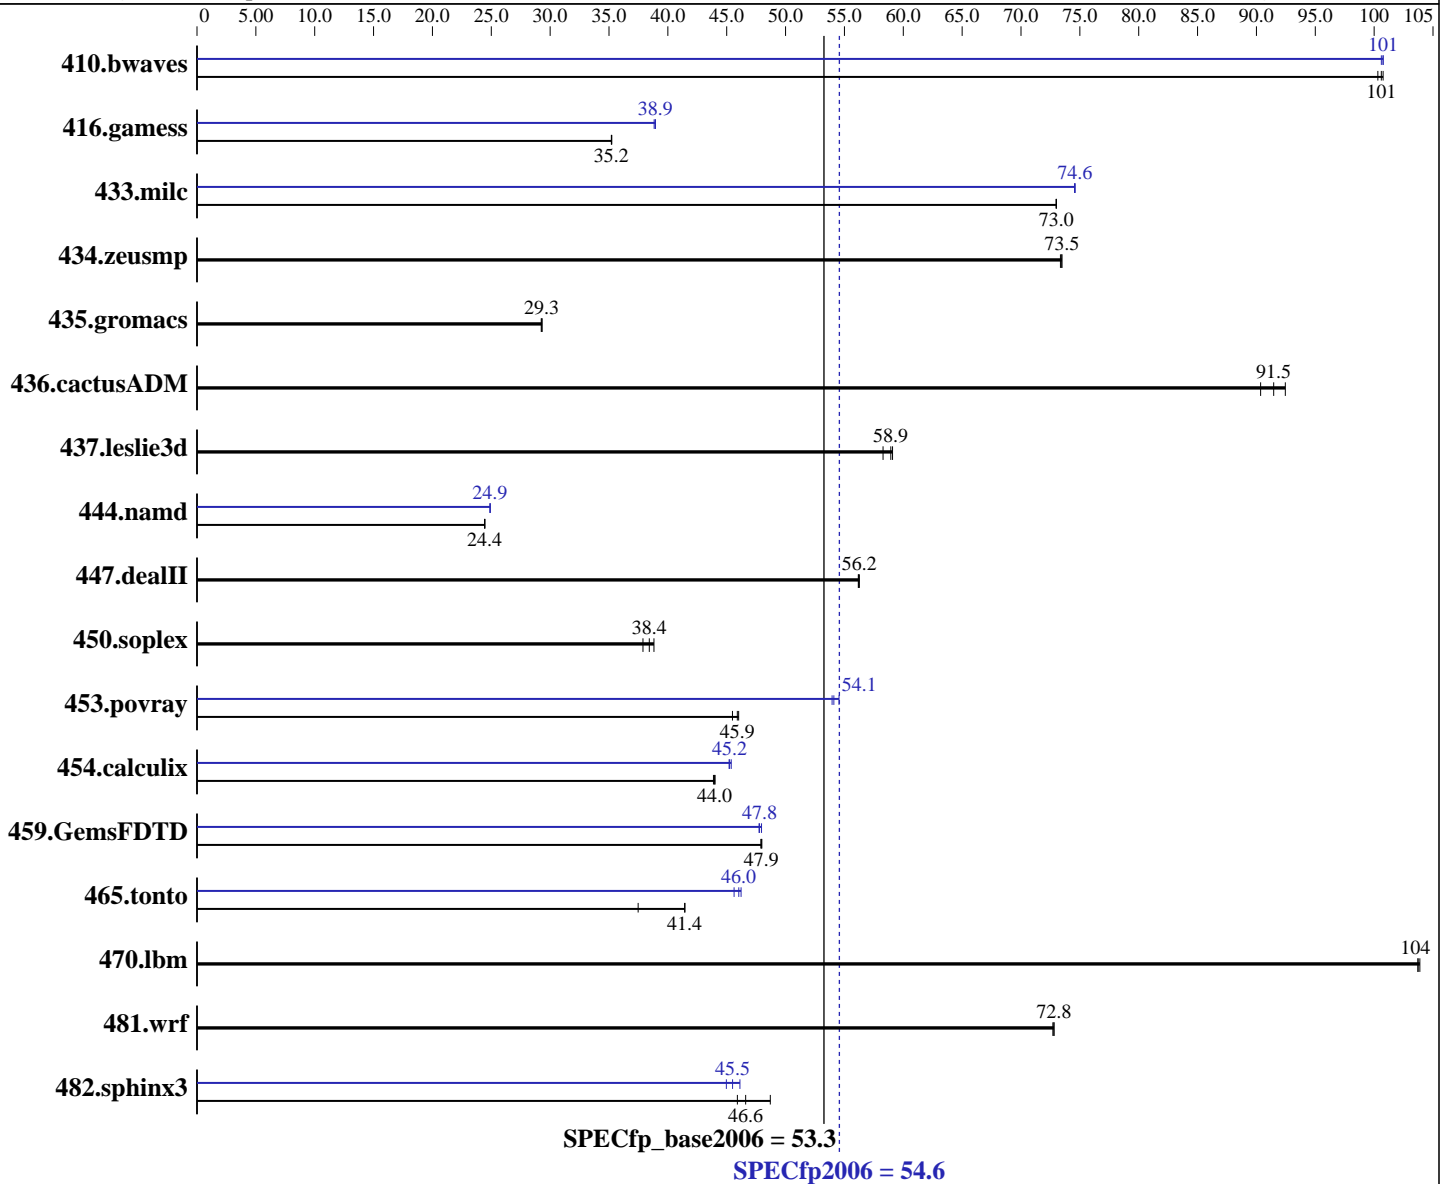

### Hardware

CPU Name: Intel Xeon E3-1220L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago), Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **54.6**

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220LV2)

SPECfp\_base2006 = **53.3**

CPU2006 license: 001176

Test date: May-2012

Test sponsor: Supermicro

Hardware Availability: May-2012

Tested by: Supermicro

Software Availability: Dec-2011

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	135	101	135	100	<b><u>135</u></b>	<b><u>101</u></b>	135	101	135	101	<b><u>135</u></b>	<b><u>101</u></b>
416.gamess	556	35.2	<b><u>556</u></b>	<b><u>35.2</u></b>	556	35.2	504	38.8	503	38.9	<b><u>503</u></b>	<b><u>38.9</u></b>
433.milc	<b><u>126</u></b>	<b><u>73.0</u></b>	126	73.0	126	73.0	123	74.5	<b><u>123</u></b>	<b><u>74.6</u></b>	123	74.6
434.zeusmp	124	73.5	<b><u>124</u></b>	<b><u>73.5</u></b>	124	73.4	124	73.5	<b><u>124</u></b>	<b><u>73.5</u></b>	124	73.4
435.gromacs	<b><u>244</u></b>	<b><u>29.3</u></b>	244	29.3	244	29.2	<b><u>244</u></b>	<b><u>29.3</u></b>	244	29.3	244	29.2
436.cactusADM	132	90.4	<b><u>131</u></b>	<b><u>91.5</u></b>	129	92.5	132	90.4	<b><u>131</u></b>	<b><u>91.5</u></b>	129	92.5
437.leslie3d	159	59.1	161	58.3	<b><u>159</u></b>	<b><u>58.9</u></b>	159	59.1	161	58.3	<b><u>159</u></b>	<b><u>58.9</u></b>
444.namd	<b><u>328</u></b>	<b><u>24.4</u></b>	328	24.5	328	24.4	322	24.9	<b><u>322</u></b>	<b><u>24.9</u></b>	322	24.9
447.dealII	<b><u>204</u></b>	<b><u>56.2</u></b>	203	56.3	204	56.2	<b><u>204</u></b>	<b><u>56.2</u></b>	203	56.3	204	56.2
450.soplex	215	38.8	<b><u>217</u></b>	<b><u>38.4</u></b>	220	37.9	215	38.8	<b><u>217</u></b>	<b><u>38.4</u></b>	220	37.9
453.povray	<b><u>116</u></b>	<b><u>45.9</u></b>	117	45.5	116	46.0	98.6	54.0	<b><u>98.3</u></b>	<b><u>54.1</u></b>	97.5	54.5
454.calculix	187	44.0	<b><u>188</u></b>	<b><u>44.0</u></b>	188	43.9	182	45.4	<b><u>182</u></b>	<b><u>45.2</u></b>	183	45.2
459.GemsFDTD	221	48.0	<b><u>221</u></b>	<b><u>47.9</u></b>	221	47.9	221	48.0	<b><u>222</u></b>	<b><u>47.8</u></b>	222	47.7
465.tonto	263	37.5	237	41.5	<b><u>238</u></b>	<b><u>41.4</u></b>	<b><u>214</u></b>	<b><u>46.0</u></b>	216	45.6	213	46.2
470.lbm	132	104	132	104	<b><u>132</u></b>	<b><u>104</u></b>	132	104	132	104	<b><u>132</u></b>	<b><u>104</u></b>
481.wrf	<b><u>153</u></b>	<b><u>72.8</u></b>	154	72.7	153	72.8	<b><u>153</u></b>	<b><u>72.8</u></b>	154	72.7	153	72.8
482.sphinx3	400	48.7	<b><u>418</u></b>	<b><u>46.6</u></b>	425	45.9	433	45.0	<b><u>428</u></b>	<b><u>45.5</u></b>	423	46.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 54.6**

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220LV2)

**SPECfp\_base2006 = 53.3**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = 54.6

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220LV2)

SPECfp\_base2006 = 53.3

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 54.6**

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220LV2)

**SPECfp\_base2006 = 53.3**

**CPU2006 license:** 001176

**Test date:** May-2012

**Test sponsor:** Supermicro

**Hardware Availability:** May-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:36:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 June 2012.