



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp<sup>®</sup>2006 = 66.2

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220V2)

SPECfp\_base2006 = 64.4

CPU2006 license: 001176


Test date: May-2012

Test sponsor: Supermicro

Hardware Availability: May-2012

Tested by: Supermicro

Software Availability: Dec-2011

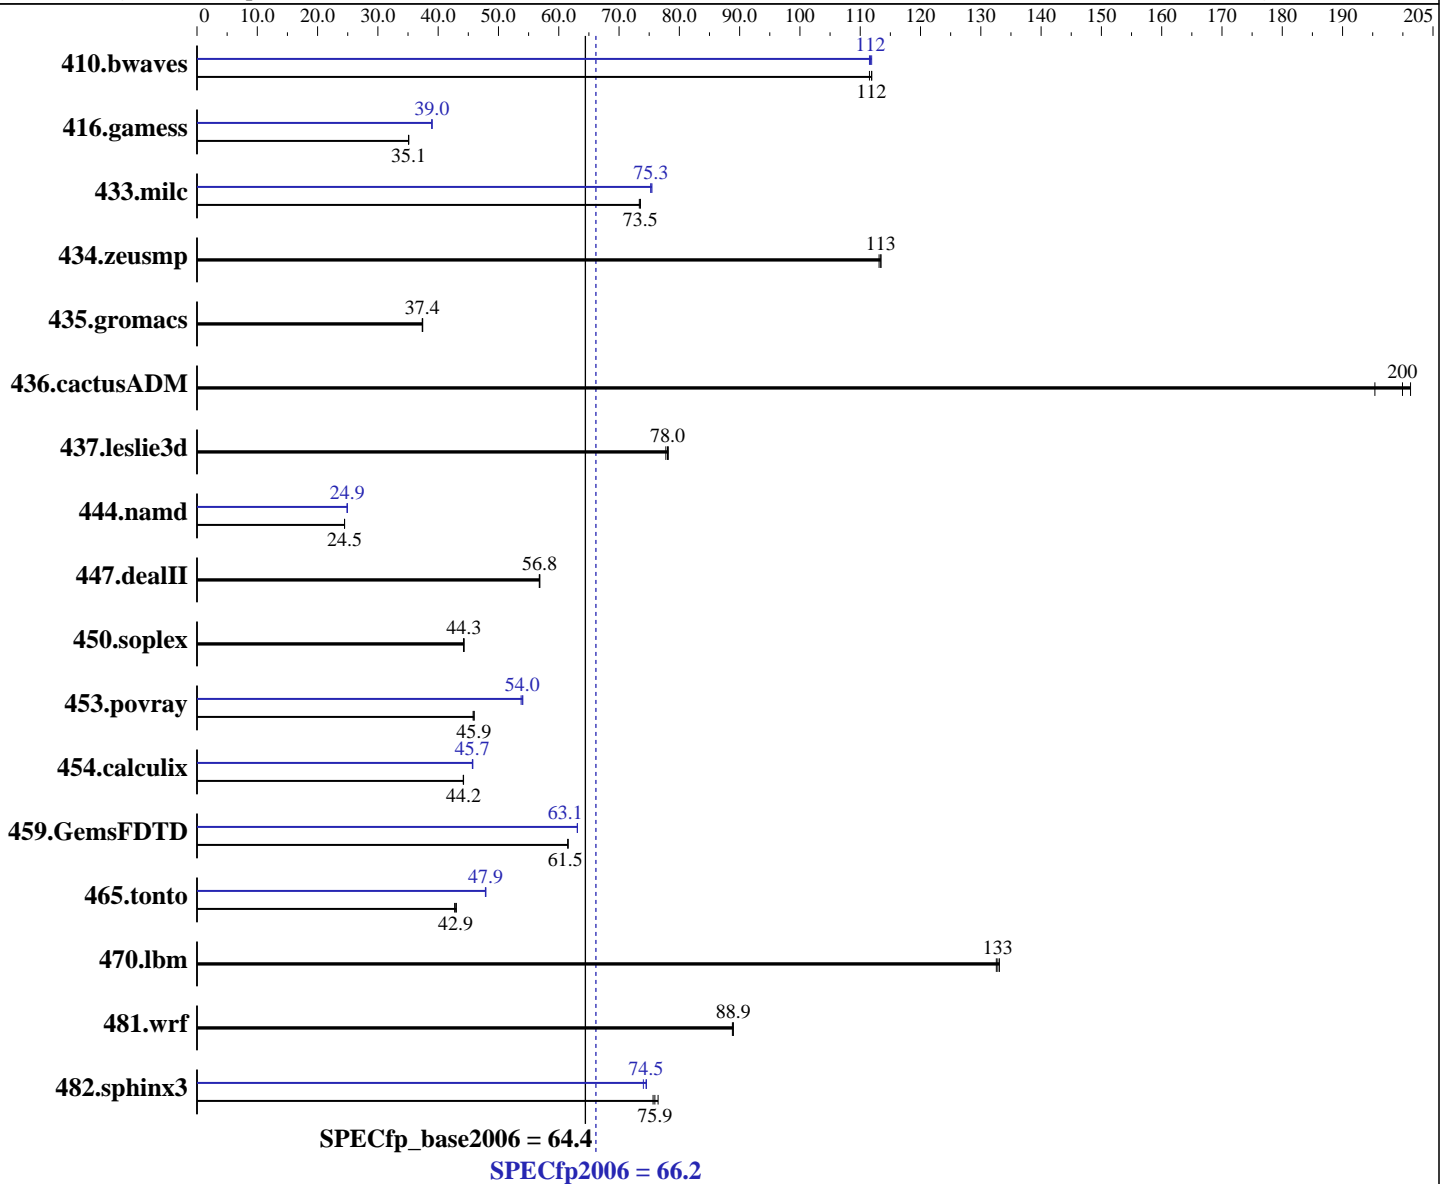

### Hardware

CPU Name: Intel Xeon E3-1220 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago), Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **66.2**

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220V2)

SPECfp\_base2006 = **64.4**

CPU2006 license: 001176

Test date: May-2012

Test sponsor: Supermicro

Hardware Availability: May-2012

Tested by: Supermicro

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>121</u></b>	<b><u>112</u></b>	121	112	122	112	121	112	<b><u>122</u></b>	<b><u>112</u></b>	122	112
416.gamess	557	35.1	<b><u>558</u></b>	<b><u>35.1</u></b>	558	35.1	503	38.9	502	39.0	<b><u>502</u></b>	<b><u>39.0</u></b>
433.milc	125	73.4	125	73.5	<b><u>125</u></b>	<b><u>73.5</u></b>	122	75.5	122	75.3	<b><u>122</u></b>	<b><u>75.3</u></b>
434.zeusmp	80.4	113	<b><u>80.2</u></b>	<b><u>113</u></b>	80.2	113	80.4	113	<b><u>80.2</u></b>	<b><u>113</u></b>	80.2	113
435.gromacs	<b><u>191</u></b>	<b><u>37.4</u></b>	191	37.4	191	37.4	<b><u>191</u></b>	<b><u>37.4</u></b>	191	37.4	191	37.4
436.cactusADM	<b><u>59.8</u></b>	<b><u>200</u></b>	61.2	195	59.4	201	<b><u>59.8</u></b>	<b><u>200</u></b>	61.2	195	59.4	201
437.leslie3d	121	77.8	120	78.2	<b><u>120</u></b>	<b><u>78.0</u></b>	121	77.8	120	78.2	<b><u>120</u></b>	<b><u>78.0</u></b>
444.namd	328	24.5	<b><u>328</u></b>	<b><u>24.5</u></b>	328	24.5	322	24.9	<b><u>322</u></b>	<b><u>24.9</u></b>	322	24.9
447.dealII	202	56.8	201	56.8	<b><u>201</u></b>	<b><u>56.8</u></b>	202	56.8	201	56.8	<b><u>201</u></b>	<b><u>56.8</u></b>
450.soplex	189	44.2	188	44.3	<b><u>188</u></b>	<b><u>44.3</u></b>	189	44.2	188	44.3	<b><u>188</u></b>	<b><u>44.3</u></b>
453.povray	<b><u>116</u></b>	<b><u>45.9</u></b>	116	45.8	116	46.0	99.0	53.8	98.4	54.0	<b><u>98.6</u></b>	<b><u>54.0</u></b>
454.calculix	187	44.2	<b><u>187</u></b>	<b><u>44.2</u></b>	187	44.2	180	45.8	<b><u>181</u></b>	<b><u>45.7</u></b>	181	45.7
459.GemsFDTD	172	61.5	<b><u>172</u></b>	<b><u>61.5</u></b>	172	61.5	168	63.1	<b><u>168</u></b>	<b><u>63.1</u></b>	168	63.1
465.tonto	230	42.7	<b><u>229</u></b>	<b><u>42.9</u></b>	229	43.0	206	47.8	205	47.9	<b><u>206</u></b>	<b><u>47.9</u></b>
470.lbm	<b><u>103</u></b>	<b><u>133</u></b>	103	133	104	133	<b><u>103</u></b>	<b><u>133</u></b>	103	133	104	133
481.wrf	126	88.8	<b><u>126</u></b>	<b><u>88.9</u></b>	126	88.9	126	88.8	<b><u>126</u></b>	<b><u>88.9</u></b>	126	88.9
482.sphinx3	258	75.6	255	76.5	<b><u>257</u></b>	<b><u>75.9</u></b>	261	74.5	263	74.0	<b><u>262</u></b>	<b><u>74.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,scatter"  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
 OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
 memory using RHEL5.5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 66.2

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220V2)

SPECfp\_base2006 = 64.4

CPU2006 license: 001176

Test date: May-2012

Test sponsor: Supermicro

Hardware Availability: May-2012

Tested by: Supermicro

Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 66.2**

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220V2)

**SPECfp\_base2006 = 64.4**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 66.2**

SuperServer 1017C-TF (X9SCL-F, Intel E3-1220V2)

**SPECfp\_base2006 = 64.4**

**CPU2006 license:** 001176

**Test date:** May-2012

**Test sponsor:** Supermicro

**Hardware Availability:** May-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:34:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 June 2012.